



The latest skid steer loader by LOCUST has over 40 years of experience backing it. LOCUST is the direct successor of the loader UNC produced by the same manufacturer with many years of experience, development and tradition combined to make this new loader.



L 1004

front loader manufactured in Slovakia has undergone many years of development culminating into today's LOCUST loaders. These loaders have been certified by testing and have proven themselves in a variety of practical applications (construction, agriculture, winter maintenance of roads and car parks) in many countries and under different weather and terrain conditions.



Combining years of experience and feedback from our satisfied clients, LOCUST is able to improve on the high-quality components such as engine, hydrostatic drive and construction design, offering high work efficiency and the most favourable price/performance ratio in its class.

since the first products by UNC were introduced in 1981, the skid steer



LOADER FEATURES

- low operating expenses
- high work efficiency
- easy operation
- high comfort
- unrivalled view from the cabin
- simple servicing and maintenance
- unobstructed accessibility of parts and components
- standard and ISO connection of attachments
- highly flexible and easily manoeuvrable
- long lifespan





WAY INDUSTRIES, a.s.
Priemyselná 937/4, 963 01 Krupina, SLOVAKIA

Tel: +421 45 5501 402
E-mail: info@way.sk

BUILDING THE  TO A BETTER WORLD

Locust 1004 / Locust 1004 Speed+ DIMENSIONS

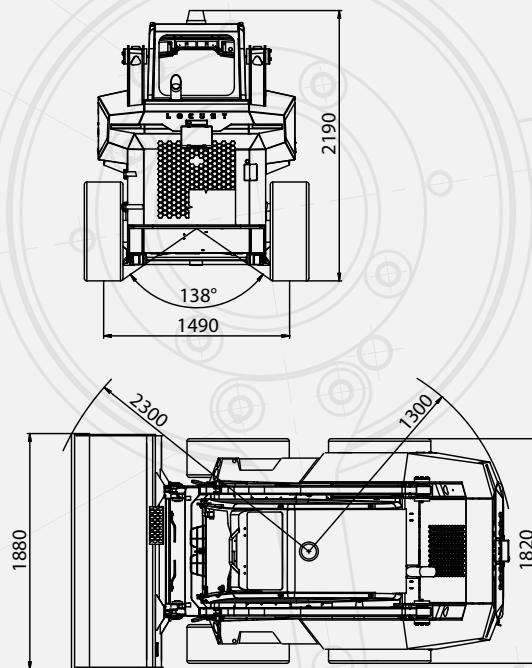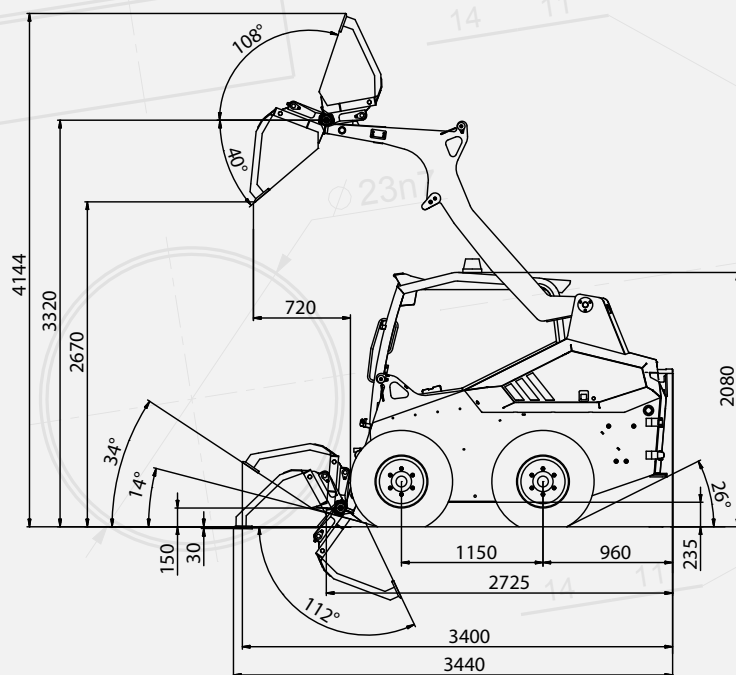

TECHNICAL PARAMETERS

L 1004 / L 1004 SPEED+

| | |
|---|-----------------------------|
| Loader height | 2,080 mm |
| Loader length with bucket | 3,440 mm |
| Loader width with bucket | 1,880 mm |
| Operating weight | 3,600 kg |
| Nominal loading capacity | 1000 kg |
| Maximum speed (L 1004 / L 1004 SPEED+) | 15 / 9.5 – 19 km/h |
| Bucket volume | 0.43 m |
| Breakout force | 26.8 kN |
| Tractive force (L 1004 / L 1004 SPEED+) | 32 / 38.5 kN |
| Lifting force | 18.9 kN |
| Engine model | PERKINS 904J-E28T |
| Power | 55.4 kW |
| Drive type | hydrostatic |
| Hydraulic pump of the working equipment | regulatory – LS/LUDV |
| Distributor of working equipment | with closed centre |
| Bucket balancing | hydraulic |
| Noise | 100 dB |
| Standard tyres | 12 – 16.5 |

Design and specifications are subject to change without notice.

Authorised business representative

