

ZGJO[®]

► Fire Extinguisher Series



SUPPORT IS AVAILABLE
ON WHATSAPP

| XUANCHENG JINDUN FIRE FIGHTING EQUIPMENT CO.,LTD

XuanCheng JinDun Fire Fighting Equipment Co.,Ltd
Add: Shizi Town,Langxi County, Anhui Province, China 242131
Phone: +86 150 6859 0372 (WhatsApp and WeChat)
Tel: +86 563 7889 558
<http://www.xc-jindunfire.com>

Develop and innovate . Strive for progress

➤ **目录**
CONTENTS


01	Contents
02-03	Company Profile
04-05	Company Honor
06-07	Product Sets
08-13	EN3 Series
14-15	EN1866 Series
16-17	AS/NZS Series
18-25	Other Fire Extinguisher Series
26	Hose Reel
27	Valves
28	Pressure gauge
29	Nozzle
30	Bracket/hook
31	Hose

公司简介 COMPANY PROFILE

- XUANCHENG JINDUN FIRE FIGHTING EQUIPMENT CO., LTD. (XCJD) is located in the Cross Industrial Park of Langxi County, Xuancheng City, Anhui Province, China. It is close to Langxi High-speed rail station, adjacent to Huzhou, Zhejiang Province and Nanjing, Jiangsu Province, making the company benefits from the super convenient Logistics & Supply Chain system.
- XCJD was established in April 2007, covers an area of 53,000 square meters, registered capital of 15 million, and now XCJD has become one of the most reputable manufacturers in China. With nearly 200 employees, 30 professional technicians and management personnel, XCJD is a modern enterprise integrating research and development, production and service of fire extinguishers and other equipment.
- The company has a solid technical force, advanced production equipment, superior manufacturing technology and proper testing equipment, ensuring customers could get the best quality products. XCJD has obtained CE certificates, SABS certificates, EN3-7 certificates (German MPA certification and British BSI certification), and processing UL certification. Since 2008, XCJD has obtained the ISO 9001 system certification, the third-level compliance enterprise certificate, the high-tech enterprise certificate, 60 patents granted, and 2 invention patent in 2017. The past 15 years have witnessed the XCJD offer customers stable quality products and perfect after-sales service.
- The company's main product categories are ABC dry powder portable storage, BC dry powder portable storage, cart ABC (BC) storage pressure, stainless steel fire extinguishers, water-based fire extinguishers, carbon dioxide fire extinguishers, and fire hoses, reels, fire hydrant system as well as many other accessories. With annual production capacity reach to more than two million fire extinguishers.



- The company focuses on the worldwide fire protection market and strives for the survival by the quality. Develop and innovate, strive for progress, and XCJD is looking forward to working with you to create a bright future together.

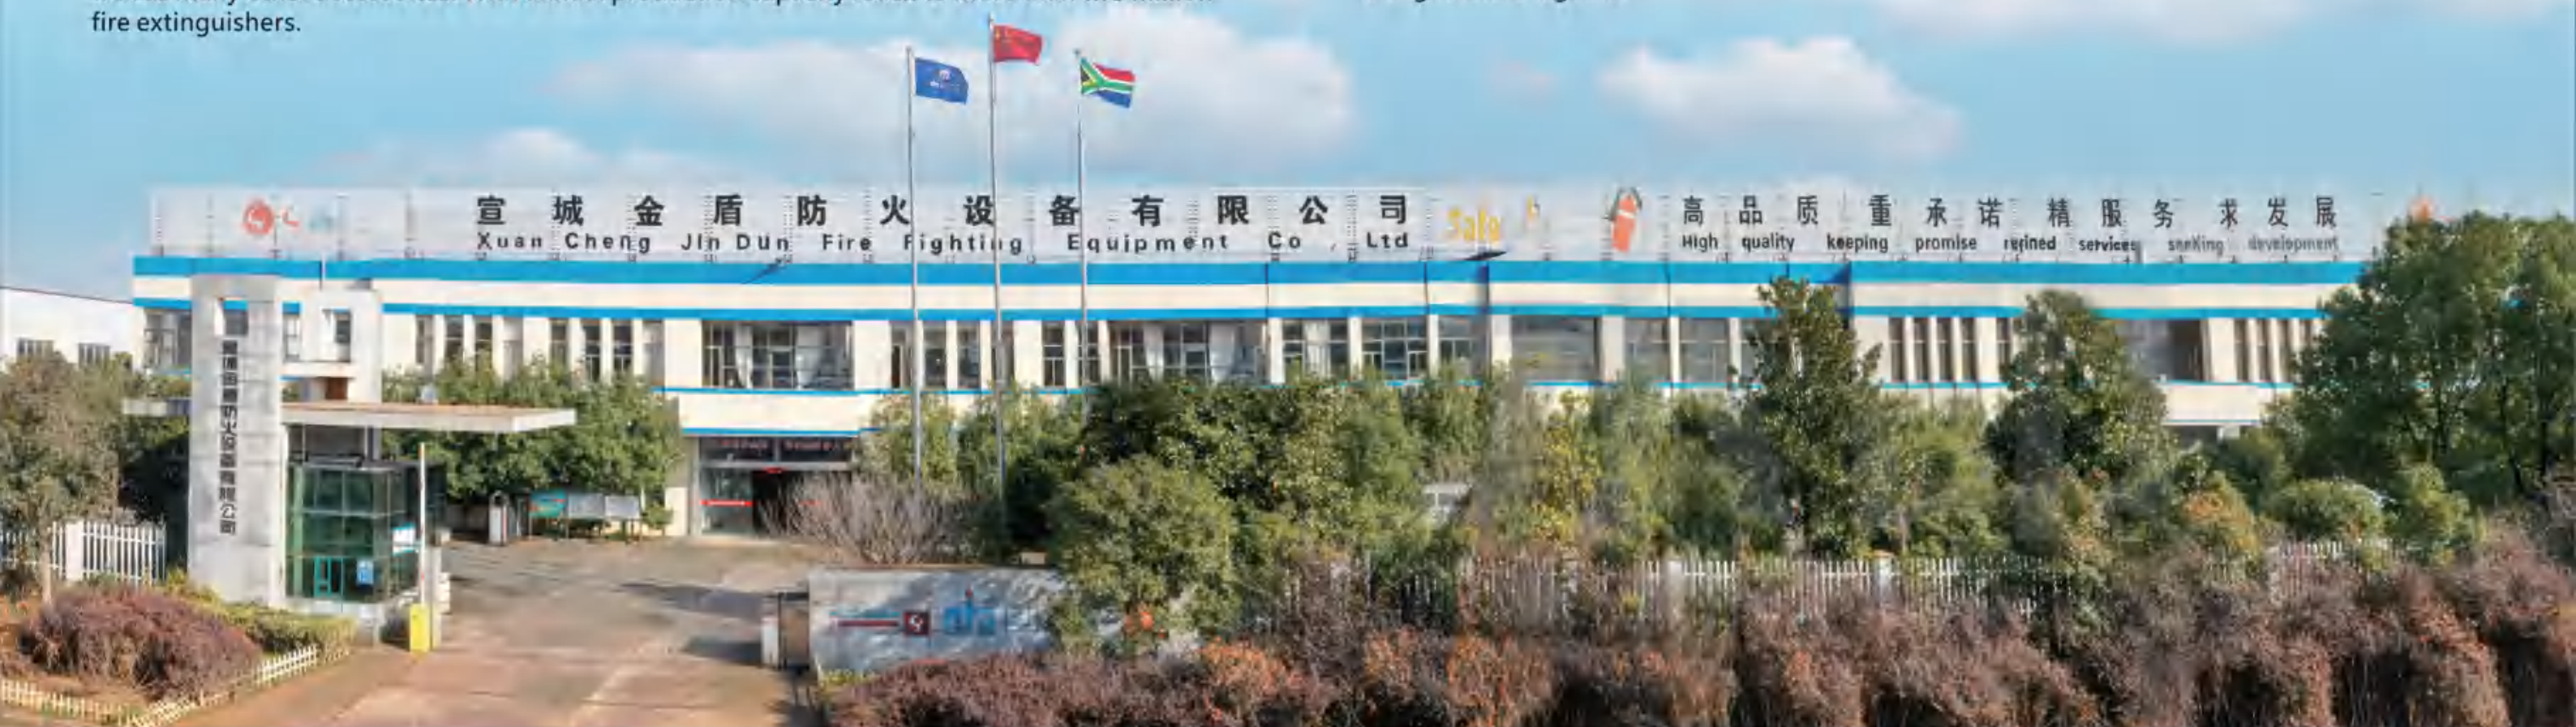

公司荣誉 COMPANY HONOR



• With strong scientific and technological strength, modern management methods and sincere enterprise spirit, the company has built an excellent customer relationship with fresh and loyal customers. At present, the products are mainly sold to South America, Southeast Asia, Europe, and South Africa (more than 50 countries all over the world).





Portable Powder Fire Extinguisher

Model:	JD-MFZ1-01
Out-diameter:	85mm
Material:	DC01/St12
Threaded:	M30x1.5-7H
Min-thickness:	0.80mm
Volume:	1.25L
Work pressure:	14BAR (20°C)
Test pressure:	30BAR
Temperature range:	-30 to +60°C
Ext Agent:	EN615 ABC40% powder
Weight:	2.07KG
Height:	364mm
Fire Class:	8A 34B C



Portable Powder Fire Extinguisher

Model:	JD-MFZ4-01
Out-diameter:	140mm
Material:	DC01/St12
Threaded:	M30x1.5-7H
Min-thickness:	1.17mm
Volume:	5.02L
Work pressure:	14BAR (20°C)
Test pressure:	30BAR
Temperature range:	-30 to +60°C
Ext Agent:	EN615 ABC40% powder
Weight:	6.30KG
Height:	480mm
Fire Class:	21A 113B C

Portable Powder Fire Extinguisher

Model:	JD-MFZ2-00
Out-diameter:	110mm
Material:	DC01/St12
Threaded:	M30x1.5-7H
Min-thickness:	1.07mm
Volume:	2.5L
Work pressure:	14BAR (20°C)
Test pressure:	30BAR
Temperature range:	-30 to +60°C
Ext Agent:	EN615 ABC40% powder
Weight:	3.8KG
Height:	405mm
Fire Class:	13A 55B C



Portable Powder Fire Extinguisher


Model:	JD-MFZ6-00
Out-diameter:	162mm
Material:	DC01/St12
Threaded:	M30x1.5-7H
Min-thickness:	1.17mm
Volume:	5.02L
Work pressure:	14BAR (20°C)
Test pressure:	30BAR
Temperature range:	-30 to +60°C
Ext Agent:	EN615 ABC40% powder
Weight:	6.30KG
Height:	480mm
Fire Class:	21A 113B C





Portable Powder Fire Extinguisher

Model:	JD-MFZ9-00
Out-diameter:	184mm
Material:	DC01/St12
Threaded:	M30x1.5-7H
Min-thickness:	1.32mm
Volume:	11.2L
Work pressure:	14BAR (20°C)
Test pressure:	30BAR
Temperature range:	-30 to +60°C
Ext Agent:	EN615 ABC40% powder
Weight:	13.4KG
Height:	585mm
Fire Class:	43A 233B C



Portable Foam Fire Extinguisher

Model:	JD-MPZ2-00
Out-diameter:	110mm
Material:	DC01/St12
Threaded:	M30x1.5-7H
Min-thickness:	1.07mm
Volume:	2.5L
Work pressure:	12BAR (20°C)
Test pressure:	30BAR
Temperature range:	+5 to +60°C
Ext Agent:	AFFF 3%
Weight:	3.9KG
Height:	415mm
Fire Class:	5A 34B


Portable Powder Fire Extinguisher

Model:	JD-MFZ12-01
Out-diameter:	184mm
Material:	DC01/St12
Threaded:	M30x1.5-7H
Min-thickness:	1.32mm
Volume:	13.0L
Work pressure:	14BAR (20°C)
Test pressure:	30BAR
Temperature range:	-30 to +60°C
Ext Agent:	EN615 ABC40% powder
Weight:	16.70KG
Height:	625mm
Fire Class:	55A 233B C



Portable Foam Fire Extinguisher

Model:	JD-MPZ6-00
Out-diameter:	162mm
Material:	DC01/St12
Threaded:	M30x1.5-7H
Min-thickness:	1.24mm
Volume:	7.50L
Work pressure:	12BAR (20°C)
Test pressure:	30BAR
Temperature range:	+5 to +60°C
Ext Agent:	AFFF 3%
Weight:	9.7KG
Height:	520mm
Fire Class:	13A



EN3 Series



Portable Foam Fire Extinguisher

Model:	JD-MFZ9-00
Out-diameter:	184mm
Material:	DC01/St12
Threaded:	M30x1.5-7H
Min-thickness:	1.32mm
Volume:	11.25L
Work pressure:	12BAR(20°C)
Test pressure:	30BAR
Temperature range:	+5 to +60°C
Ext Agent:	AFFF 3%
Weight:	13.78KG
Height:	585mm
Fire Class:	21A



Portable CO2 Fire Extinguisher

Model:	JD-MT2A-00
Out-diameter:	103mm
Material:	34CrMo4
Threaded:	PZ27.8
Min-thickness:	2.0mm
Volume:	3L
Work pressure:	174BRA
Test pressure:	250BAR
Temperature range:	-30 to +60°C
Ext Agent:	CO2
Weight:	6.2KG
Height:	565mm
Fire Class:	34B

Portable CO2 Fire Extinguisher

Model:	JD-MT5A-00
Out-diameter:	136mm
Material:	34CrMo4
Threaded:	PZ27.8
Min-thickness:	2.6mm
Volume:	7.5L
Work pressure:	174BAR
Test pressure:	250BRA
Temperature range:	-30 to +60°C
Ext Agent:	CO2
Weight:	14.2KG
Height:	750mm
Fire Class:	89B



> EN 1866 Series



Mobile Fire Extinguisher

Model:	JD-MFTZ50-01
Out-diameter:	300mm
Material:	Q235B
Threaded:	G2"
Min-thickness:	2.16mm
Volume:	56L
Work pressure:	14BAR (20°C)
Test pressure:	27BAR
Temperature range:	-30 to +60°C
Ext Agent:	EN615 ABC40% powder
Weight:	80KG
Height:	1060mm
Fire Class:	55A IIB C





Portable Powder Fire Extinguisher

Model:	XCJD-1.0ABE
Out-diameter:	85mm
Material:	DC01
Threaded:	M24X1.5
Min-thickness:	0.75mm
Volume:	1.25L
Work pressure:	15BAR (23°C)
Test pressure:	26BAR
Temperature range:	-30 to +65°C
Ext Agent:	ABC20%+70%powder
Weight:	1.85KG
Height:	335mm
Fire Class:	1A 10B E



Portable Powder Fire Extinguisher

Model:	XCJD-4.5ABE
Out-diameter:	140mm
Material:	DC01
Threaded:	M30X1.5
Min-thickness:	1.25mm
Volume:	5.5L
Work pressure:	15BAR (23°C)
Test pressure:	26BAR
Temperature range:	-30 to +65°C
Ext Agent:	ABC70%+20%powder
Weight:	7.0KG
Height:	512mm
Fire Class:	3A 40B E

Portable Powder Fire Extinguisher

Model:	XCJD-2.5ABE
Out-diameter:	120mm
Material:	DC01
Threaded:	M30X1.5
Min-thickness:	1.07mm
Volume:	3.0L
Work pressure:	15BAR (23°C)
Test pressure:	26BAR
Temperature range:	-30 to +65°C
Ext Agent:	ABC70%+20%powder
Weight:	4.25KG
Height:	410mm
Fire Class:	2A 20B E



Portable Powder Fire Extinguisher

Model:	XCJD-9.0ABE
Out-diameter:	184mm
Material:	DC01
Threaded:	M30X1.5
Min-thickness:	1.64mm
Volume:	11.6L
Work pressure:	15BAR (23°C)
Test pressure:	26BAR
Temperature range:	-30 to +65°C
Ext Agent:	ABC70%+20%powder
Weight:	13.35KG
Height:	585mm
Fire Class:	3A 60B E





Non-refillable Fire Extinguishers

Model:	JD-AJ01
Out-diameter:	85mm
Height:	275mm
Material:	DC01/St12
Min-thickness:	1.5mm



Automatic Fire Extinguisher

Model:	XGTT4.0A	Model:	XGTT6.0A	Model:	XGTT9.0A
Out-diameter:	250mm	Out-diameter:	250mm	Out-diameter:	350mm
Height:	85mm	Height:	100mm	Height:	100mm
Material:	DC01/St12	Material:	DC01/St12	Material:	DC01/St12
Min-thickness:	/	Min-thickness:	/	Min-thickness:	/

Non-refillable Cylinder

Model:	0.95L
Out-diameter:	70mm
Height:	305mm
Material:	HP265
Min-thickness:	2.52mm
Working Temperature:	-20/+65°C
Test Pressure:	180BAR



Non-refillable Fire Extinguishers

Model:	MFZ1.0A
Out-diameter:	85/90mm
Height:	292mm
Material:	DC01/St12
Min-thickness:	0.8mm



CE



▲ PED/CE Cylinder

Model:	JD-SUS2-00	JD-SUS6-00	JD-SUS9-00
Out-diameter:	110mm	162mm	180mm
Height:	335mm	450mm	545mm
Material:	SUS304		
Min-thickness:	≥0.66mm		



Cartridge Fire Extinguishers



Wet Chemical



ZGJO®



▶ Portable Powder Fire Extinguisher



▶ Portable CO2 Fire Extinguisher

▶ Portable Water Base Fire Extinguisher



▶ Mobile Fire Extinguisher

Name	Portable Powder Extinguisher				Portable Water base Extinguisher				Portable CO2 Extinguisher			Non-refillable Extinguisher		Mobile Fire Extinguisher			
	2KG	3KG	4KG	5KG	2L	3L	6L	9L	2KG	3KG	5KG	950g	950ml	35KG	50KG	30L	45L
Model	MFZ/ABC2	MFZ/ABC3	MFZ/ABC4	MFZ/ABC5	MSZ/2	MSZ/3	MSZ/6	MSZ/9	MT/2	MT/3	MT/5	MFJ950	MSWJ950	MFTZ/ABC35	MFTZ/ABC50	MSTZ/30	MSTZ/45
Standard	GB4351.1-2005										XF86-2009		GB8109-2005				
Fire Class	1A 21B C E	2A 34B C E	2A 55B C E	3A 89B C E	1A 55B E	2A 89 B E	3A 113B E		21B C E	34B C E		0.5A 13B C E 5F	0.5A 21B E 5F	6A 294B C E	10A 297B C E	6A 297B	10A 297B
Temperature range	-20/+55℃				5/+55℃				-10/+55℃			-20/+55℃	5/+55℃	-20/+55℃		5/+55℃	
Extinguishing agent	ABC75%+ABC15%				S-3-AB				CO2(99.5%)			ABC75%+15%	S-3-AB	ABC75%+15%		S-3-AB	
Work pressure	1.2Mpa(20℃)								16.7Mpa			1.0Mpa(20℃)		1.2Mpa(20℃)			
test pressure	2.1Mpa								25.1Mpa			1.3Mpa		2.1Mpa			
Out-diameter	110mm	135mm			110mm	135mm	178mm		116mm		136mm	85mm		315mm			
Height	370mm	410mm	480mm	570mm	410mm	430mm	460mm	645mm	480mm	645mm	760mm	340mm	335mm	1020mm	1250mm	1020mm	1250mm
Weight	3.4KG	4.8KG	6.2KG	8KG	3.8KG	5.3KG	9.8KG	14KG	6.3KG	8.75KG	14KG	1.8KG	1.85KG	58KG±3KG	83KG±3kg	56KG±3KG	78KG±3KG



JD3009



JD3005



JD3002



JD3007



JD4001



JD1408A



JD-7011



JD1102



JD1501



JD1408



JD1404



JD1401



JD-0.25G-01



JD1109



JD1111



JD2001



JD-YP



JD7012



JD1101A



JD1114



XCJD-AJ22-01



JD-YLB01



JD-YLB02



JD-YLB03



JD-YLB04



JD-YLB05



JD-YLB06



JD-NZ01



JD-NZ02



JD-NZ03



JD-NZ04



JD-NZ05



JD-NZ06



JD-NZ07



JD-NZ08



JD-NZ09



JD-NZ010



JD-GG01



JD-GG02



JD-GG03



JD-GG04



JD-GG05



JD-GG06



JD-GG07



JD-GG08



JD-GG09



JD-GG10



JD-GG11



JD-GG12



JD-GG13



JD-GG14



JD-GG15



JD-GG16



JD-GG17



JD-GG18



JD-GG19



JD-GG20



JD-GG21



JD-GG22



JD-GG23



JD-PG01



JD-PG02



JD-PG03



JD-PG04



JD-PG05