



**SACA**  
— europe —

## AGV & drones

AGVs are self-driving vehicles that transport materials or goods in manufacturing, warehousing, and logistics environments. They are programmed to follow a predetermined path and can operate 24/7 without human intervention. Drones can perform a variety of tasks, from surveillance and inspection to delivery and search and rescue operations. Both AGVs and drones are equipped with sensors, cameras, and other technologies that enable them to navigate and interact with their environment autonomously, making them invaluable tools in increasing efficiency, reducing costs, and improving safety in various industries.


## manufacturers

---

---

---



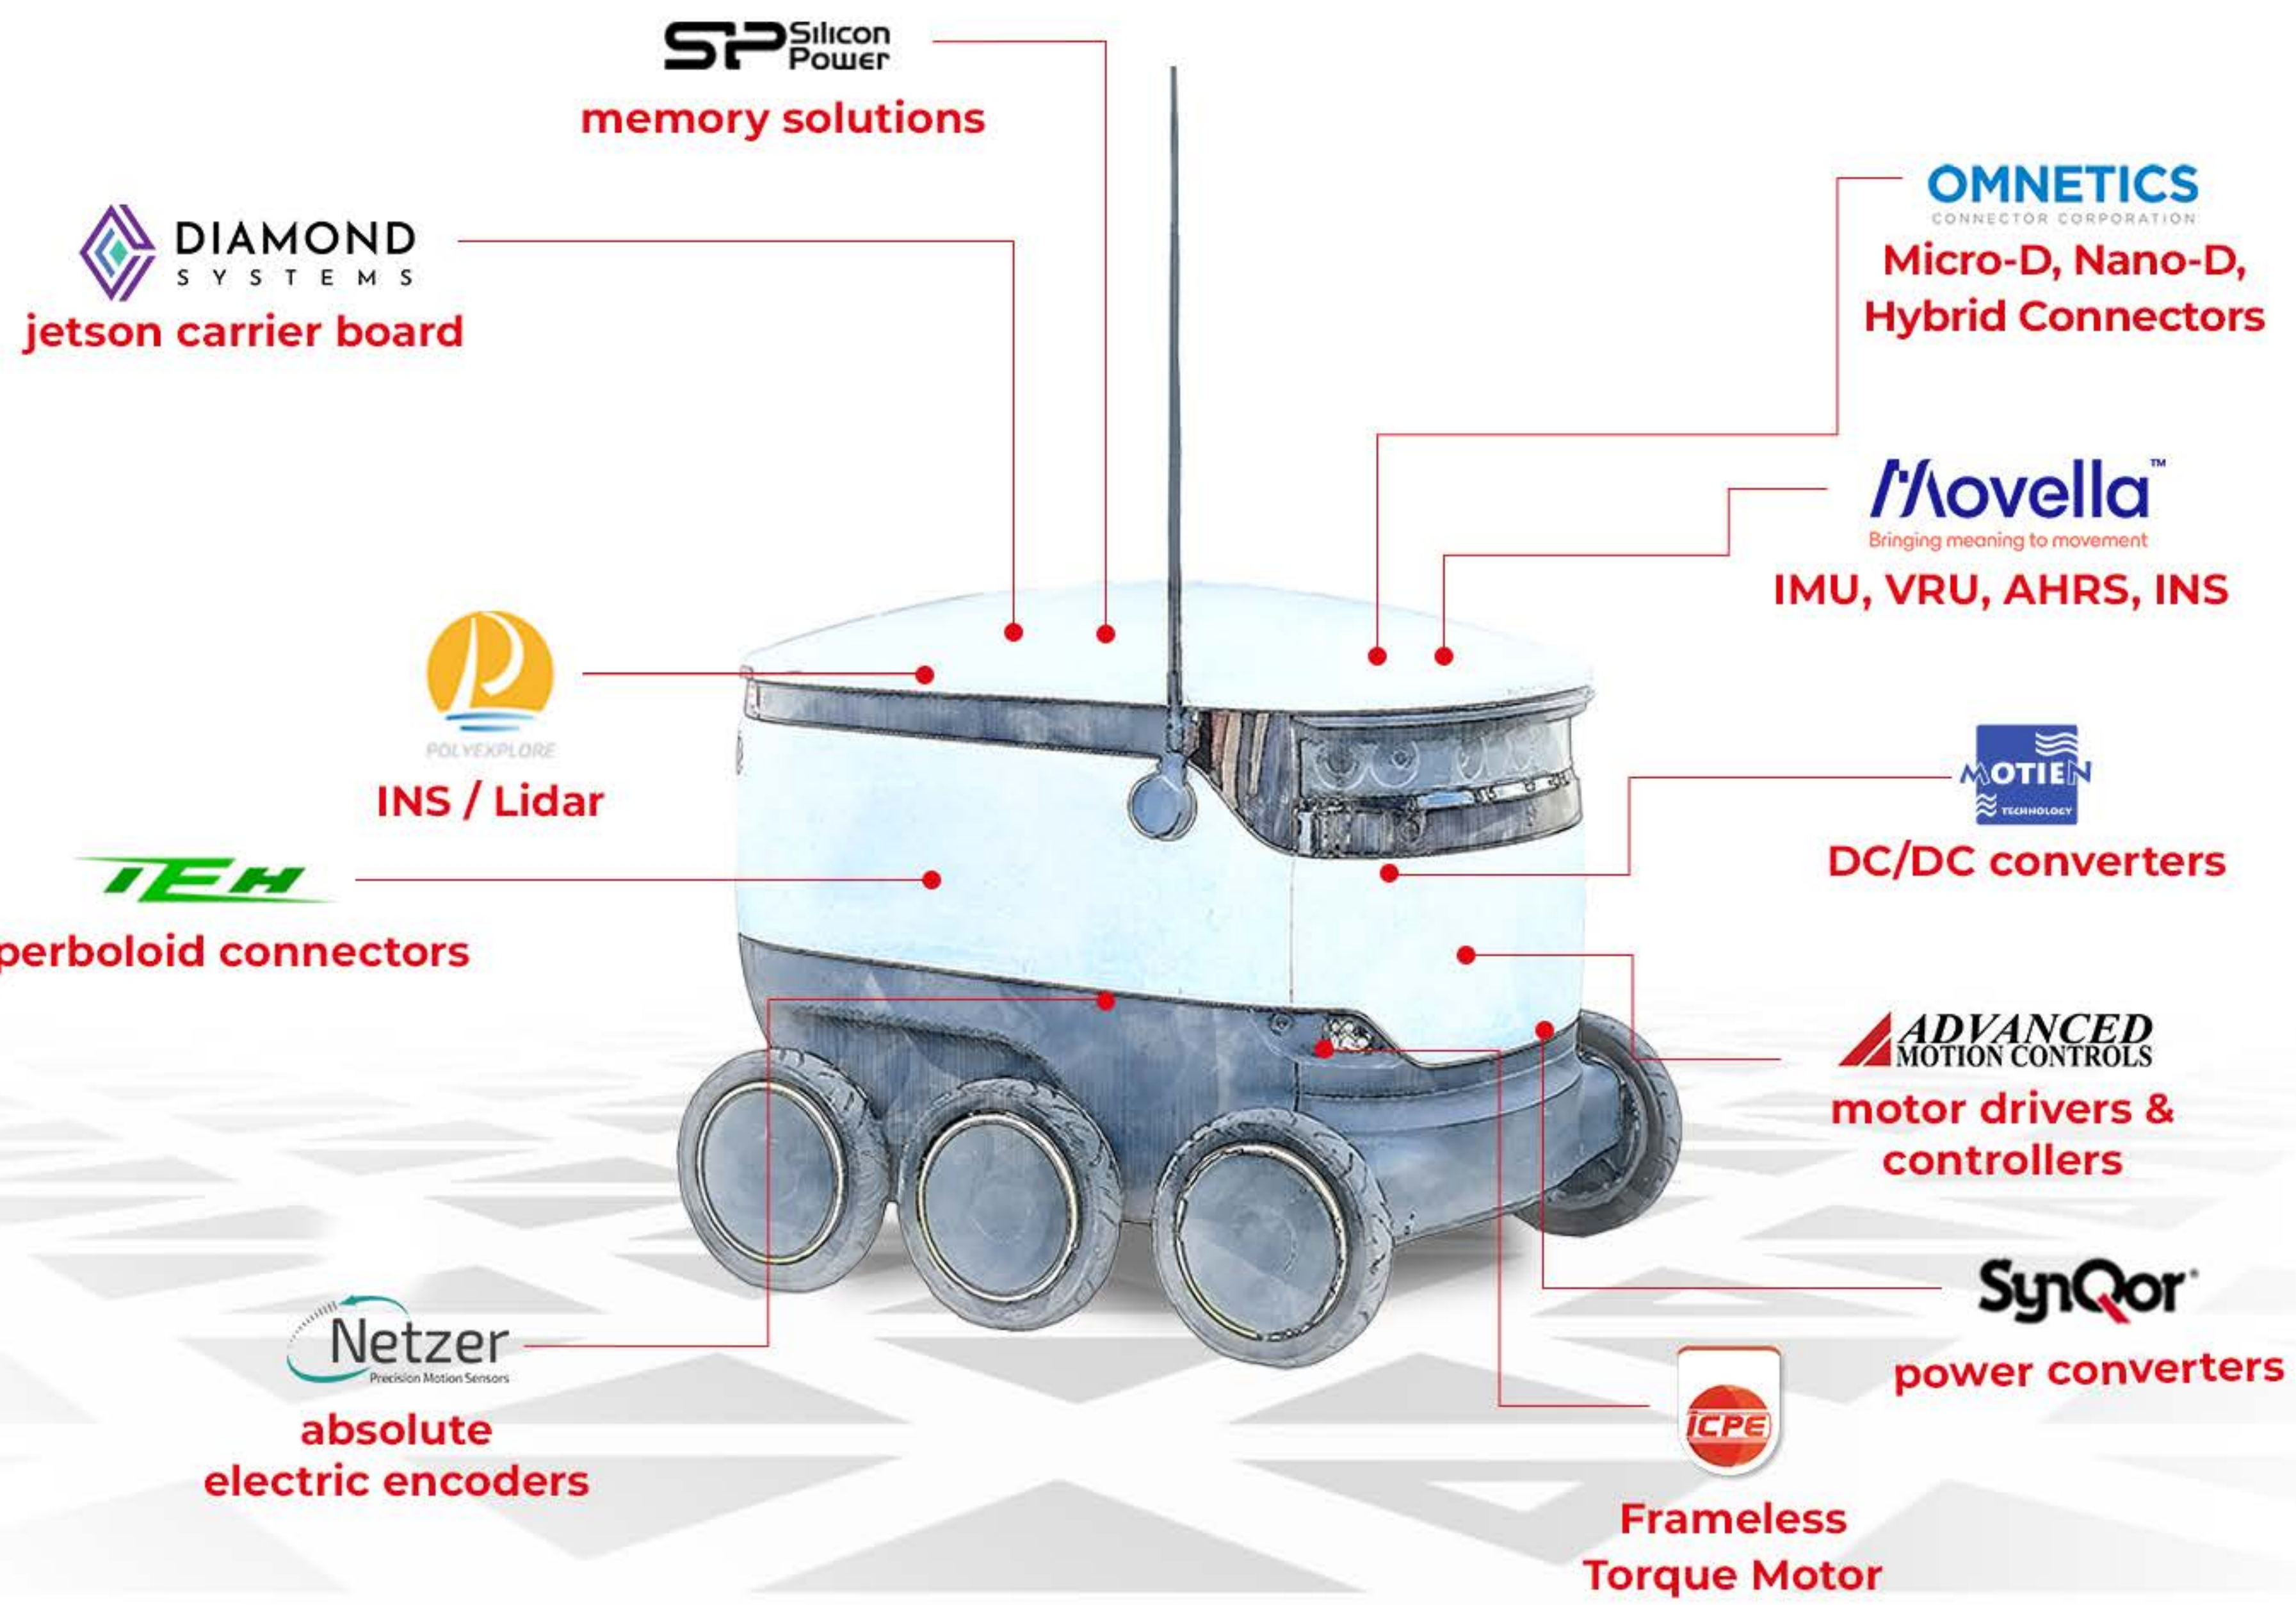

**SP Silicon Power**  
memory solutions

**DIAMOND SYSTEMS**  
jetson carrier board

**OMNETICS**  
CONNECTOR CORPORATION  
Micro-D, Nano-D,  
Hybrid Connectors

**Movella™**  
Bringing meaning to movement  
IMU, VRU, AHRS, INS

**POLYEXPLORE**  
INS / Lidar

**MOTIEN**  
TECHNOLOGY  
DC/DC converters

**TEH**  
hyperboloid connectors


**ADVANCED MOTION CONTROLS**  
motor drivers & controllers

**Netzer**  
Precision Motion Sensors  
absolute electric encoders

**SynQor®**  
power converters

**ICPE**  
Frameless Torque Motor



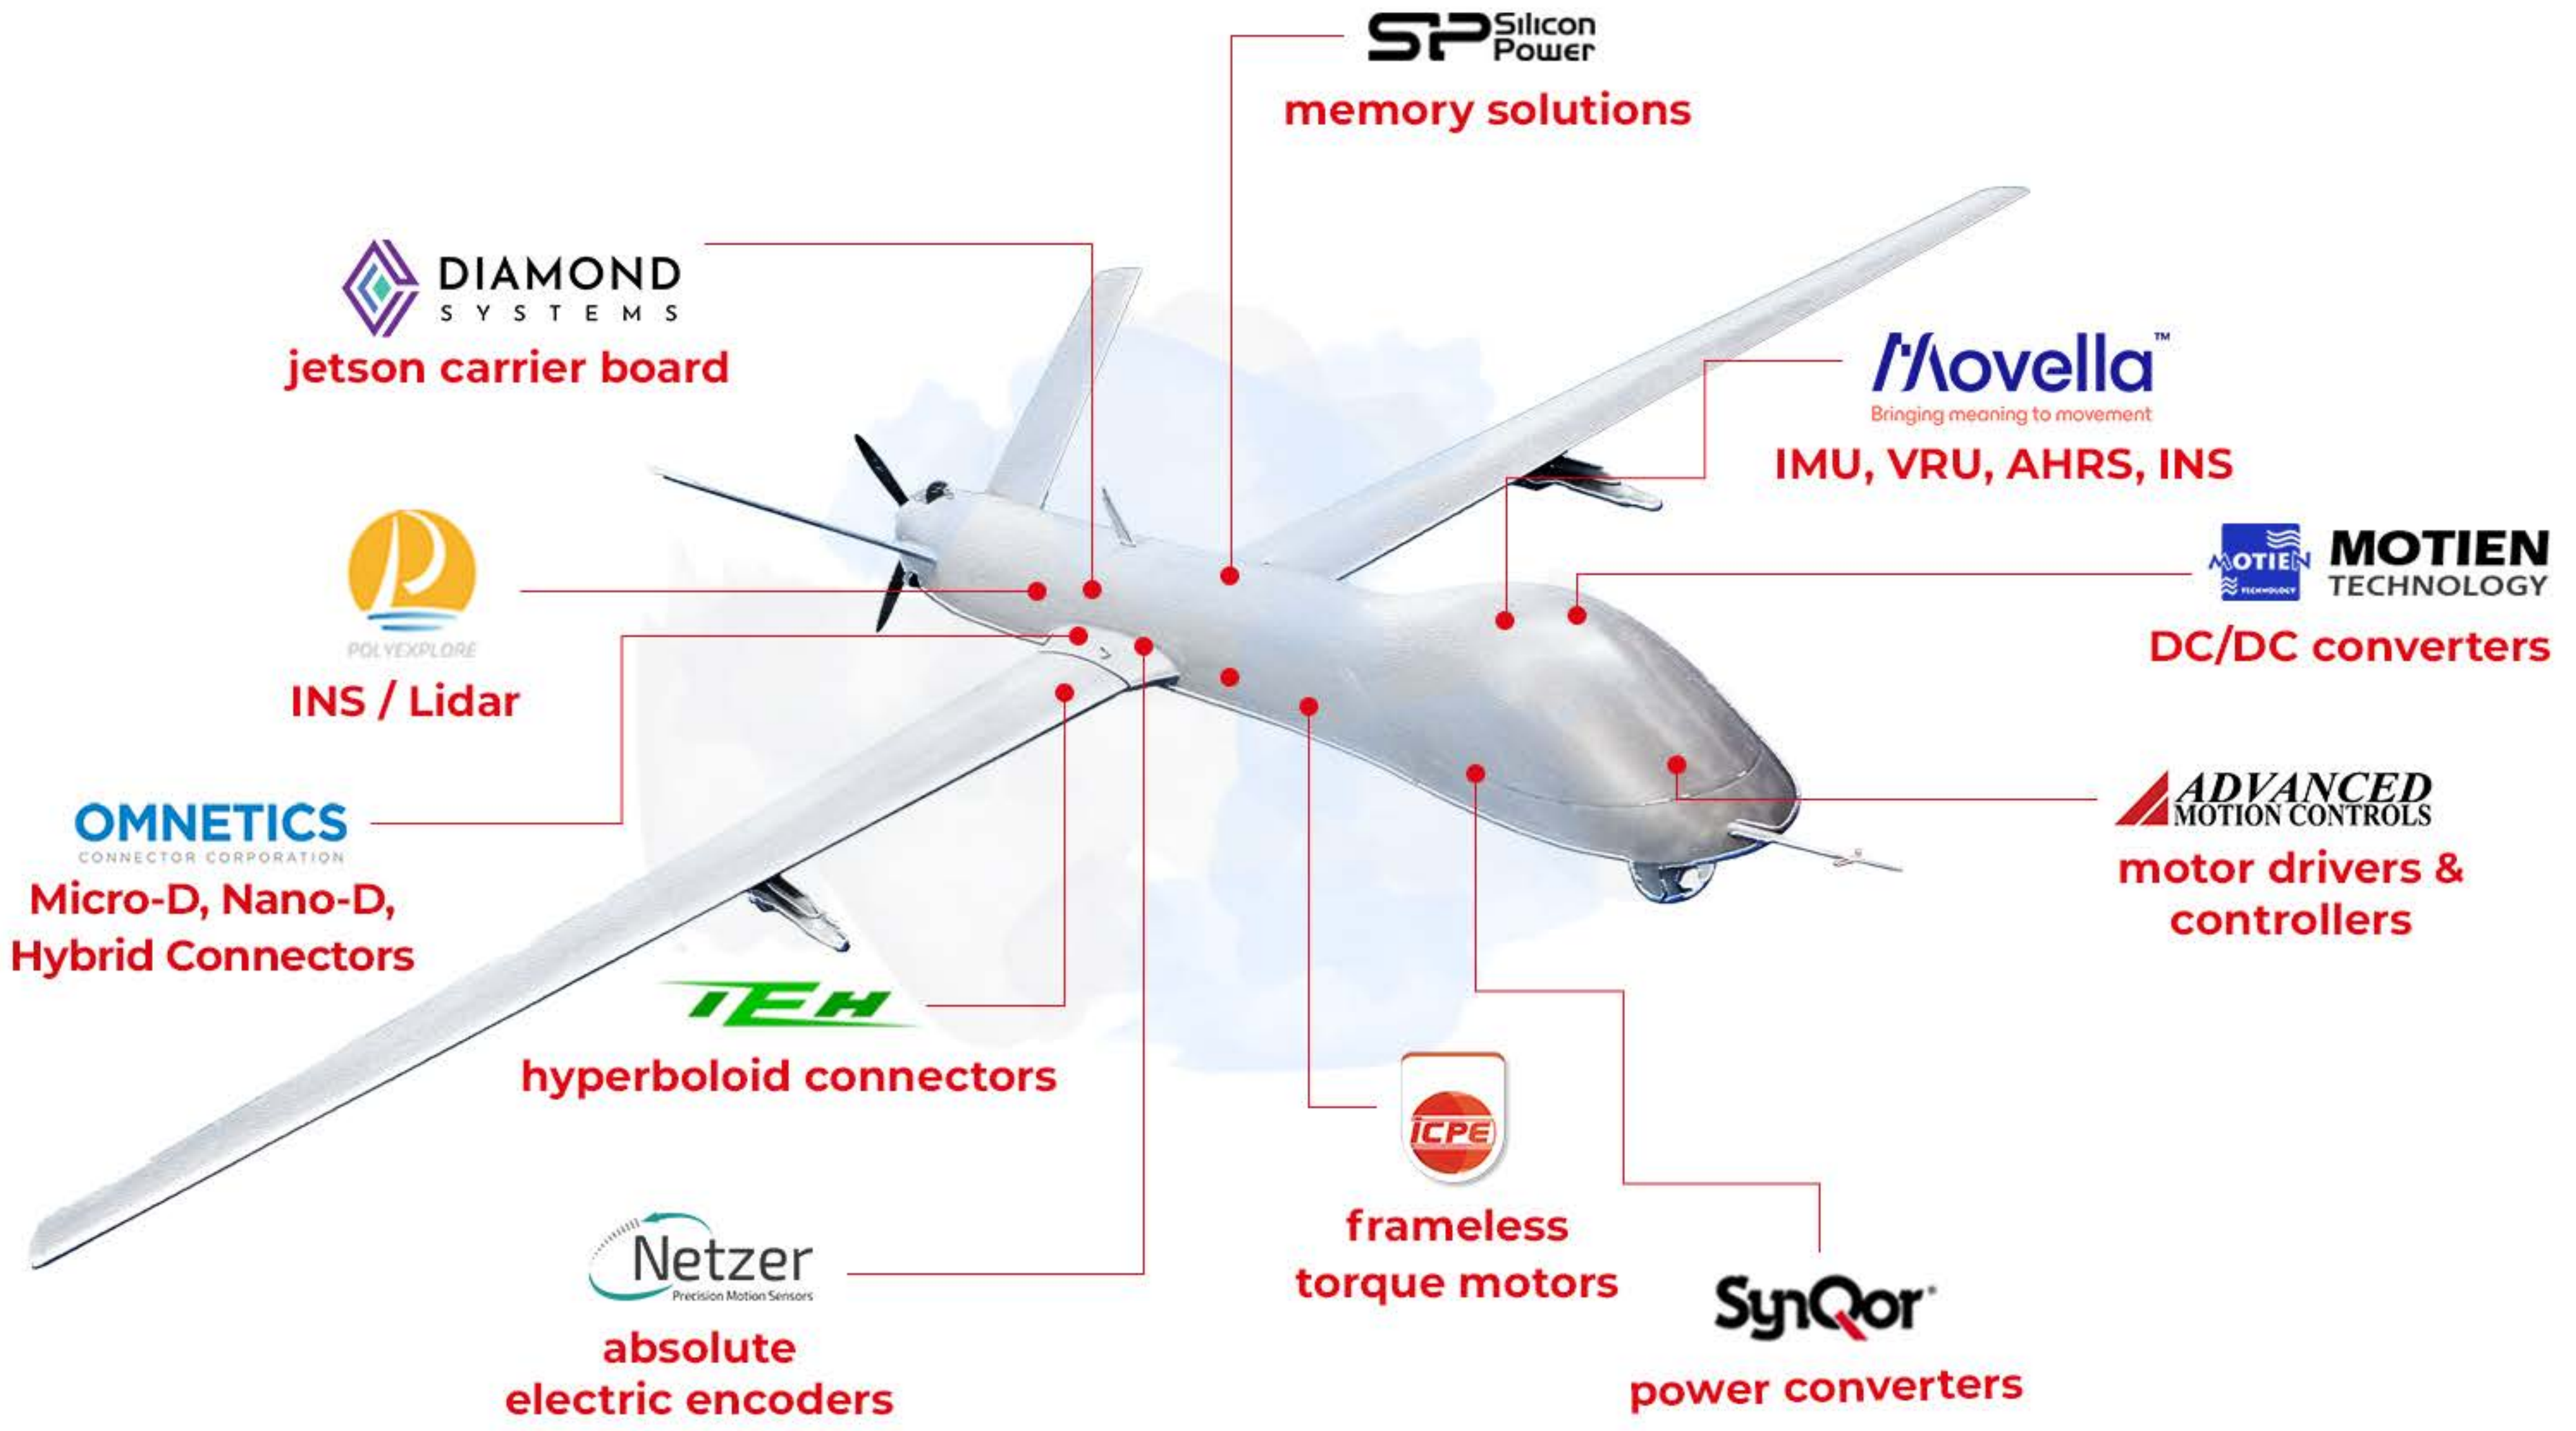

**SP** Silicon Power  
memory solutions

**Novella**<sup>™</sup>  
Bringing meaning to movement  
IMU, VRU, AHRS, INS

**MOTIEN**  
TECHNOLOGY  
DC/DC converters

**ADVANCED**  
MOTION CONTROLS  
motor drivers & controllers

**ICPE**  
frameless torque motors

**SynQor**<sup>®</sup>  
power converters

**Netzer**  
Precision Motion Sensors  
absolute electric encoders

**TEH**  
hyperboloid connectors

**OMNETICS**  
CONNECTOR CORPORATION  
Micro-D, Nano-D, Hybrid Connectors

**POLYEXPLORE**  
INS / Lidar

**DIAMOND**  
SYSTEMS  
jetson carrier board





# SYNQOR

www.synqor.com

## COMPANY OVERVIEW

SynQor® is a leading supplier of power conversion solutions to the military, industrial, transportation, telecom/ datacom and medical markets. SynQor's innovative products are designed to exceed the demanding performance, quality, and reliability requirements of today's power electronic engineers and system integrators who develop leading-edge infrastructure hardware.

## NIQOR NON-ISOLATED DC-DC CONVERTER



### BATTER CHARGING

- ▶ Provides the power conversion platform for battery charging
- ▶ Output current limit is externally controlled for constant-current charging
- ▶ Current can be set with an external resistor or an active circuit
- ▶ Current analog signal provided for instrumentation and control functions
- ▶ Ideal diode output stage with zero back-drive currents prevents discharge of battery when not charging
- ▶ discharge of battery when not charging
- ▶ Output voltage set-point is independently controlled through trim pin
- ▶ Unit will smoothly transition between current and voltage modes as charging cycle needs charge

### KEY FEATURES

- ▶ Ultra-high efficiency up to 95%
- ▶ Wide input voltage ranges:
  - ▶ 9-20 V (NQ20); 9-40 V (NQ40); 9-60 V (NQ60/MCOTS-N-28V);
  - ▶ 9-90 V (NQ90/MCOTS-N-28VE)
- ▶ Non-isolated
- ▶ Buck or Buck/Boost topologies available
- ▶ Maximum input/output currents up to 55 A
- ▶ On-board input and output filtering
- ▶ No minimum load requirement
- ▶ Remote sense and wide output voltage trim
- ▶ Input under-voltage lockout (UVLO)
- ▶ Output current limit (OCP) and short circuit protection
- ▶ Output over-voltage protection (OVP)
- ▶ Thermal shutdown (OTP)
- ▶ Output voltage trim
- ▶ No maximum external output capacitance
- ▶ Active current sharing for higher power applications (half-brick only)

### SYNQOR ADVANTAGES

- ▶ No maximum external output capacitance
- ▶ Higher power in smaller package sizes
- ▶ Current limit control and current monitoring
- ▶ Wide input and output voltage options
- ▶ Adjustable current limit
- ▶ Adjustable power limit

<b>Input Voltage</b>	9 - 20 V, 9 - 40 V, 9 - 60 V, 9 - 90 V
<b>Output Voltage</b>	0 - 20 V, 0 - 40 V, 0 - 60 V, 0 - 90 V
<b>Output Power</b>	120 W - 2000 W
<b>Output Current</b>	5 A - 55 A
<b>Full Load Efficiency</b>	Up to 96%
<b>Industrial Operating Temperature</b>	-40°C to +100°C
<b>Military Operating Temperature</b>	-55°C to +100°C



# MOTIEN TECHNOLOGY

[www.motien.com.tw](http://www.motien.com.tw)

## COMPANY OVERVIEW

MOTIEN Technology is the professional and leading manufacturer of power solution since the establishment on 1998, with the great efforts and continually improvement for decades on power supplies, the brand MOTIEN has become well known and a symbol of quality and preferred & trusted DC power source.

Motien has more than 30 series of DC/DC converters, LED drivers and AC/DC converter modules. Products are widely built in modern electronic equipments: Industries Automation equipments, Telecommunication equipments, instruments, transportation system, medical equipments etc.

### ● GENERAL SPECIFICATION

- Power rating: 0.25W~60W
- DC / DC converters, LED drivers
- Customized products
- Minor change of standard product
- New product development

## PRODUCT GROUPS



RAILWAY SERIES

SMD SERIES

LED DRIVERS

ISOLATED DC/DC CONVERTERS

- ▶ SIP-Packages
- ▶ DIP-Packages

NON - ISOLATED DC/DC CONVERTERS

- ▶ SIP-Packages
- ▶ SMD-Packages



# OMNETICS

[www.omnetics.com](http://www.omnetics.com)

## COMPANY OVERVIEW

Omnetics is a world-class miniature connector design and manufacturing company with over 30 years of experience, focused on Micro-miniature and Nano-miniature highly reliable electronic connectors and interconnection systems. Our miniature connectors are designed and assembled in a single location at our plant in Minneapolis, Minnesota.

### SINGLE ROW NANO-D

Horizontal SMT (AA)	Vertical SMT (VV)	Straight Tails (DD)	Thru-Hole Horizontal (H2)	Thru-Hole Vertical (V2)	Pre-Wired (W2)	Jumpers (JU)	MILDTL-32139 QPL


### LATCHING NANO-D

Surface Mount (AA)	Flex Mount (FF)	Straight Thru-Hole (DD)	Pre-Wired (WD)

### LOW PROFILE MICRO-D


Discrete Wired (WD)	Right Angle Thru-Hole (H1)	Right Angle Thru-Hole (R2)	Solder Cup (SS)	Straight Thru-Hole (S2)

#### ● Power and Signal Micro Hybrids: 10A, 5A, 3A

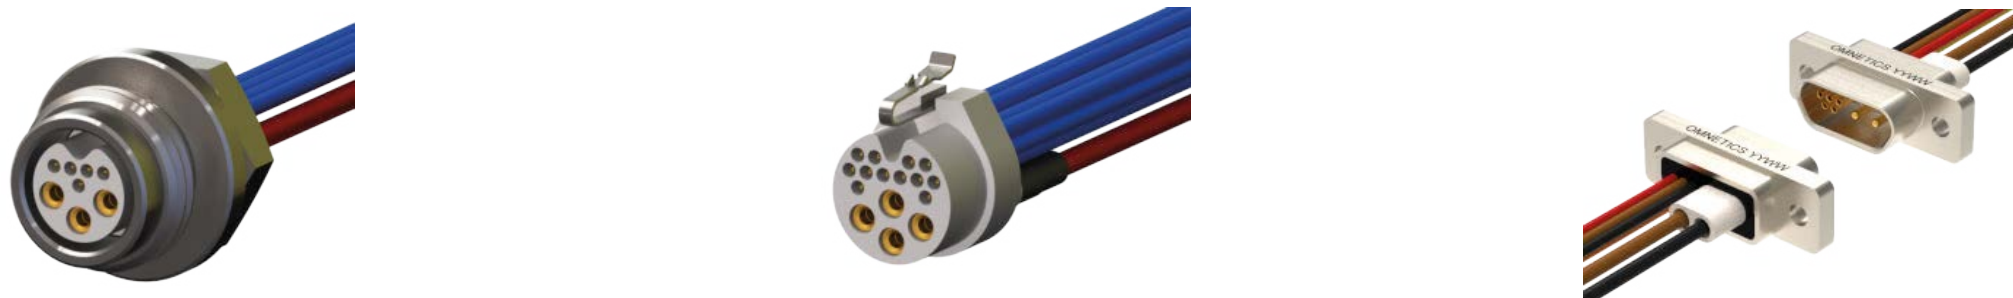

#### ● Nano Coax Connectors

Omnetics Nano Coax contacts are available either in a Hybrid Micro-D or as a standalone contact... The standalone version provides optimal performance in one of the lowest form factors on the market. The Nano Coax contacts are designed to be terminated to a low-loss 29 AWG (.047") 50 coax cable. Cable-Cable: 20GHz / Edge Launch: 20GHz / Thru Hole: 10GHz

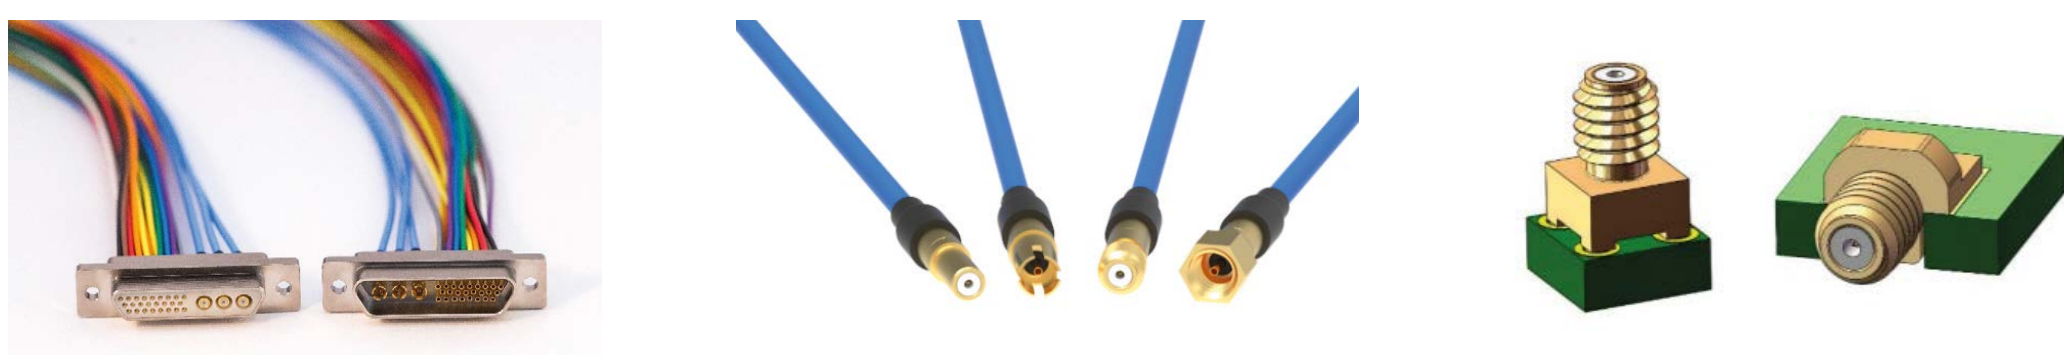

● **Micro 360® Circular Connectors**

Omnetics' Micro Circular Connector Series utilizes Omnetics' rugged and reliable Flex-Pin contact system, is spaced on 50 mil (1.27mm) centerlines, features a mated length of less than 12.4 mm, and is specified to MIL-DTL-83513.



Discrete Wired (WD)



Right Angle Thru-Hole (H1)



Right Angle Thru-Hole (R2)



Solder Cup (SS)



Straight Thru-Hole (S2)

● **IP68 Nano Circulars**

Omnetics' Micro Circular Connector Series utilizes Omnetics' rugged and reliable Flex-Pin contact system, is spaced on 50 mil (1.27mm) centerlines, features a mated length of less than 12.4 mm, and is specified to MIL-DTL-83513.



Full Keyed Breakaway (M)



Full Keyed Breakaway (F)



Ratcheting - RMCP



Ratcheting - RMCS

● **Micro Strip Connectors**



Single row: pin count changes up to 48  
Dual row: pin count changes up to 97 available with latch






● **Nano Strip Connectors**



2-60 positions for single row  
2-48 for dual row

● **Polarized Nano Connector (PZN)**

This configuration effectively polarizes the connector without the additional space required for guide pins. Termination options include: Pre-Wiring, Straight tail, Horizontal SMT, and Vertical SMT. Up to 24 positions.



● **Capabilities**

**LATCHING NANO-D**



**EMI SHIELDING**



**CUSTOM HARNESSING**



**CUSTOM METAL SHELL**








# IEH

[www.iehcorp.com](http://www.iehcorp.com)

## COMPANY OVERVIEW

Since 1941, IEH has been manufacturing superior products for demanding applications. Whether it's printed circuit board connectors, signal or power contacts, or custom interconnects, focus is delivering the right connector solution.


### ● Hyperboloid Technology

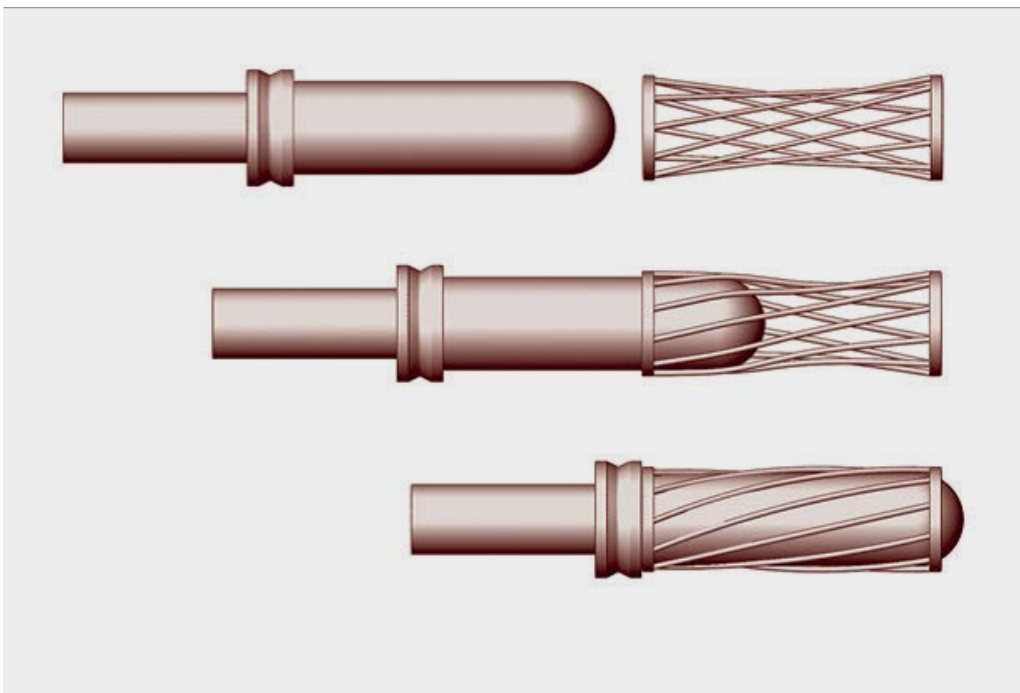


Utilized in all of our receptacle connectors, this unique design offers superior capability in every critical parameter of connector performance:

- ▶ Very low insertion force
- ▶ All but impervious to shock & vibration (Test exceed 300 g's without discontinuity.)
- ▶ 100,000 minimum duty cycles
- ▶ Extremely low contact resistance
- ▶ Improved current carrying capacity (The low contact resistance gives a lower °C rise from ambient under load. This feature often allows the user to operate the same size contact under higher load.)
- ▶ High reliability

## PCB CONNECTORS

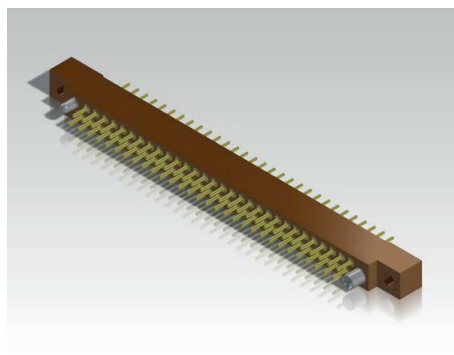


Type N Circulator from  
300MHz to 10 GHz

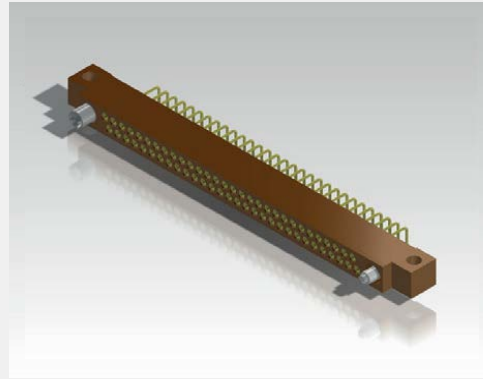

HRM Series - .075" centers  
2 & 3 row 10-206pos  
M55302 /190 /193




HMM Series - .075" centers  
4, 6 & 8 row 58-604pos

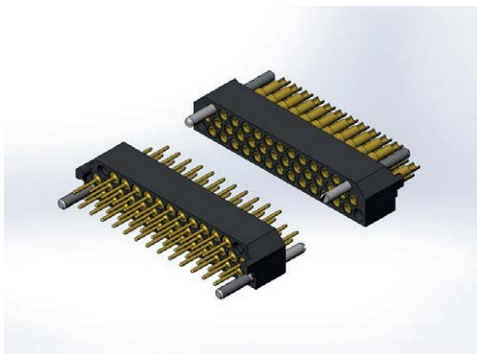

HGC/HGS Series  
Low-Profile for parallel boards  
22-90pos



HVM Series - .050" centers  
2-row  
10-100pos

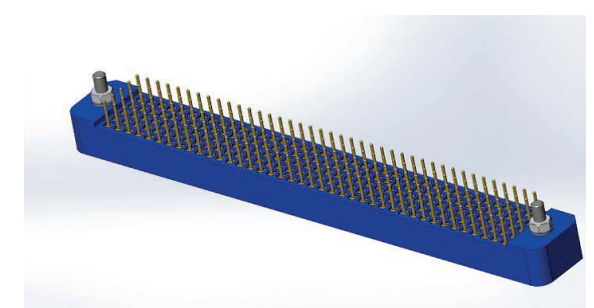

HMK Series - .100" centers,  
2, 3, 4 & 5 row  
17-490pos

## HYPERKINETIC® CONNECTORS - HIGH SPEED, HIGH DENSITY MODULAR




**HKC (cPCI Series)**

- ▶ Interchangeable with COTS board layout but with Hyperboloid Contact System
- ▶ 2mm Footprint of cPCI PICMG 2.0
- ▶ LCP Insulator Meets Outgassing Requirements
- ▶ Press-fit or Solder tail Terminations



**HKX (VPX-Compatible Series)**

- ▶ VITA-46 Platform
- ▶ Data Rates up to 10 Gbps
- ▶ 3U, 6U and Custom Configurations
- ▶ Custom Wafer Design for Mixing
- ▶ Differential and Single-ended Circuits
- ▶ Press-fit or Solder tail Terminations

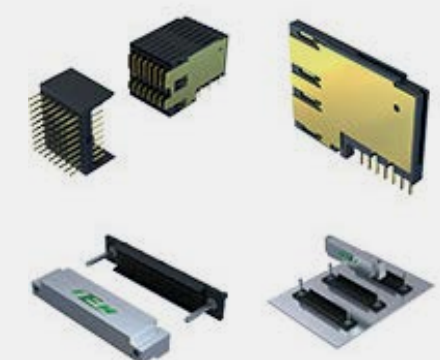



# MOVELLA

www.movella.com

## COMPANY OVERVIEW

Movella is the leading innovator in 3D motion tracking technology and products. Our sensor fusion technologies enable a seamless interaction between the physical and the digital world in consumer electronics devices and professional applications such as Motion Capture, Motion Analysis, healthcare, sports and industrial applications.



### MTI-600 SERIES



- Fully supported by the MT Software Suite (free use), enabling our customers a faster time to market
- Small footprint, flexible mounting options
- Industrial grade accuracy & reliability at affordable pricing, 100% calibrated and tested
- Rich interface platform, incl. CAN bus support
- External and internal GNSS-RTK receiver support
- Advanced proprietary XKF3 core sensor fusion algorithms
- State-Of-The-Art hardware components
- Extensive technical support
- RTK Solution
- ITAR-free

### MTI 100 SERIES



- Highest performance with resistance to magnetic distortions
- Vibration-rejecting gyroscopes and accelerometers
- Configurable output settings, synchronizes with any 3rd party device

### MTI-G-710




- All-in-one sensor system with high-frequency position and orientation output
- Excellent heading tracking without requiring a magnetic field
- Configurable output settings, synchronizes with any 3rd party device

	ROLL/PITCH STATIC	ROLL/PITCH DYNAMIC	YAW	SENSOR FUSION CORE	POSITION & VELOCITY
<b>MTi 1-series</b>					
MTi-1 IMU	-	-	-	-	-
MTi-2 VRU	0.5°	0.8°	AHS	XKF	-
MTi-3 AHRS	0.5°	0.8°	2.0°	XKF	-
MTi-7 GNSS/INS	0.5°	0.5°	1.5°	XKF	1m   0.05m/s
<b>MTi 600-series</b>					
MTi-610 IMU	-	-	-	-	-
MTi-620 VRU	0.2°	0.5°	AHS	XKF	-
MTi-630 AHRS	0.2°	0.5°	1.0°	XKF	-
MTi-670 GNSS/INS	0.2°	0.5°	1.0°	XKF	1m   0.05m/s
MTi-680G RTK-GNSS/INS	0.2°	0.5°	1.0°	XKF	0.05m / 0.05m/s
<b>MTi 10-series</b>					
MTi-30 AHRS	0.2°	0.5°	1.0°	XKF	-
<b>MTi 100-series</b>					
MTi-100 IMU	-	-	-	-	-
MTi-200 VRU	0.2°	0.3°	AHS	XEE	-
MTi-300 AHRS	0.2°	0.3°	1.0°	XEE	-
MTi-G-710 GNSS/INS	0.2°	0.3°	0.8°	XEE	1m   0.05m/s



## REAL-TIME SENSOR FUSED DATA

		IMU (1)	VRU (2)	AHRS (3)	GNSS/INS (7)	RTK-enabled GNSS / INS (8)	RTK-enabled VINS
		Intertial Measurement Unit	Vertical Reference Unit	Attitude and Heading Reference System	GNSS / GPS enabled Intertial Navigation System	Real Time Kinematics	Attitude and Heading Reference System
Gyroscope Accelerometer Magnetometer		Roll	Roll	Roll	Roll	Roll	Roll
Barometer GNSS Receiver		Pitch	Pitch	Pitch	Pitch	Pitch	Pitch
RTK Corrections Camera ( B&W ) & Wheel Odometry (External Source)		Unref. Yaw	Unref. Yaw	Unref. Yaw	Unref. Yaw	Unref. Yaw	Unref. Yaw
					3D Position	<small>cm-level</small> 3D Position	3D Position
					3D Velocity	3D Velocity	3D Velocity
					GNSS Time	GNSS Time	GNSS Time
						Long term dead-reckoning	

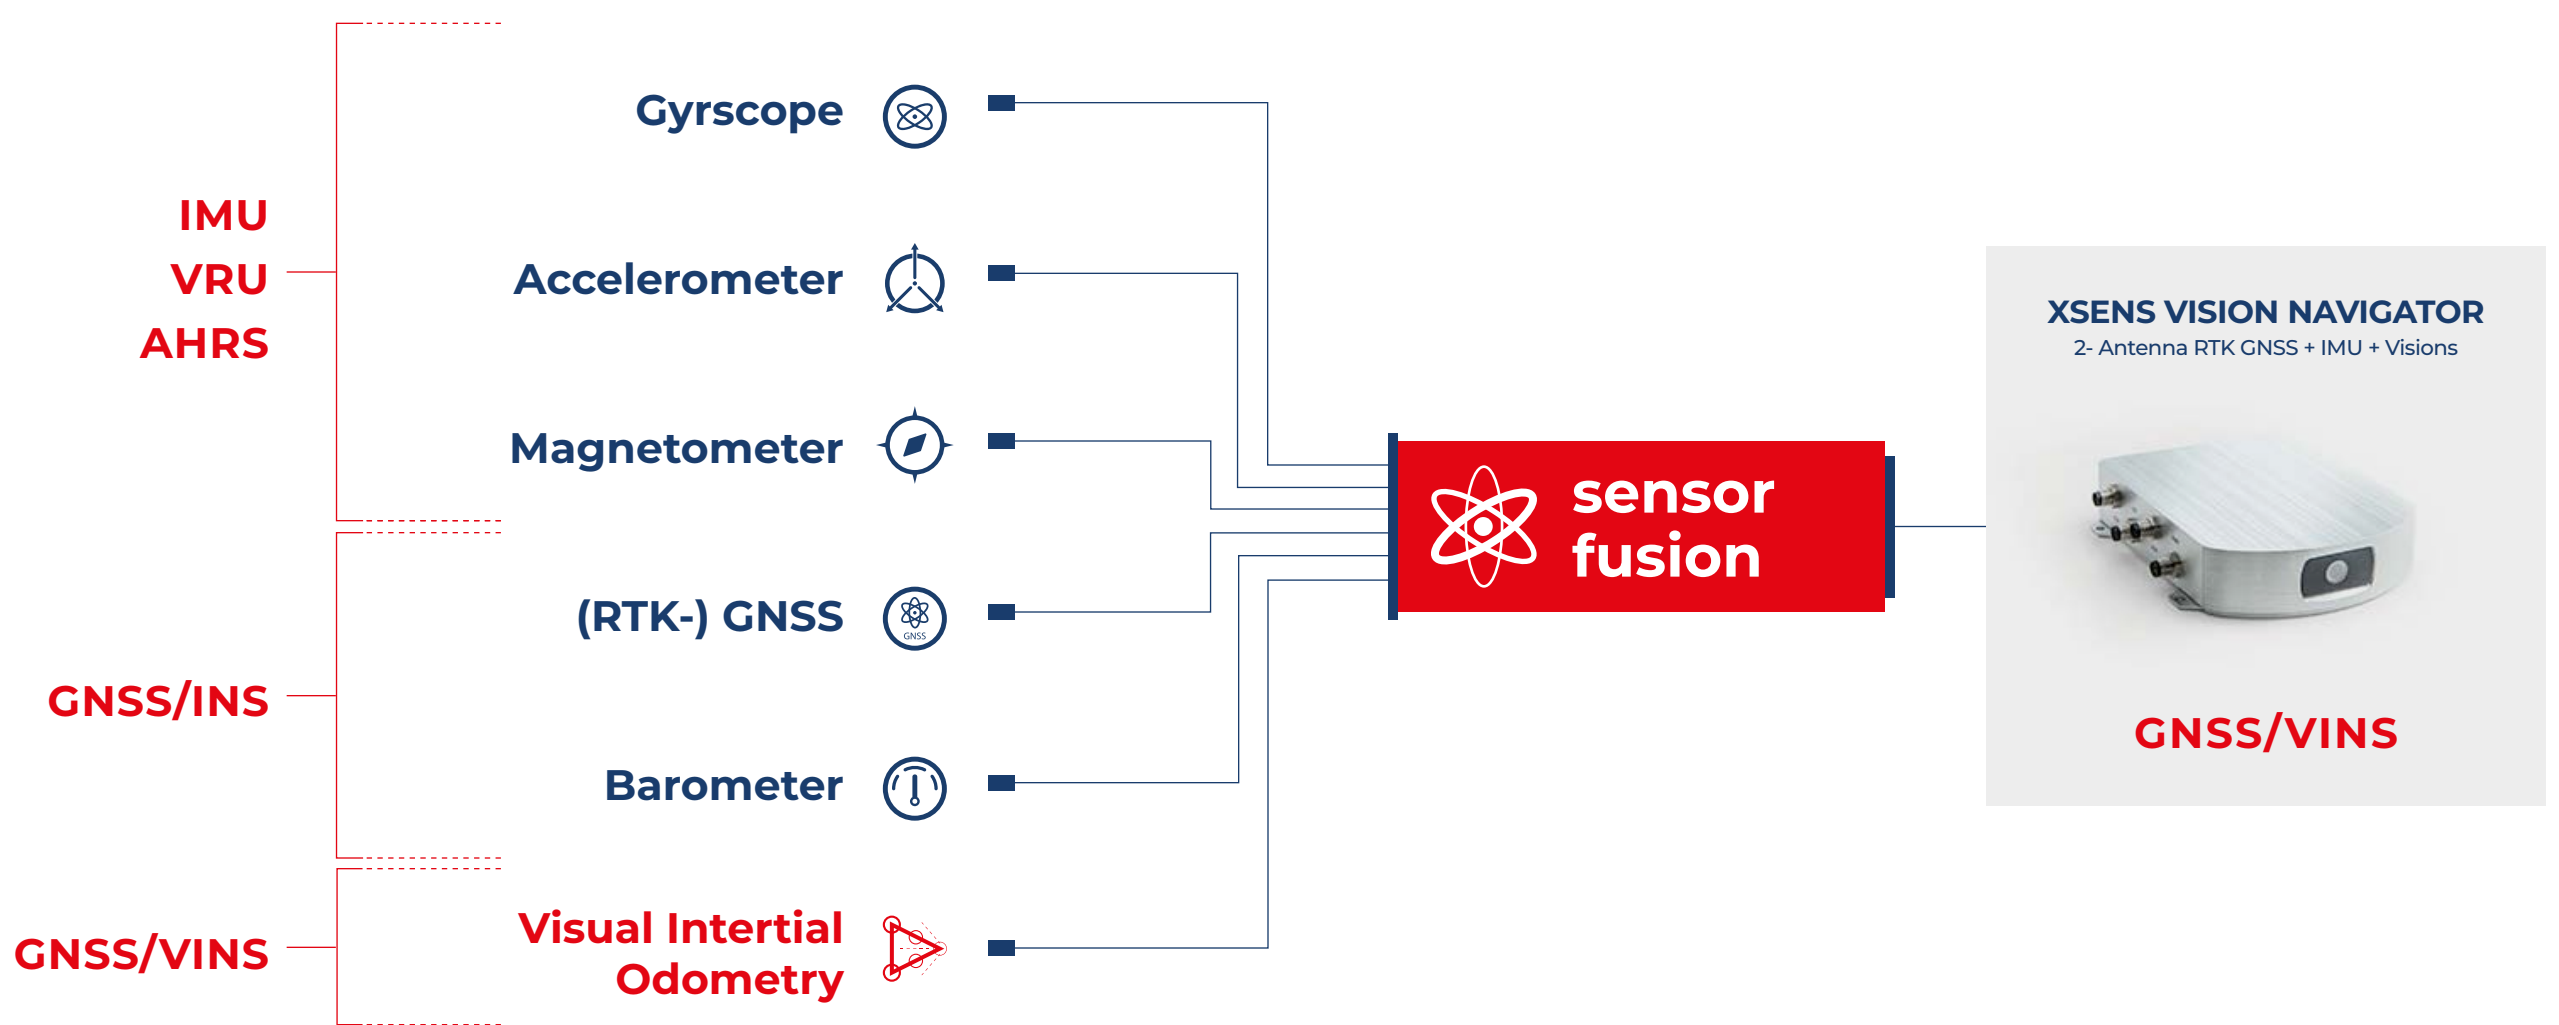

- **Accuracies, real-time operation, speed from 0 km/h up to 80 km/h:**

- ▶ Position: 1 cm + 1 ppm ( RTK fix)  
 Position error during GNSS outages:  
 2% of travelled distance  
 Reduced further to 0.75%, using wheel odometry input
- ▶ Orientation: 0.4\* (Roll/Pitch and Yaw/Heading)
- ▶ Velocity: 0.1 m/s

- **Output Rate up to 200 Hz**

- **“ lean & mean ” : No SLAM needed (optional available soon)**

- **Features:**

- ▶ SyncIn, SyncOut (GNSS 1 PPS), NTP time server
- ▶ ASCII (NMEA) messages
- ▶ ROS1/RPS2 driver
- ▶ Available soon (2023)  
 Post-processing  
 PointPerfect - advanced GNSS augmentation data service



# POLYEXPLORE

[www.polyexplore.com](http://www.polyexplore.com)

## COMPANY OVERVIEW

About EMC/EMI shielding solutions EMCEMI Staff have between them, over 50 years' experience in the manufacturing processes involved in making high quality & reliable EMC & RFI components, while specialising in the manufacture and supply of a wide range of products which are manufactured at our brand new factory in Essex in the United Kingdom. We manufacture components to MIL83528C specification.

### MEMS RTK GNSS/INS POLYNAV 2000H/P



**High accuracy position, velocity, acceleration, attitude, heading, angular rate and heave**

- ▶ GPS, GLONASS, Beidou, Galileo and SBAS
- ▶ Dual frequency (L1 & L2) RTK
- ▶ Dual antenna for accurate heading
- ▶ Best in class price-performance ratio
- ▶ 100 Hz navigation solution and the raw measurement output
- ▶ Accurate attitude/heading whether the platform is static or moving
- ▶ Tactical grade IMU sensors
- ▶ Multiple sensor fusion
- ▶ ROS driver ready
- ▶ Heave message

### FOG INERTIAL NAVIGATION SYSTEM POLYNAV 2000F



**High accuracy position, velocity, acceleration, attitude, heading, angular rate and heave**

- ▶ GPS, GLONASS, Beidou, Galileo and SBAS
- ▶ Dual frequency (L1 & L2) RTK
- ▶ Dual Antenna for accurate heading
- ▶ Best in class price-performance ratio
- ▶ 100 Hz navigation solution and the raw measurement output
- ▶ Accurate attitude/heading whether the platform is static or moving
- ▶ Fiber Optic Gyroscope (FOG)
- ▶ Multiple sensor fusion
- ▶ ROS driver ready
- ▶ Heave message

### "ULTRA" GNSS/INS POLYNAV 2000S



**Centimeter level positioning with precise attitude and heading whether the platform is static or moving**

- ▶ Precision velocity, acceleration, attitude (Roll, pitch, heading), and angular rate
- ▶ GPS, GLONASS, Beidou, Galileo\*, and SBAS, QZSS; 240 Tracking Channels
- ▶ Dual frequency (L1 & L2) RTK
- ▶ Global PPP
- ▶ Dual antenna for accurate heading
- ▶ Best in class price-performance ratio
- ▶ 100 Hz navigation solution and the raw measurement output
- ▶ Tactical grade, near FOG performing solid-state IMU sensor
- ▶ Multiple sensor fusion
- ▶ ROS driver ready
- ▶ Heave message
- ▶ IP67 environmental rating

### RTK GNSS/INS POLYNAV 2000P OEM



**High accuracy position, velocity, acceleration, attitude (Roll, pitch, heading), angular rate**

- ▶ GPS, GLONASS, Beidou, Galileo and SBAS
- ▶ Dual frequency (L1 & L2) RTK
- ▶ Dual antenna for accurate heading
- ▶ Best in class in size and price-performance ratio
- ▶ 100 Hz navigation solution and the raw measurement output
- ▶ Accurate attitude/heading whether the platform is static or moving
- ▶ Tactical grade IMU sensors
- ▶ Multiple sensor fusion
- ▶ ROS driver ready
- ▶ Heave message



	POLYNAV 2000S	POLYNAV 2000P OEM	POLYNAV 2000P	POLYNAV 2000H	POLYNAV 2000F	POLYNAV 2000F1
<b>GNSS</b>						
<b>Constellation</b>	GPS/GLONASS/ BeiDou/Galileo/ SBASS/QZSS	GPS/GLONASS/ BeiDou/Galileo	GPS/GLONASS/ BeiDou/Galileo	GPS/GLONASS/ BeiDou/Galileo	GPS/GLONASS/ BeiDou/Galileo	GPS/GLONASS/ BeiDou/Galileo
<b>Satellite signals</b>	L1 & L2C/L2P (GPS), E1&E5b (Galileo)	L1 & L2	L1 & L2	L1 & L2	L1 & L2	L1 & L2
<b>Position accuracy (RTK)</b>	1.6 m CEP SPS 0.02 m RTK	1.6 m CEP SPS 0.02 m RTK	1.6 m CEP SPS, 0.02 m RTK	1.6 m CEP SPS 0.02 m RTK	1.6 m CEP SPS 0.02 m RTK	1.6 m CEP SPS 0.02 m RTK
<b>Velocity Accuracy (RTK)</b>	1 cm/s	1 cm/s	1 cm/s	1 cm/s	1 cm/s	1 cm/s
<b>Roll/Pitch</b>	0.015°	0.05°	0.005° (H), 0.01°(P)	0.005° (H), 0.01°(P)	0.05°	0.05°
<b>Heading</b>	0.08° (1 m base)	0.1°	0.1° (1 m base)	0.1° (1 m base)	0.01° (5 m base) 0.08° per 1 meter of baseline length	0.01° (5 m base) 0.08° per 1 meter of baseline length
<b>Measurement rate</b>	100 Hz	100 Hz (up to 400Hz)	100 Hz	100 Hz	100 Hz	100 Hz
<b>Sensitivity</b>	-160 dBm	-160dBm	-160 dBm	-160 dBm	-160 dBm	-160 dBm
<b>Number of antennas</b>	2	2	2	2	2	2
<b>Inputs/comm</b>	Ethernet, UART, RS232, CAN, DMI, PPS, Event Input		Ethernet, CAN, 2 Serial Ports, Odometer	Ethernet, CAN, 2 Serial Ports, Odometer	Ethernet, CAN, 2 Serial Ports, Odometer	Ethernet, CAN, 2 Serial Ports, Odometer
<b>TIME TO FIRST FIX (TTFF)</b>						
<b>Cold start</b>	< 60 s	< 60 s	< 60 s	< 60 s	< 60 s	< 60 s
<b>Warm Start</b>	< 45 s	< 45 s	< 45 s	< 45 s	< 45 s	< 45 s
<b>Hot Start</b>	< 11 s	< 11 s	< 11 s	< 11 s	< 11 s	< 11 s
<b>Re-acquisition</b>	< 2 s	< 2 s	< 2 s	< 2 s	< 2 s	< 2 s
<b>INERTIAL SENSORS</b>						
<b>Gyro Dynamic Range</b>	400°/s	±125°/s	±125°/s	125 °/s	490°/s	490°/s
<b>Gyro Bias Instability</b>	0.3 °/h	2°/h	2°/h	0.8 °/hr	0.1 °/h	0.05 °/h
<b>Gyro Random Walk</b>	0.015°/√h	0.15°/√h	0.15°/√h	0.09°/√hr	0.017°/√h	0.012°/√h
<b>Accelerometer Dynamic Range</b>	10g	±8g	±8g	8 g	10g	10g
<b>Accelerometer Bias Instability</b>	0.03 ug	3.6ug	3.6ug	3.2 ug	0.1mg	0.01mg
<b>Accelerometer Random Walk</b>	0.015 m/s/√h	0.012m/s/√h	0.012m/s/√h	0.008 m/s/√hr	0.07m/s/√h	0.014m/s/√h
<b>MECHANICAL</b>						
<b>Dimension</b>	166 x 134 x 70 mm	80 x 60 x 22 mm	147 x 99 x 48 mm	147 x 99 x 48 mm	177 x 115 x 109 mm	177 x 115 x 109 mm
<b>Weight</b>	approx. 800 g.	13 g	500 g	500 g	1455 g (without antennas)	1455 g (without antennas)
<b>ENVIRONMENTAL</b>						
<b>Operating temperature</b>	-40° to 85° C	-40° to 85° C	-40° to 85° C	-40° to 85° C	-40° to 65° C	-40° to 65° C
<b>Shock</b>					Operating, 9 g, 11 msec, sawtooth	Operating, 9 g, 11 msec, sawtooth
<b>Vibration</b>					Operating 8 g rms, 20-2000 Hz random	Operating 8 g rms, 20-2000 Hz random
<b>ELECTRICAL</b>						
<b>Input voltage</b>	12-24 V DC	12-24 V DC	12-24 V DC	12-24 V DC	12-28 V DC	12-28 V DC
<b>Power</b>	10W	5W	5W	5W	10 W	10 W



	POLYNAV 2000S	POLYNAV 2000P OEM	POLYNAV 2000P	POLYNAV 2000H	POLYNAV 2000F	POLYNAV 2000F1
<b>GNSS</b>						
<b>Constellation</b>	GPS/GLONASS/ BeiDou/Galileo/ SBASS/QZSS	GPS/GLONASS/ BeiDou/Galileo	GPS/GLONASS/ BeiDou/Galileo	GPS/GLONASS/ BeiDou/Galileo	GPS/GLONASS/ BeiDou/Galileo	GPS/GLONASS/ BeiDou/Galileo
<b>Satellite signals</b>	L1 & L2C/L2P (GPS), E1&E5b (Galileo)	L1 & L2	L1 & L2	L1 & L2	L1 & L2	L1 & L2
<b>Position accuracy (RTK)</b>	1.6 m CEP SPS 0.02 m RTK	1.6 m CEP SPS 0.02 m RTK	1.6 m CEP SPS, 0.02 m RTK	1.6 m CEP SPS 0.02 m RTK	1.6 m CEP SPS 0.02 m RTK	1.6 m CEP SPS 0.02 m RTK
<b>Velocity Accuracy (RTK)</b>	1 cm/s	1 cm/s	1 cm/s	1 cm/s	1 cm/s	1 cm/s
<b>Roll/Pitch</b>	0.015°	0.05°	0.005° (H), 0.01°(P)	0.005° (H), 0.01°(P)	0.05°	0.05°
<b>Heading</b>	0.08° (1 m base)	0.1°	0.1° (1 m base)	0.1° (1 m base)	0.01° (5 m base) 0.08° per 1 meter of baseline length	0.01° (5 m base) 0.08° per 1 meter of baseline length
<b>Measurement rate</b>	100 Hz	100 Hz (up to 400Hz)	100 Hz	100 Hz	100 Hz	100 Hz
<b>Sensitivity</b>	-160 dBm	-160dBm	-160 dBm	-160 dBm	-160 dBm	-160 dBm
<b>Number of antennas</b>	2	2	2	2	2	2
<b>Inputs/comm</b>	Ethernet, UART, RS232, CAN, DMI, PPS, Event Input		Ethernet, CAN, 2 Serial Ports, Odometer	Ethernet, CAN, 2 Serial Ports, Odometer	Ethernet, CAN, 2 Serial Ports, Odometer	Ethernet, CAN, 2 Serial Ports, Odometer
<b>TIME TO FIRST FIX (TTFF)</b>						
<b>Cold start</b>	< 60 s	< 60 s	< 60 s	< 60 s	< 60 s	< 60 s
<b>Warm Start</b>	< 45 s	< 45 s	< 45 s	< 45 s	< 45 s	< 45 s
<b>Hot Start</b>	< 11 s	< 11 s	< 11 s	< 11 s	< 11 s	< 11 s
<b>Re-acquisition</b>	< 2 s	< 2 s	< 2 s	< 2 s	< 2 s	< 2 s
<b>INERTIAL SENSORS</b>						
<b>Gyro Dynamic Range</b>	400°/s	±125°/s	±125°/s	125 °/s	490°/s	490°/s
<b>Gyro Bias Instability</b>	0.3 °/h	2°/h	2°/h	0.8 °/hr	0.1 °/h	0.05 °/h
<b>Gyro Random Walk</b>	0.015°/√h	0.15°/√h	0.15°/√h	0.09°/√hr	0.017°/√h	0.012°/√h
<b>Accelerometer Dynamic Range</b>	10g	±8g	±8g	8 g	10g	10g
<b>Accelerometer Bias Instability</b>	0.03 ug	3.6ug	3.6ug	3.2 ug	0.1mg	0.01mg
<b>Accelerometer Random Walk</b>	0.015 m/s/√h	0.012m/s/√h	0.012m/s/√h	0.008 m/s/√hr	0.07m/s/√h	0.014m/s/√h
<b>MECHANICAL</b>						
<b>Dimension</b>	166 x 134 x 70 mm	80 x 60 x 22 mm	147 x 99 x 48 mm	147 x 99 x 48 mm	177 x 115 x 109 mm	177 x 115 x 109 mm
<b>Weight</b>	approx. 800 g.	13 g	500 g	500 g	1455 g (without antennas)	1455 g (without antennas)
<b>ENVIRONMENTAL</b>						
<b>Operating temperature</b>	-40° to 85° C	-40° to 85° C	-40° to 85° C	-40° to 85° C	-40° to 65° C	-40° to 65° C
<b>Shock</b>					Operating, 9 g, 11 msec, sawtooth	Operating, 9 g, 11 msec, sawtooth
<b>Vibration</b>					Operating 8 g rms, 20-2000 Hz random	Operating 8 g rms, 20-2000 Hz random
<b>ELECTRICAL</b>						
<b>Input voltage</b>	12-24 V DC	12-24 V DC	12-24 V DC	12-24 V DC	12-28 V DC	12-28 V DC
<b>Power</b>	10W	5W	5W	5W	10 W	10 W



## COMPANY OVERVIEW

ADVANCED Motion Controls has earned a reputation for being the most flexible and affordable manufacturer of quality high performance and high power density servo drives. By selecting ADVANCED Motion Controls as your servo drive and controls supplier, you will be adding an integral member to your design engineering team with multi-industry expertise. 30+ years of servo drive manufacturing, with nearly 3 million servo axes built and shipped worldwide!



### ANY NETWORK



We also have the ability to quickly produce custom DigiFlex® Performance™ drives utilizing many other common types of network communication.

### ANY MOTOR

#### Three Phase (Brushless)

- ▶ Servo – BLDC, PMAC
- ▶ AC Induction (Closed loop vector)
- ▶ Closed loop stepper

#### Single Phase

- ▶ Brushed
- ▶ Voice coil
- ▶ Inductive load

### ANY FEEDBACK

#### ABSOLUTE ENCODER

- ▶ EnDAT®
- ▶ Hiperface®
- ▶ BiSS®C – Mode

#### Tachometer

- ▶ ±10 Vdc
- ▶ ±60 Vdc

#### 1 VP – P SIN/COS ENCODER

#### Aux. Incremental Encoder

#### INCREMENTAL ENCODER

#### Resolver

±10 Vdc position

#### Hall Sensors

### ANY CONTROLLER

#### Digital or analog controllers

- ▶ ±10 Vdc
- ▶ PWM and Direction
- ▶ Step and Direction

#### Digital or analog controllers

- ▶ 0 – 5 V (Standard, Inverted or Wigwag)
- ▶ 0 – 5 kW (Standard, Inverted or Wigwag)

### ANY ENVIRONMENT

#### Extreme Ambient Temperatures

- ▶ Standard products range from -40°C to +85°C
- ▶ Custom products operate down to -50°C and lower, and +100°C and higher!


#### Component Temperature Protection

- ▶ Ø PCB operating temperatures up to 105°C

• **ADVANCED Motion Controls Advantages:**


- Battery supplied, mobile operation needing 8+ hours duty / 7-day standby capability
- ≥98% efficiency to extend overall battery life
- Multiple power demands
- Common control system dictated same servo drive interface but with models having different power levels
- Minimal maintenance
- Operation typically in remote locations
- Long service life expected

• **DigiFlex® Performance™ Servo Drives**

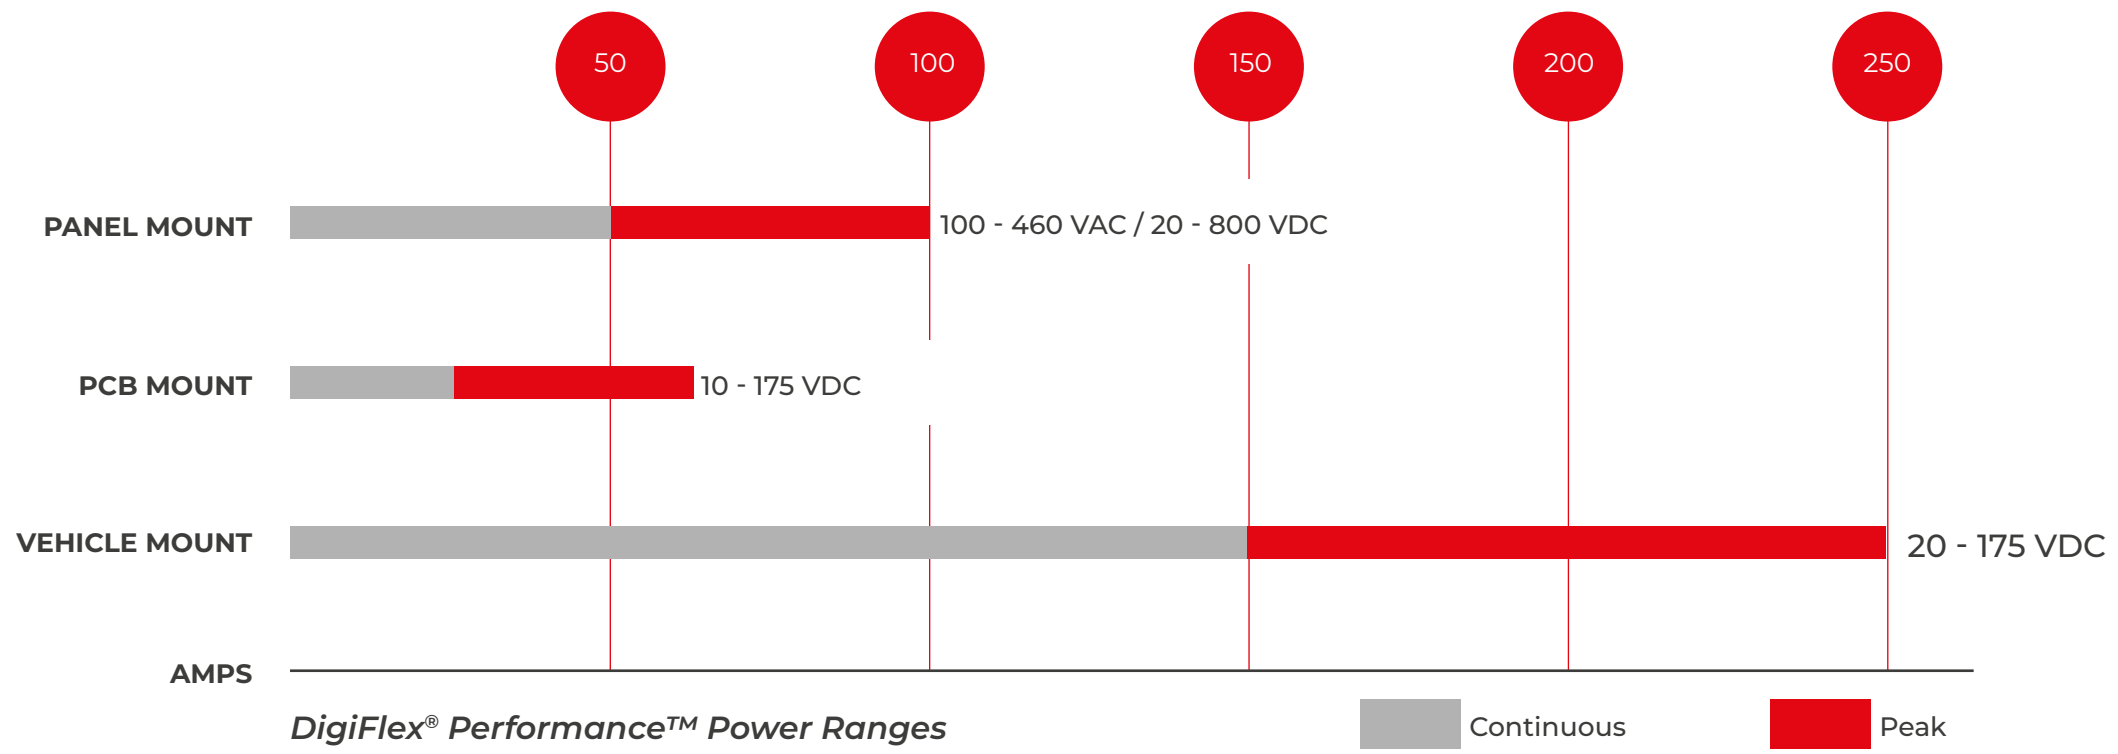

- Peak power output up to 27.4kW
- Three phase brushless (servo, closed loop vector, closed loop stepper)
- Single phase (brushed, voice coil, inductive load) motors
- Variety of feedback options - Absolute Encoder (EnDat®, Hiperface®, BiSS® C-Mode), Incremental Encoder, Hall Sensors, Resolver, 1Vp-p Sin/Cos Encoder, Tachometer
- Compatible with DriveLibrary™ - ADVANCED Motion Controls' API for C++ motion programming

• **AxCent™ Servo Drives**

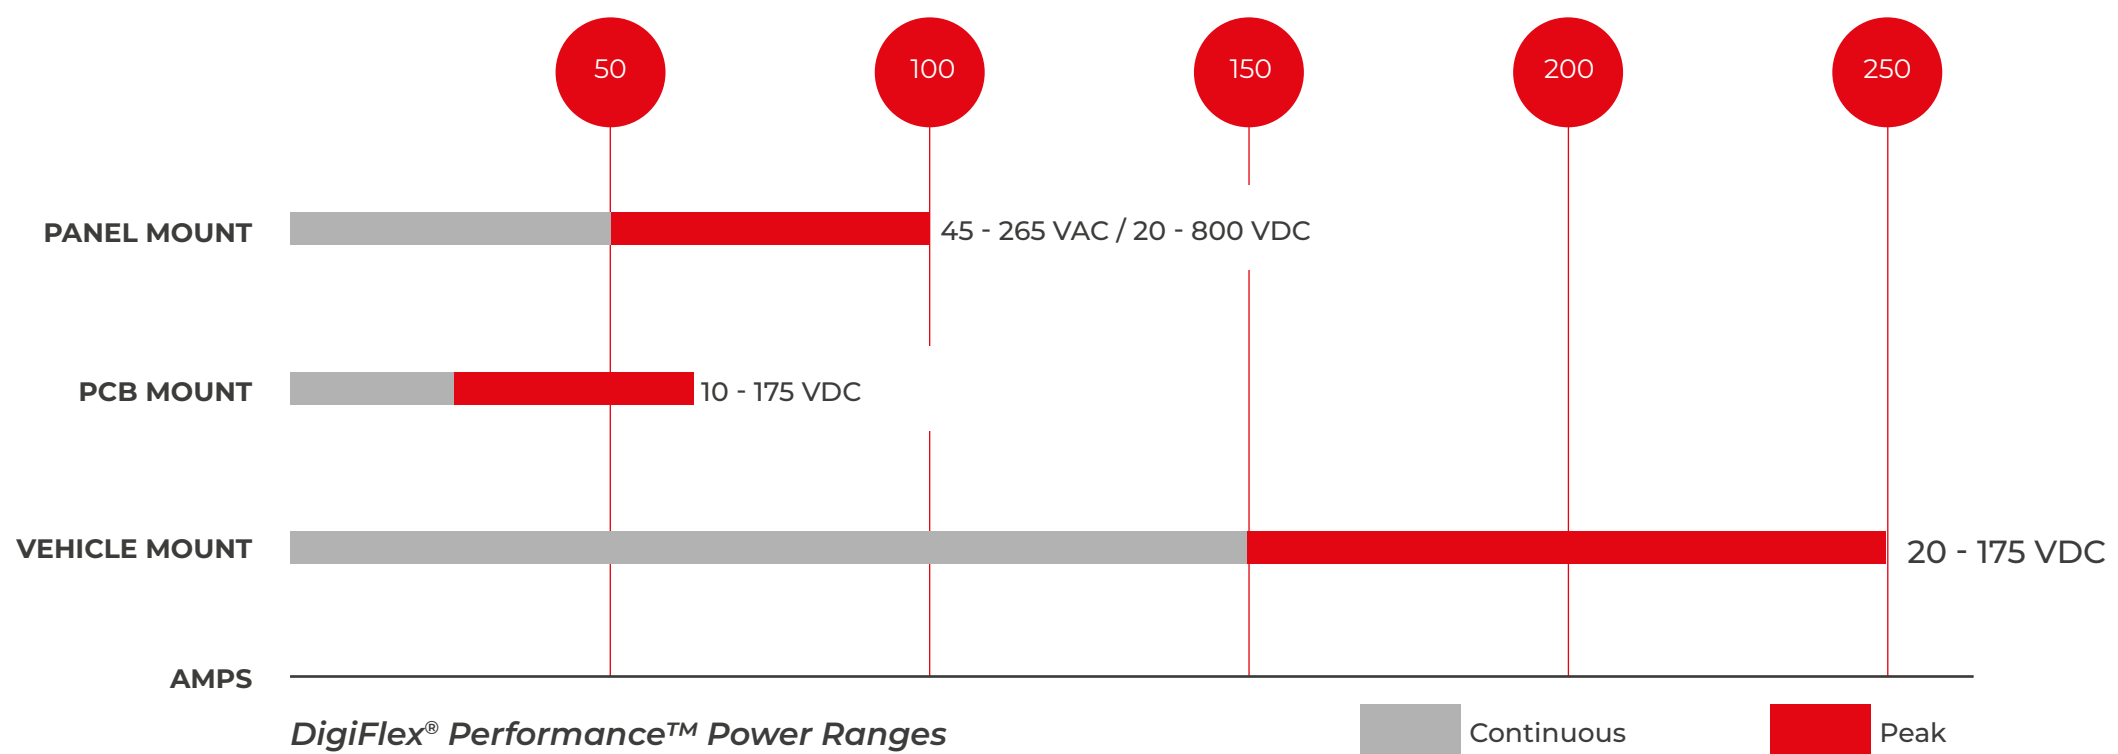

- Unparalleled benefits in both simplicity and performance,
- NOT require computer hardware or software,
- Higher bandwidth and faster response times at a lower cost,
- Including ±10V analog, PWM and Direction, and specialized electric vehicle commands,
- Optical isolation between high and low power signals standard on certain models
- Current, Velocity, and Fault Monitor analog output signals

• **Extended Environment products (AZX – DZX Series)**

ADVANCED Motion Controls' Extended Environment products are designed to operate under harsh thermal and mechanical extremes.

- Ambient operating temperatures from -40°C to 85°C
- Over Temperature up to 105°C
- Thermal rise cycling in about 2 minutes
- Shock up to 15g's at 11ms
- Vibration up to 30grms on all 3 axes
- Designed to assist system compliance toward: MIL-STD-810F: temperature, thermal shock, humidity, altitude, shock & vibration





## COMPANY OVERVIEW

ICPE or Institutul de Cercetări Electrotehnice® was established over 65 years ago. The modern research infrastructure, obtained successfully following the performance of local and international projects, is a solid basis for further research in electrical engineering, and related fields.

### DC BRUSHED TORQUE MOTORS

DC Torque Motors operate on the same principles as the conventional DC motors but the magnetic circuit design and consequent mechanical configuration are designed for maximum torque output rather than the usual low torque / high speed characteristic. Arrange of unhused units which are supplied as three separate components, a permanent magnet field assembly, a wound armature with precision bore for mounting and a brush ring assembly or brush segments.

Fixed element – the stator, is equipped with rare earth permanent magnets and the rotor is equipped with a dc specific winding which is connected to an extra flat commutator – brushed system. Low speed Torque Motors are beneficial for direct-drive applications. Position and velocity feedback can be achieved via additions of DC Tachos, Resolvers or Optical Encoders. The unhused motors described below can be offered in custom designed housings for specific applications.



PRODUCT CODE	PEAK TORQUE [mNm]	TORQUE SENSITIVITY [mNm/A]	MOTOR CONSTANT [mNm/W]	OUTSIDE DIAMETER [mm]	HEIGHT [mm]
TQRB-15-0.39	77.7	25,1	10,3	38,10	9,78
TQRB-15-0.51	127	36,3	13,9	38,10	12,95
TQRB-15-0.51-B	141	32,4	16	38,10	12,95
TQRB-15-1.03	333	83,2	39,2	38,10	26,00
TQRB-15-1.1	353	50,4	28,3	38,10	27,94
TQRB-20-1.14	1200	150	86,6	51,00	29,00
TQRB-24-1-C	600	195	68,2	60,32	25,40
TQRB-30-0.78	777	256	87,4	76,20	19,80
TQRB-34-0.51	883	160	74,1	85,725	12,95
TQRB-34-0.95-A	2048	438	195	85,725	24,40
TQRB-34-1.46	3140	551	271	85,725	36,90
TQRB-37-0.54	1060	210	85,4	92,075	13,72
TQRB-37-0.54-B	1060	158	85,4	92,075	13,72
TQRB-37-0.84	2120	358	156	92,075	21,33
TQRB-37-1.46	4000	681	341	92,456	37,008
TQRB-45-0.56	2300	340	146	114,3	14,22
TQRB-45-0.69-B	3250	542	238	114,3	17,45
TQRB-45-0.69-C	3250	963	238	114,3	17,45
TQRB-45-0.86	4590	715	277	114,3	21,84
TQRB-45-1.08	6510	838	401	114,3	27,28
TQRB-51-0.58	2825	251	180	130,175	14,73
TQRB-51-0.93	2800	1400	422	130,175	23,9
TQRB-51-1.0	4800	1200	490	130,175	25,5
TQRB-51-2.1	10000	1515	716	130,175	53,34

### D.C. LIMITED ANGLE BRUSHLESS TORQUE MOTORS

Limited Angle Torque Motors are ideal for compact, limited angular excursion, rotary, closed loop servo applications. Operating in the system, these units endure a long storage life and a harsh thermal and mechanical environment. All motors consist of a housed stator with a high density winding around a steel core, molded in a special resin. The rotor is build from high-grade samarium cobalt magnets or neodymium, on a stainless steel core.

#### Advantages

- No Torque Ripple
- High Angular Acceleration
- No Commutation
- Brushless
- Low Profile



## AC SERVO MOTORS – BSM SERIES

BSM Series motors are available with high energy Nd-Fe-B magnets - 6 (six) magnetic poles - F Class Insulation - standard feedback system with resolver - winding protection with PTC - Standard protective structure is IP55 class - torque range from 0.1 to 20 Nm - high torque to weight ratios - superior low speed performance - very low inertia.

In this motor range below options are also available:

- Shaft with keyway according to DIN 6885
- Fail safe brake 24 VDC,
- Shaft seal ring,
- Additional feedback systems (encoder),
- Protection class IP65,
- Custom windings,
- Special dimensions and configurations.



## SINUSOIDAL OUTPUT TRANSDUCERS – RESOLVERS

Resolvers which are directly supplied on the rotor winding, used on either limited angle, case in which they are supplied by means of flexible cables or on 360 degrees and, in this case, they are supplied through some collecting rings, as well as resolvers supplied by means of rotary transformer with a constant transformation ratio and the input and output winding terminals on the stator.

### Advantages

- Used as an absolute angle transducer,
- Resistance to mechanical stresses,
- Operation within a wide temperature range.



## OUTER ROTOR BRUSHLESS MOTOR

PARAMETER	SYMBOL	UNITS	VALUE
Nominal Torque	$M_n$	Nm	9
Peak Torque	$M_{max}$	Nm	27
Motor Constant	$K_M$	N/W	1,4
Voltage	$V_{DC}$	V	600
Nominal Current	$I_n$	A	8,3
Torque Constant	$K_T$	Nm/A <sub>ms</sub>	1,08
Back EMF Constant	$K_E$	V <sub>ms</sub> /krpm	67
No-Load Speed		rpm	7000
Number of Poles	$N_p$		10
Phase Connection			Y
Line-to-Line Resistance	$R_L$	$\Omega$	0,4
Line-to-Line Inductance	$L_L$	mH	5,3
Electric Time Constant	$T_E$	ms	13,2
Insulation Class			H
Thermal Resistance	$T_R$	$^{\circ}C/W$	1,7
External Diameter	OD	mm	170
Stator/Rotor Length	L	mm	28
Motor Length	TL	mm	55
Inertia	J	kg cm <sup>2</sup>	105
Weight	Wt	kg	4,2

The stator is a laminated steel core with a three phase windings. The high energy permanent magnets outer rotor configuration provides a more rigid structure for the permanent magnets and has higher inertia.

### Advantages

- High torque due to large air gap radius,
- Stable low speed performance without feedback,
- Lower audible noise with reduced cogging.

### Other Product Groups

As the company is established to customize different electrical machines there are many different products that ICPE can offer as following:

- Flat brushless servo motors,
- Precision small brushless motors,
- AC servo motors,
- Linear motors,
- Electric generators,
- 2-D robot tables.





# NETZER

[www.netzerprecision.com](http://www.netzerprecision.com)



## COMPANY OVERVIEW

Electric Encoder™ Netzer’s world-wide patented, rugged high performance Electric Encoder™ technology, suits a wide variety of applications ranging from space and avionics, through military and defense, to instrumentation and automotive. The product portfolio includes Rotary & Linear absolute or incremental position encoders, with analog or digital outputs.


The Non-contact, absolute-position relies on interaction between the measured displacement and an internally shielded, space/time modulated, electric field and offers features unsurpassed by traditional optical and magnetic encoders.

### Advantages of Electrical Encoders

- Simple, robust structure with a virtually no-failure-mechanism,
- Very low weight, inertia, and profile ( $\approx <10\text{mm}$ ),
- Ring shaped, hollow shaft with a wide range of diameters,
- Precision to  $0.001^\circ$  in selected models,
- Default operation range from  $-55^\circ\text{C}$  to  $+125^\circ\text{C}$ ,
- Insensitivity to EMI/RFI and magnetic fields,
- Ultra-high-speed options,
- Wide variety of position feedback protocols.
- The company has structured its product range based

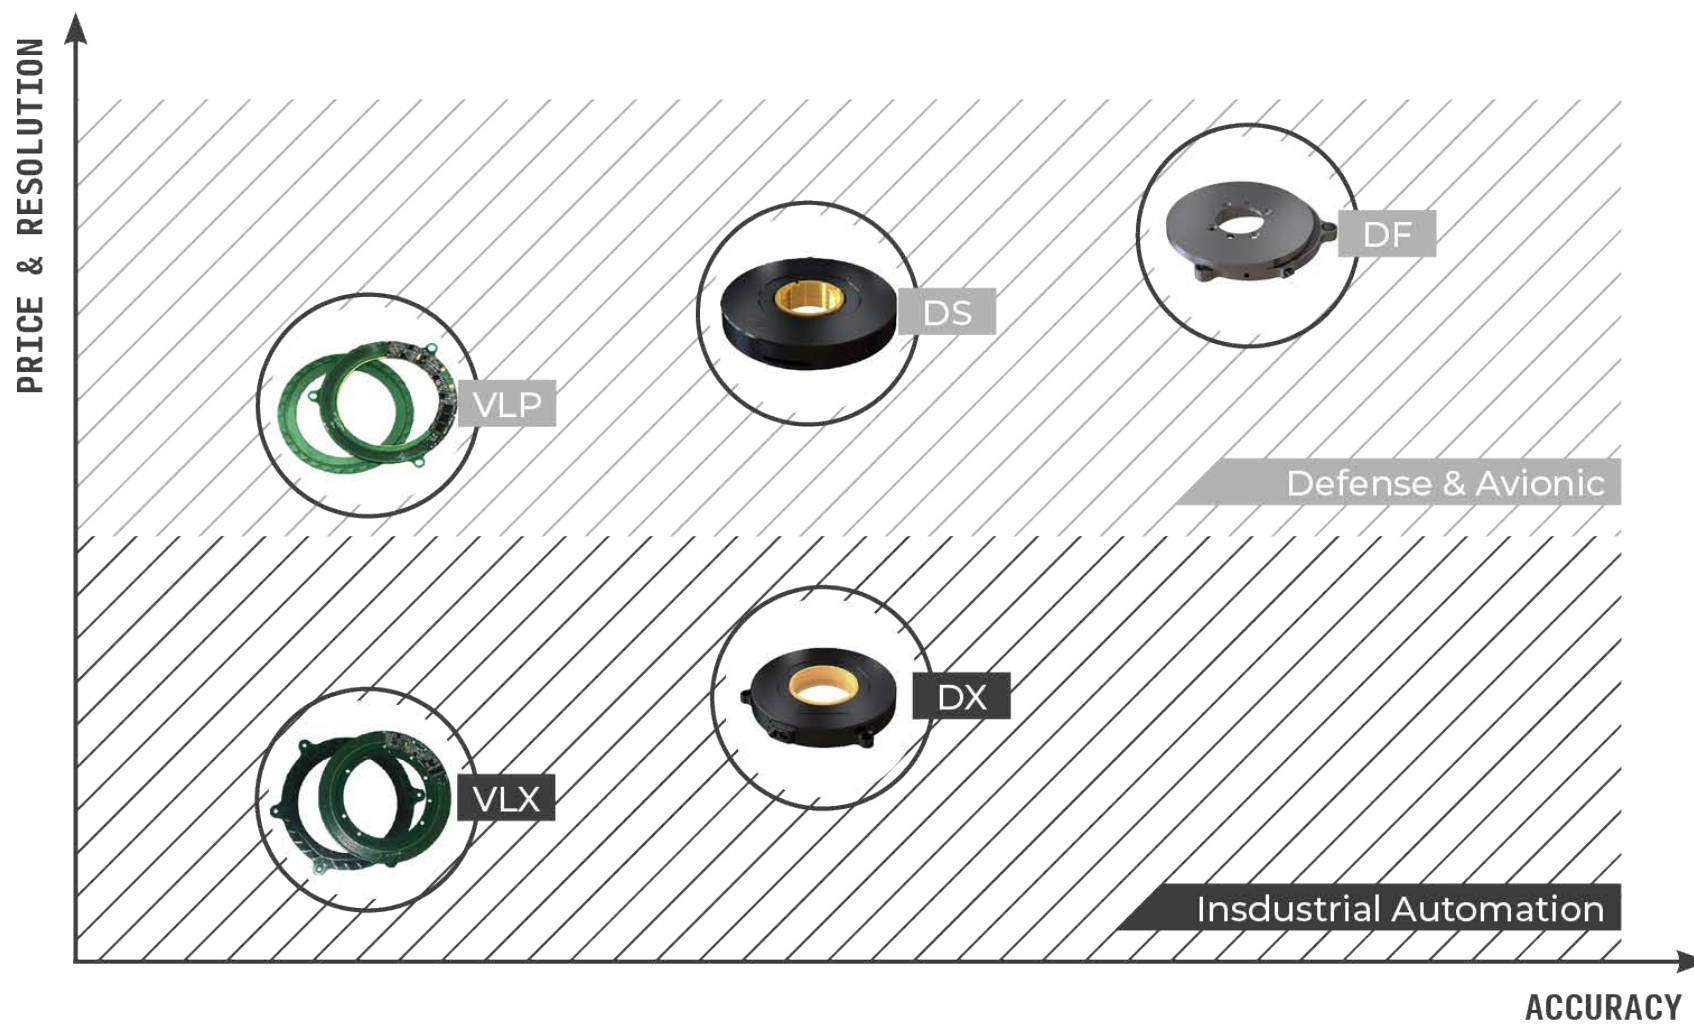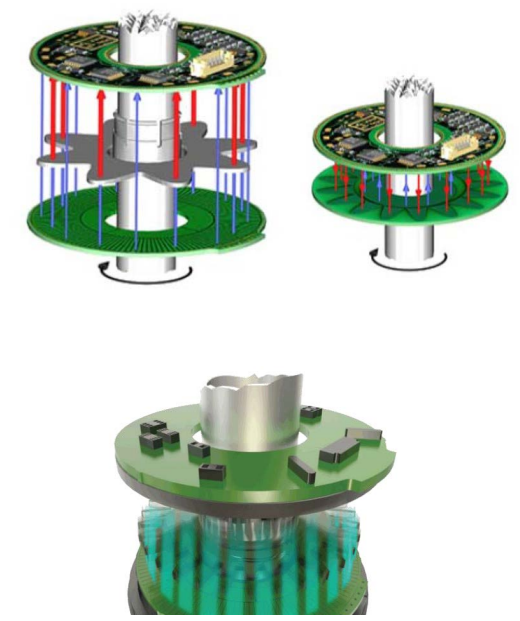

The company has structured its product range based on price performance criteria for different types of applications. For industrial applications DX and VLX products; for defense and avionic applications VLP, DS and DF products are available.

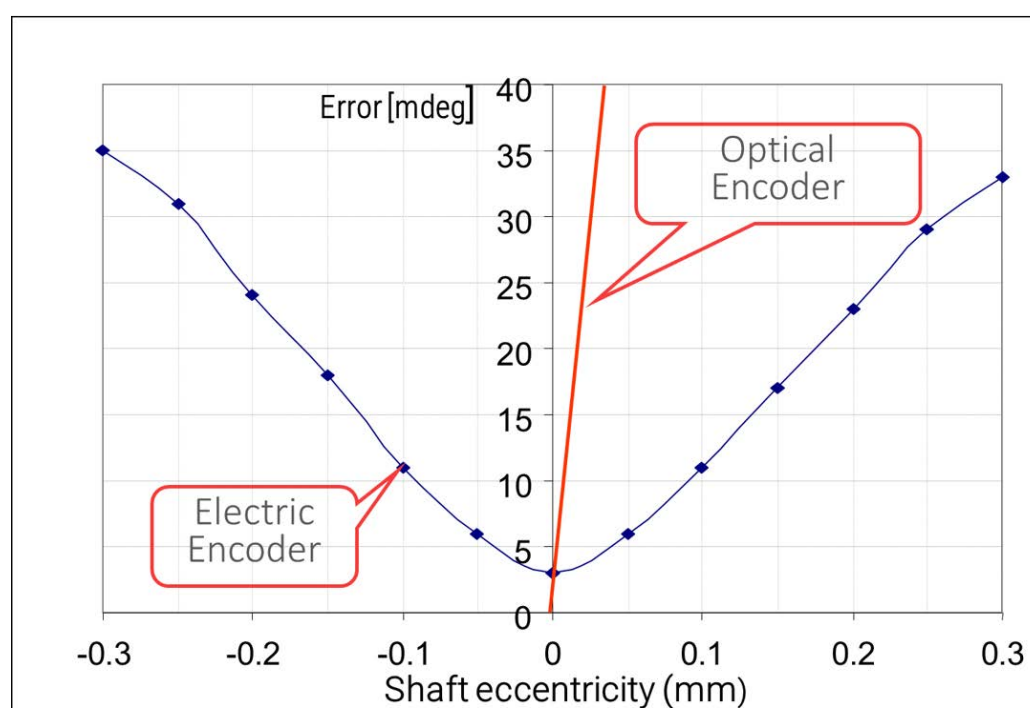

Netzer products are also verified with their high MTBF as shown in below diagram.

T (°C)	MTBF (HOURS)		
	GF (ground fixed)	GM (ground mobile)	SF (space flight)
25°	4,300,000	2,000,000	1,500,000
85°	450,000	300,000	750,000








# DIAMOND SYSTEMS

www.diamondsystems.com

## COMPANY OVERVIEW


This guide presents a sample of our current standard product offerings. We welcome the opportunity to serve you with one of these products or a custom solution based on our vast library of technologies and our worldwide design and manufacturing resources.

### Nvidia Solutions

	FLOYD	ZIGGY	JETHRO	STEVIE	ELTON
					
<b>Jetson Module</b>	Nano&Xavier NX	TX2/TX2i	TX2/TX2i	AGX Xavier	AGX Xavier
<b>Camera</b>	3x CSI-2 4-lane ports	N/A	2x CSI 4-lane	8x CSI 2-lane	8x CSI 2-lane
<b>Display</b>	2x HDMI	1x HDMI	1x HDMI	2x HDMI	1x HDMI, 1x LVDS
<b>Mass Storage</b>	mPCIe M.2 NVME 2280 Micro SD	Micro SD	M.2 SATA 2242 Micro SD	M.2 PCIe x4 NVMe 2280	M.2 PCIe x4 NVMe 2242
<b>Serial Ports</b>	2x RS-232/422/485	2x RS-232	2x RS-232	2x RS-232	2x RS-232
<b>USB</b>	1x USB 3.0 2x USB 2.0	1x USB 3.0 1x USB 2.0	N/A	1x USB 3.0 2x USB 2.0	2x USB 3.0 2x USB 2.0
<b>Ethernet</b>	2x GbE with PoE	1x GbE	1x GbE	2x GbE	2x GbE
<b>CAN</b>	1	N/A	N/A	2	2
<b>Integrated GPIO</b>	8	13	13	13	13
<b>Integrated DAQ</b>	N/A	6x 12-16-bit A/D 2x 12-bit D/A	6x 12-16-bit A/D 2x 12-bit D/A	6x 12-16-bit A/D 2x 12-bit D/A	6x 12-16-bit A/D 2x 12-bit D/A
<b>Expansion</b>	1x PCIe/USB MiniCard	N/A	1x PCIe/USB MiniCard SkyWire Modem Socket	1x PCIe/USB MiniCard	1x PCIe/USB MiniCard SkyWire Modem Socket 1x PCIe x8 4x PCIe x1 PCI Bus Links
<b>Size</b>	143x76 mm	63x67x96 mm	76x107 mm	100x87 mm	102x152 mm



EPSM-10GX4

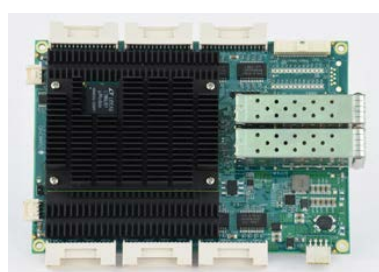

EPS-24G4X



EPS-12G2



EPS-12000-CM



EPS-8100

PRODUCT	DESCRIPTION	COPPER PORTS	FIBER PORTS	FORM FACTOR	DIMENSIONS	NOTES
<b>EPS-8100</b>	Layer 2+ managed 8-Port Gigabit Ethernet switch	8	x	PC/104	90mm x 96mm	Industry-leading rugged compact switch for vehicle applications
<b>EPS-12G2</b>	Layer 2+ managed 12-Port Gigabit Ethernet Switch	12	2x1G/2.5G	COM Express	95mm x 125mm	Economical 12 port rugged switch with dual fiber backbone capability
<b>EPS-12G1</b>	Layer 2+ managed 12-Port Gigabit Ethernet Switch	12	1x1G/2.5G	COM Express	95mm x 125mm	Economical 12 port rugged switch with fiber uplink
<b>EPS-12G0</b>	Layer 2+ managed 12-Port Gigabit Ethernet Switch	12	x	COM Express	95mm x 125mm	Economical 12-port rugged switch



<b>EPS-12G0</b>	Layer 2+ managed 12-Port Gigabit Ethernet Switch	12	x	COM Express	95mm x 125mm	Economical 12-port rugged switch
<b>EPS-12000-CM</b>	Layer 2+ / Layer 3 managed 12-Port Gigabit Ethernet Switch	12	x	COM Express Mini	84mm x 55mm	Ultra-compact, rugged, IEEE-1588 capable
<b>EPS-24016-104</b>	Layer 2+ managed 16-Port Gigabit Ethernet switch	16	x	PC/104	90mm x 96mm	High port density, rugged design
<b>EPS-24026-104</b>	Layer 2+ managed 26-Port Gigabit Ethernet switch	24	2x1G/2.5G	PC/104	90mm x 96mm	High port density, rugged design
<b>EPSM-10GX4</b>	Layer 2+ / Layer 3 managed 28-Port Gigabit Ethernet switch module	24	4 10G	COM Express Mini	84mm x 55mm	Switch module for custom solutions; Layer 3 and IEEE-1588 capability
<b>EPS-24G4X</b>	Layer 2+ / Layer 3 managed 28-Port Gigabit Ethernet Switch	24	4 10G	--	146mm x 102mm	Full featured switch, 10G Layer 3 and IEEE-1588 capability

### ● Rugged Systems

The SABRE family offers rugged mission computers and Ethernet switches for use in the most challenging vehicle environments. MIL-STD-461, 704, and 1275 compliance is available. Systems have been tested to MIL-STD-810G specifications up to 75G shock.

ETHERNET SWITCHES	SABRENET 12000	SABRENET 24000	SABRENET 24G2X
<b>Copper ports</b>	12x 1G	24x 1G	24x 1G
<b>Fiber ports</b>	N/A	N/A	2x 10G
<b>Input voltage</b>	6-34VDC	5-34VDC	5-34VDC
<b>PTP option</b>	Yes	Yes	Yes
<b>Dimensions mm</b>	162Wx137Dx66H	198Wx175Dx66H	198Wx175Dx66H



COMPUTERS	SABRECOM VNS	SABRECOM ARS	SABRECOM ZTA
<b>Processor</b>	Skylake 6th Gen Core i7 i7-6600U 2C 2.6GHz	Bay Trail E3845 2C 1.91GHz	Bay Trail E3845 Apollo Lake E3940/N4200
<b>RAM</b>	4-20GB	4GB	4-8GB
<b>Mass storage</b>	32-256GB SSD	32-256GB SSD	32-256GB SSD
<b>Serial ports</b>	4x RS-232/422/485	4x RS-232/422/485	4x RS-232/422/485
<b>USB ports</b>	4x USB 2.0, 2x USB 3.0	2x USB 2.0	4x USB 2.0, 1x USB 3.0
<b>Ethernet</b>	2x 10/100/1000	2x 10/100/1000	2x 10/100/1000
<b>Integrated GPIO</b>	16	16-24	16-24
<b>Integrated data acquisition</b>	N/A	16x 16-bit A/D 4x 16-bit D/A	16x 16-bit A/D 4x 16-bit D/A
<b>Expansion</b>	PCIe/104, PCI-104, and MiniCard sockets	PC/104-Plus: ISA & PCI 1x MiniCard	1x PCIe/USB MiniCard 1x M.2 SATA socket
<b>Standard enclosure size</b>	198W x 175D x 66H mm	198W x 175D x 66H mm	162W x 137D x 66H mm
<b>Operating system support</b>	Windows 10 IOT LTSC; Linux Ubuntu 16.04 LTS; 64-bit support	Windows 7/10; Linux Ubuntu 16.04 LTS; 32/64-bit support	Windows 7/10; Linux Ubuntu 16.04 LTS; 32/64-bit support

### ● I/O Expansion Modules

Diamond Systems offers a wide range of I/O modules in PC/104 and PCIe MiniCard form factors. Our analog and digital I/O modules are supported by our industry-leading Universal Driver software, consisting of a C language programming library along with example programs and GUI demos that provide instant verification of system operation. All products meet -40°C to +85°C operating temperature.



**I/O Expansion Modules**

Diamond Systems offers a wide range of I/O modules in PC/104 and PCIe MiniCard form factors. Our analog and digital I/O modules are supported by our industry-leading Universal Driver software, consisting of a C language programming library along with example programs and GUI demos that provide instant verification of system operation. All products meet -40°C to +85°C operating temperature.

ANALOG I/O														
Product	Form Factor	#A/D	Res	Max	Min	Gain	Max	Autocal	FIFO	#D/A	Res	Max	Min	GPIO
DMM-32DX-AT	PC/104	32 SE, 16 DI	16	±10V	0-625V	Program	250K	Auto	1024	4	16	±10V	0-5V	24 I/O
DMM-32X-AT	PC/104	32 SE, 16 DI	16	±10V	0-625V	Program	250K	Yes	1024	4	12	±10V	0-5V	24 I/O
DMM-16R-AT	PC/104	16SE, 8 DI	16	±10V	0-1.25V	Program	100K	Yes	512	4	12	±10V	0-5V	8 In, 8 Out
DMM-16RP-AT	PC/104-Plus	16SE, 8 DI	16	±10V	0-1.25V	Program	100K	Yes	512	4	12	±10V	0-5V	8 In, 8 Out
DMM-AT	PC/104	16SE, 8 DI	12	±10V	0-1.25V	Program	100K	Yes	512	2	12	±10V	0-5V	8 In, 8 Out
DMM-XT	PC/104	16SE, 8 DI	12	±10V	0-1.25V	Jumper	100K			2	12	0-5V	0-5V	8 In, 8 Out
DS-MPE-DAQ0804	MiniCard	8SE, 4 DI	16	±10V	0-5V	Program	100K		2048	4	16	0-5V	0-2.5V	14 I/O
RMM-1616A-XT	PC/104									16	16	Voltage ranges: ±10V, ±5V, 0-10V, 0-5V		48 I/O
RMM-816A-XT	PC/104									8	16			48 I/O
RMM-416A-XT	PC/104									4	16			48 I/O
RMM-1616AP-XT	PC/104-Plus									16	16	Current ranges: 0-20mA, 0-24mA, 4-20mA		48 I/O
RMM-816AP-XT	PC/104-Plus									8	16			48 I/O
RMM-416AP-XT	PC/104-Plus									4	16			48 I/O



DMM-32DX-AT




DMM-16RP-AT




RMM-1616AP-XT




GPIO-MM-XT

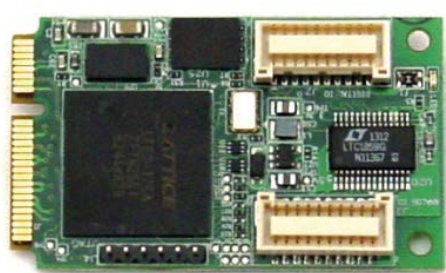

DS-MPE-DAQ0804

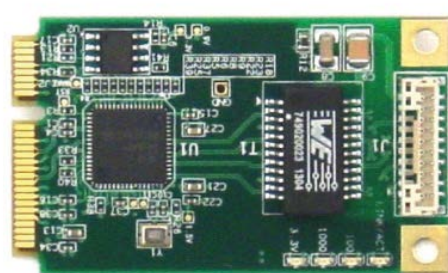

DS-MPE-GE210  
Ethernet Minicard

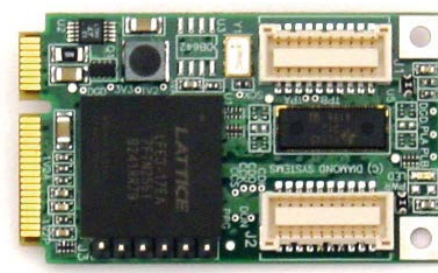

DS-MPE-GPIO




DS-MPE-CAN2L  
Ethernet Minicard

**DIGITAL I/O**

Product	Form Factor	#GPIO	Voltage	Buffered	Direction	Opto	Relays	Load	Counters	Ctr Bits	Max Rate
OMM-XT	PC/104	48	5V		Programmable				3	16	10MHz
OMM-DIO-XT	PC/104	48	5V		Programmable						
GPIO-MM-XT	PC/104	100	5V	Yes	Programmable				10	16	10MHz
DS-MPE-GPIO	MiniCard	36	5V/3.3V	Yes	Programmable				8	32	50MHz
PMM-P	PC/104						16 SPDT	30VDC/2A			
OPMM-1616-XT	PC/104					16 In 3-30VDC	16 SPDT	30VDC/2A			
IR104-PBF	PC/104					20 In 3-24V	20 SPST	30VDC/5A			



EMM-8EL-XT



EMM-8P-XT




EMM-8PLUS-XT




EMM-4M-XT



EMM-OPT4-XT

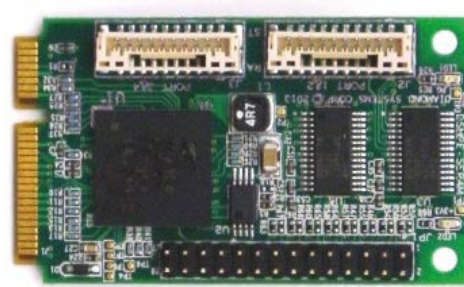

DS-MPE-SER4M

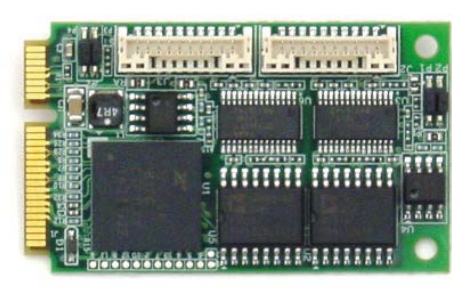

DS-MPE-OPT4232



# SILICON POWER

[www.silicon-power.com](http://www.silicon-power.com)

## COMPANY OVERVIEW

With over 16 years of experience, Silicon Power has become a trusted service-driven provider of professional NAND flash storage and DRAM modules for industrial and enterprise applications.

### DDR4 DRAM MODULES

Model	SODIMM	UDIMM	ECC SODIMM	ECC UDIMM	ECC RDIMM
<b>DRAM Type</b>	DDR4	DDR4	DDR4	DDR4	DDR4
<b>Capacity</b>	2GB, 4GB, 8GB, 16GB, 32GB	4GB, 8GB, 16GB, 32GB	4GB, 8GB, 16GB, 32GB	4GB, 8GB, 16GB, 32GB	4GB, 8GB, 16GB
<b>Data Rate</b>	2400 / 2600 MHz	2400 / 2600 MHz	2400 / 2600 MHz	2400 / 2600 MHz	2400 / 2600 MHz
<b>CAS Latency</b>	CL17 / CL19	CL17 / CL19	CL17 / CL19	CL17 / CL19	CL17 / CL19
<b>Voltage</b>	1.2V	1.2V	1.2V	1.2V	1.2V
<b>Pin Count</b>	260 Pin	288 Pin	260 Pin	288 Pin	288 Pin
<b>Data Width</b>	64Bits	64Bits	72Bits	72Bits	72Bits
<b>PCB Height</b>	30.13 mm	31.40 mm	30.13 mm	31.40 mm	31.40 mm
<b>Standard 0~85°C</b>	Supported	Supported	Supported	Supported	Supported
<b>Industrial -40~85°C</b>	Supported	Supported	Supported	Supported	Supported
<b>Storage -55~95°C</b>	Supported	Supported	Supported	Supported	Supported

### DDR3 DRAM MODULES

Model	SODIMM	UDIMM	ECC SODIMM	ECC UDIMM	ECC RDIMM
<b>DRAM Type</b>	DDR3L	DDR3L	DDR3L	DDR3L	DDR3L
<b>Capacity</b>	2GB, 4GB, 8GB	2GB, 4GB, 8GB	4GB, 8GB	4GB, 8GB	8GB
<b>Data Rate</b>	1600 MHz	1600 MHz	1600 MHz	1600 MHz	1600 MHz
<b>CAS Latency</b>	CL 11	CL 11	CL 11	CL 11	CL 11
<b>Voltage</b>	1.35V	1.35V	1.35V	1.35V	1.35V
<b>Pin Count</b>	204 Pin	240 Pin	204 Pin	240 Pin	240 Pin
<b>Data Width</b>	64Bits	64Bits	72Bits	72Bits	72Bits
<b>PCB Height</b>	30.50 mm	30.50 mm	30.50 mm	30.50 mm	30.50 mm
<b>Standard 0~85°C</b>	Supported	Supported	Supported	Supported	Supported
<b>Industrial -40~85°C</b>	Supported	Supported	Supported	Supported	Supported
<b>Storage -55~95°C</b>	Supported	Supported	Supported	Supported	Supported

### SSDS

Form Factor	M.2	M.2	2.5"	2.5"	mSATA
<b>Interface</b>	PCIe Gen3, NVMe	SATA III	SATA III	IDE / PATA	SATA III
<b>Capacity</b>	64 GB - 2 TB	8 GB - 1 TB	8 GB - 4 TB	128 MB - 128 GB	8 GB - 1 TB
<b>Supported Flash Types</b>	3D TLC	SLC, MLC, 3D TLC	SLC, MLC, 3D TLC	SLC, MLC	SLC, MLC, 3D TLC
<b>Industrial -40~85°C</b>	Supported	Supported	Supported	Supported	Supported

### FLASH CARDS

Form Factor	CFExpress	Compact Flash	SD	micro SD
<b>Interface</b>	Cfast 2.0	CF 6.0	SD 3.0	SD 3.0
<b>Capacity</b>	4 GB - 512 GB	128 MB - 256 GB	256 MB - 256 GB	256 MB - 256 GB
<b>Supported Flash Types</b>	SLC, MLC, 3D TLC	SLC, MLC	SLC, MLC, 3D TLC	SLC, MLC, 3D TLC
<b>Industrial -40~85°C</b>	Supported	Supported	Supported	Supported



[www.saccaeurope.com](http://www.saccaeurope.com)  
[info@saccaeurope.com](mailto:info@saccaeurope.com)

**The Netherlands**

Steenowenweg 5, 5708HN, **Helmond**

**+31 492 218 972**

**Poland**

Wspólna 70, Mazowieckie 00-687, **Warsaw**

**+48 221 822 534**