




SACA
— europe —

stabilization (gimbal + turret)

Gimbals are mechanical devices that provide stabilization by counteracting unwanted movement and vibrations, allowing cameras, sensors, or other payloads to remain steady and level. Turrets, on the other hand, enable precise pointing, tracking, and stabilization of mounted equipment, such as weapons systems or surveillance tools. Whether used in military operations, or surveillance, stabilization technology has significantly improved the quality, accuracy, and effectiveness of capturing and tracking objects in motion.

manufacturers

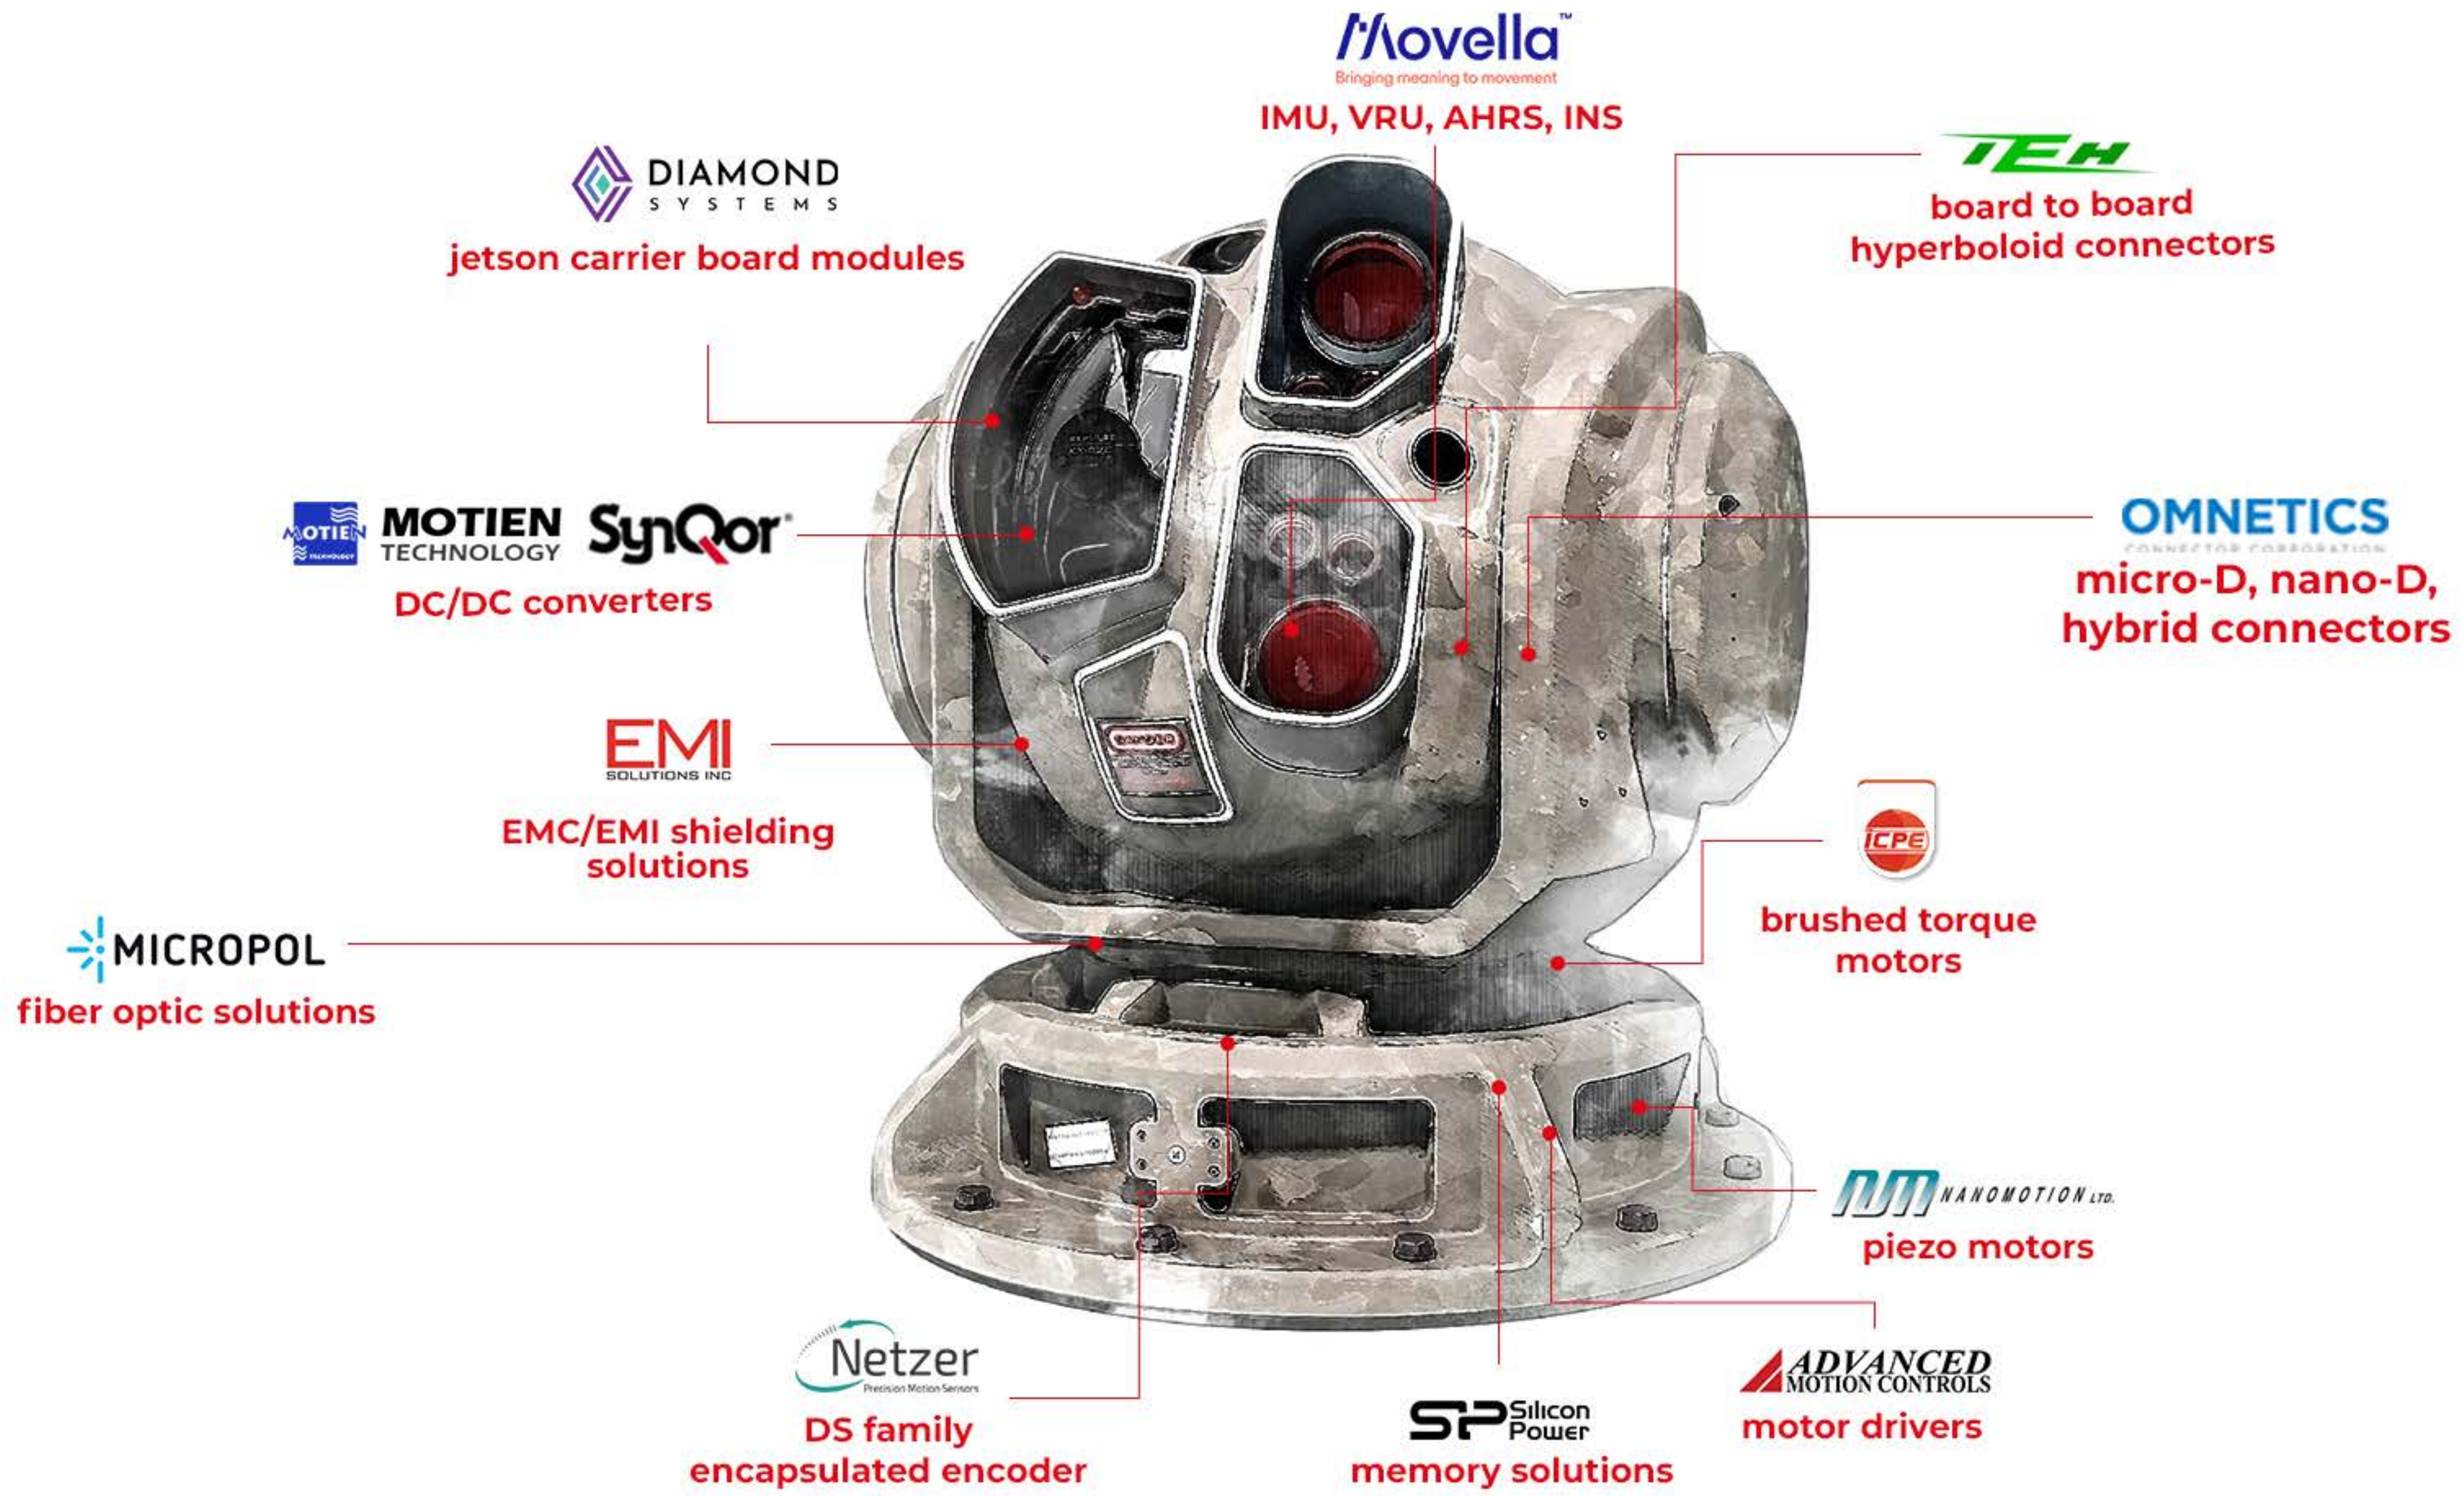



SYNQOR

www.synqor.com

COMPANY OVERVIEW

SynQor® is a leading supplier of power conversion solutions to the military, industrial, rail transportation, commercial avionics, medical and telecom/datacom markets. SynQor's innovative products are designed to exceed the demanding performance, quality, and reliability requirements of today's power electronic engineers and system integrators who develop leading-edge infrastructure hardware.

MCOTS DC-DC CONVERTER



MCOTS PRODUCT FEATURES

- ▶ High efficiency, up to 95% at full rated load current
- ▶ Fixed frequency switching provides predictable EMI
- ▶ No minimum load requirement
- ▶ Rugged design for harsh environments
- ▶ Full Feature option on some models
- ▶ Flanged baseplate available
- ▶ Industry standard pin-out configurations and standard footprints.
- ▶ Available: High-capacitance option for very large output capacitance and extreme transient applications
- ▶ -55 °C to +100 °C Operating Temperature

COMPLIANCE FEATURES


MilCOTS converters with MilCOTS filters are designed to meet:

- ▶ MIL-HDBK-704
- ▶ RTCA/DO-160 Section 16, 17, 18
- ▶ MIL-STD-1275
- ▶ MIL-STD-461
- ▶ DEF-STAN 61-5 (part 6)/(5, 6)

PROTECTION/CONTROL FEATURES

- ▶ Input under-voltage lockout
- ▶ Output current limit and short circuit protection
- ▶ Active back bias limit
- ▶ Output over-voltage protection
- ▶ Thermal shutdown (not on DM Package Size)
- ▶ On/Off control referenced to input side (ON/OFF control isolated in Full Bricks)
- ▶ Remote sense for the output voltage
- ▶ Digital Output Current Sharing (HZ & HY only)
- ▶ Output voltage trim range of:
 - (Half-Brick Zeta/Yota) **+10% to -50%**
 - (Quarter-Brick Exa) **+10% to -50%**
 - (Sixteenth Brick) **+10% to -10%**

INQOR DC-DC CONVERTER

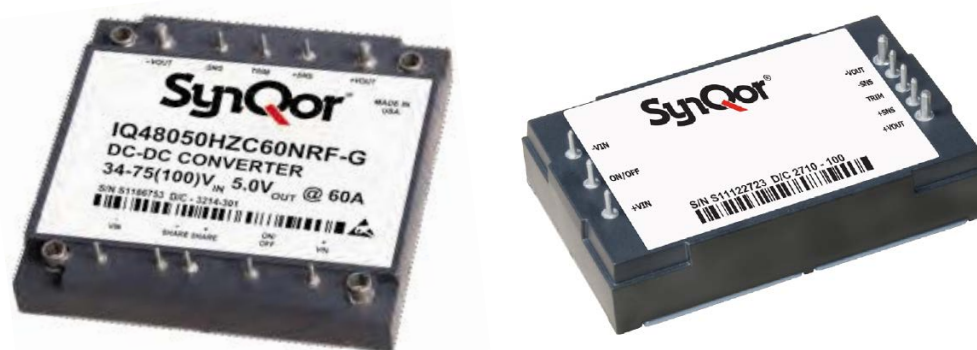


OPERATIONAL FEATURES

- ▶ High efficiency up to 95%
- ▶ Input voltage ranges from 9 V to 425 V
- ▶ Output power up to 600 W
- ▶ Fixed frequency switching, low output noise
- ▶ No minimum load requirement
- ▶ Full Feature option on some models
- ▶ Industry standard pin-out configurations and standard footprints
- ▶ Operating Temperature -40 °C to +100 °C
- ▶ Output Voltage Set Point ±1.0%
- ▶ Output Voltage Ripple <1% of Vout (typ.) pk-pk
- ▶ Isolation Voltage Up to 4250 Vdc

PROTECTION/CONTROL FEATURES

- ▶ Input under-voltage lockout
- ▶ Output current limit and short circuit protection
- ▶ Active back bias limit prevents damage to converter from external load induced pre-bias
- ▶ Digital output current sharing (Half Brick Zeta only)
- ▶ Output over-voltage protection
- ▶ Thermal shutdown
- ▶ Trimmable output voltages

EFFICIENCY

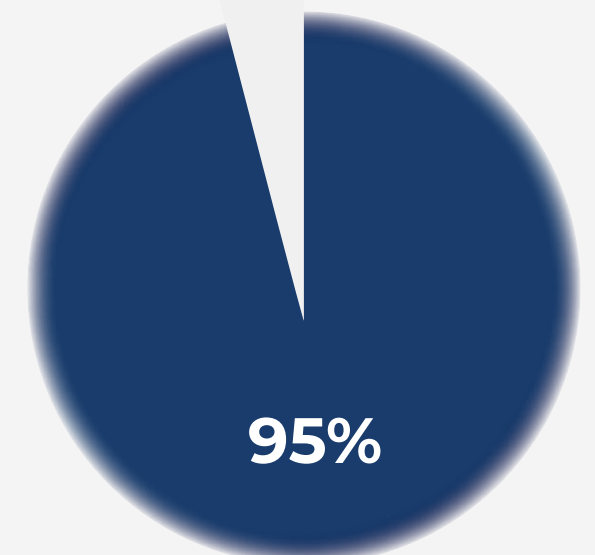

Continuous Input	34-160 V
Output	1.8-48 V
Max Power	120 W
Reinforced Isolation	3000 Vdc
Quarter Brick	DC/DC Converter



ISOLATED DC-DC CONVERTERS

12 VDC INPUT (9-22 VDC INPUT RANGE, TRANSIENT 25 V)

	VOUT	1.8 V	3.3 V	5 V	7 V	12 V	15 V	24 V	28 V	30 V	40 V	48 V
Half Brick	HPC	60 A 108 W	50 A 165 W	36 A 180 W		15 A 180 W	12 A 180 W	7.5 A 180 W	6.5 A 182 W		4.5 A 180 W	3.7 A 178 W
	HTC	50 A 90 W	40 A 132 W	28 A 140 W		12 A 144 W	9.5 A 143 W	6 A 144 W	5 A 140 W		3.5 A 140 W	3 A 144 W
Quarter Brick	QTC	40 A 72 W	30 A 99 W	20 A 100 W	14 A 98 W	8 A 96 W	7 A 105 W	4 A 96 W		3 A 90 W		2 A 96 W
	QGC	30 A 54 W	20 A 66 W	15 A 75 W	10 A 70 W	6 A 72 W	5 A 75 W	3 A 72 W		2.4 A 72 W		1.5 A 72 W

24 VDC INPUT (18-36 VDC INPUT RANGE, TRANSIENT 50 V)

	VOUT	1.8 V	3.3 V	5 V	7 V	12 V	15 V	24 V	28 V	30 V	40 V	48 V	50 V
Half Brick	HZC			60 A 300 W		42 A 504 W	34 A 510 W	21 A 504 W	18 A 504 W		12.5 A 500 W		10 A 500 W
	HEC								14 A 392 W				8 A 400 W
	HPC	60 A 108 W	50 A 165 W	40 A 200 W		8 A 216 W	8 A 216 W	9 A 216 W	7.5 A 210 W		10 A 500 W	4.5 A 216 W	
	HTC	50 A 90 W	40 A 132 W	30 A 150 W		13 A 156 W	10 A 150 W	6.5 A 156 W	5.5 A 154 W		4 A 160 W	3.3 A 158 W	
Quarter Brick	QTC	40 A 72 W	30 A 99 W	20 A 100 W	14 A 98 W	8 A 96 W	8 A 120 W	5 A 120 W		4 A 120 W		2.5 A 120 W	
	QGC	32 A 58 W	25 A 83 W	18 A 90 W	13 A 91 W	7.5 A 90 W	6 A 90 W	3.7 A 89 W		3 A 90 W		1.8 A 91 W	
	QMC									2 A 60 W		1.2 A 58 W	
Sixteenth Brick	SGC		15 A 50 W	10 A 50 W	7 A 49 W	4 A 48 W	3.3 A 48 W	2 A 48 W	1.8 A 50 W			1 A 48 W	

48 VDC INPUT (34-75 VDC INPUT RANGE, TRANSIENT 100 V)

	VOUT	1.8 V	3.3 V	5 V	7 V	12 V	15 V	24 V	28 V	30 V	40 V	48 V	50 V
Half Brick	HZC			60 A 300 W		50 A 600 W	40 A 600 W	25 A 600 W	21.5 A 602 W		15 A 600 W		12 A 600 W
	HPC	60 A 108 W	60 A 198 W	46 A 230 W		21 A 252 W	17 A 255 W	10.5 A 252 W	9 A 252 W		6.3 A 252 W	5.2 A 250 W	
	HTC	50 A 90 W	45 A 149 W	34 A 170 W		16 A 192 W	13 A 195 W	8 A 192 W	7 A 196 W		5 A 200 W	4 A 192 W	
Quarter Brick	QTC	40 A 72 W	30 A 99 W	25 A 125 W	20 A 140 W	12 A 144 W	10 A 150 W	6 A 144 W		5 A 150 W		3 A 144 W	
	QGC	32 A 58 W	25 A 83 W	21 A 105 W	15 A 105 W	9 A 108 W	7 A 105 W	4.5 A 108 W		3.5 A 105 W		2.2 A 106 W	
Sixteenth Brick	SGC	28 A 50 W	15 A 50 W	10 A 50 W	7 A 50 W	4.1 A 50 W	3.3 A 50 W		1.8 A 50 W				


72 VDC INPUT (42-110 VDC INPUT RANGE)

	VOUT	1.8 V	3.3 V	5 V	7 V	12 V	15 V	24 V	28 V	30 V	40 V	48 V
Half Brick	HPC	60 A 108 W	60 A 198 W	46 A 230 W		21 A 252 W	17 A 255 W	10.4 A 250 W	9 A 252 W		6.3 A 252 W	5.2 A 250 W
	HTC	50 A 90 W	45 A 149 W	34 A 170 W		16 A 192 W	13 A 195 W	8 A 192 W	7 A 196 W		5 A 200 W	4 A 192 W
Quarter Brick	QTC		30 A 99 W	25 A 125 W	20 A 140 W	12 A 144 W	10 A 150 W	6 A 144 W		5 A 150 W		3 A 144 W
	QGC		5 A 83 W	20 A 100 W	15 A 105 W	9 A 108 W	7 A 105 W	4.5 A 108 W		3.5 A 105 W		2 A 96 W


110 VDC INPUT (66-160 VDC INPUT RANGE, TRANSIENT 170 V)

	VOUT	3.3 V	5 V	7 V	12 V	15 V	24 V	28 V	30 V	40 V	48 V
Half Brick	HPC	60 A 198 W	48 A 240 W		21 A 252 W	17 A 255 W	10 A 240 W	9 A 252 W			
	HTC	45 A 149 W	34 A 170 W		16 A 192 W	13 A 195 W	8 A 192 W	7 A 196 W			
Quarter Brick	QTC	30 A 99 W	25 A 125 W	20 A 140 W	12 A 144 W	10 A 150 W	6 A 144 W		5 A 150 W		
	QGC	23 A 76 W	18 A 90 W	15 A 105 W	9 A 108 W	7 A 105 W	4.5 A 108 W		3.5 A 105 W		

PRODUCT FAMILY MATRIX

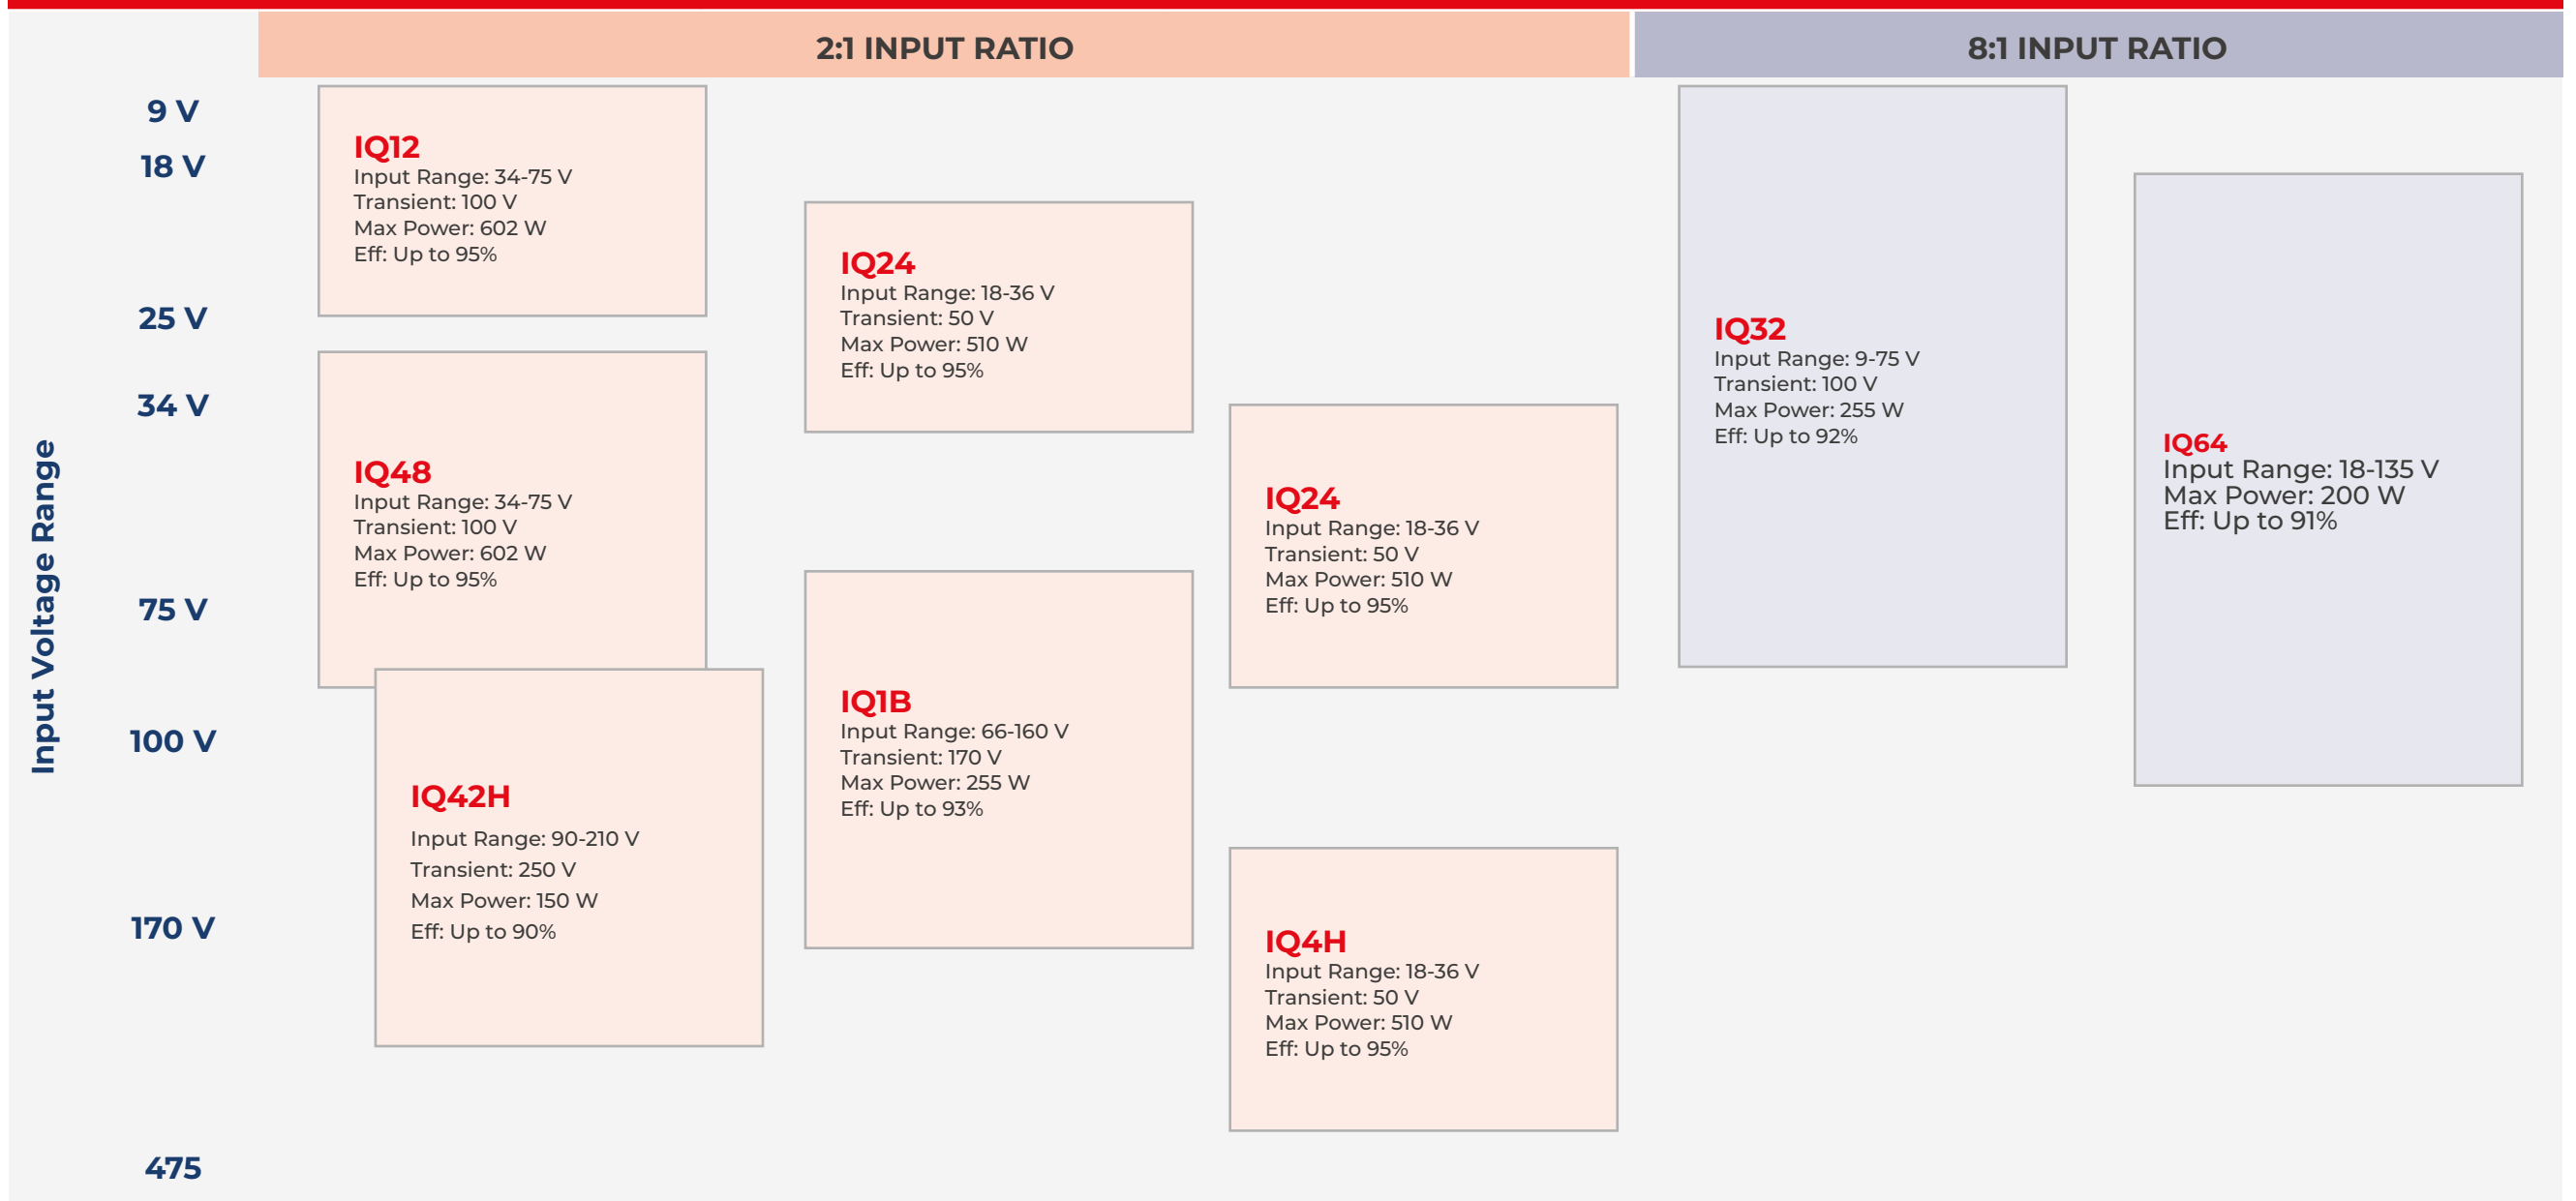

PRODUCT FAMILY MATRIX

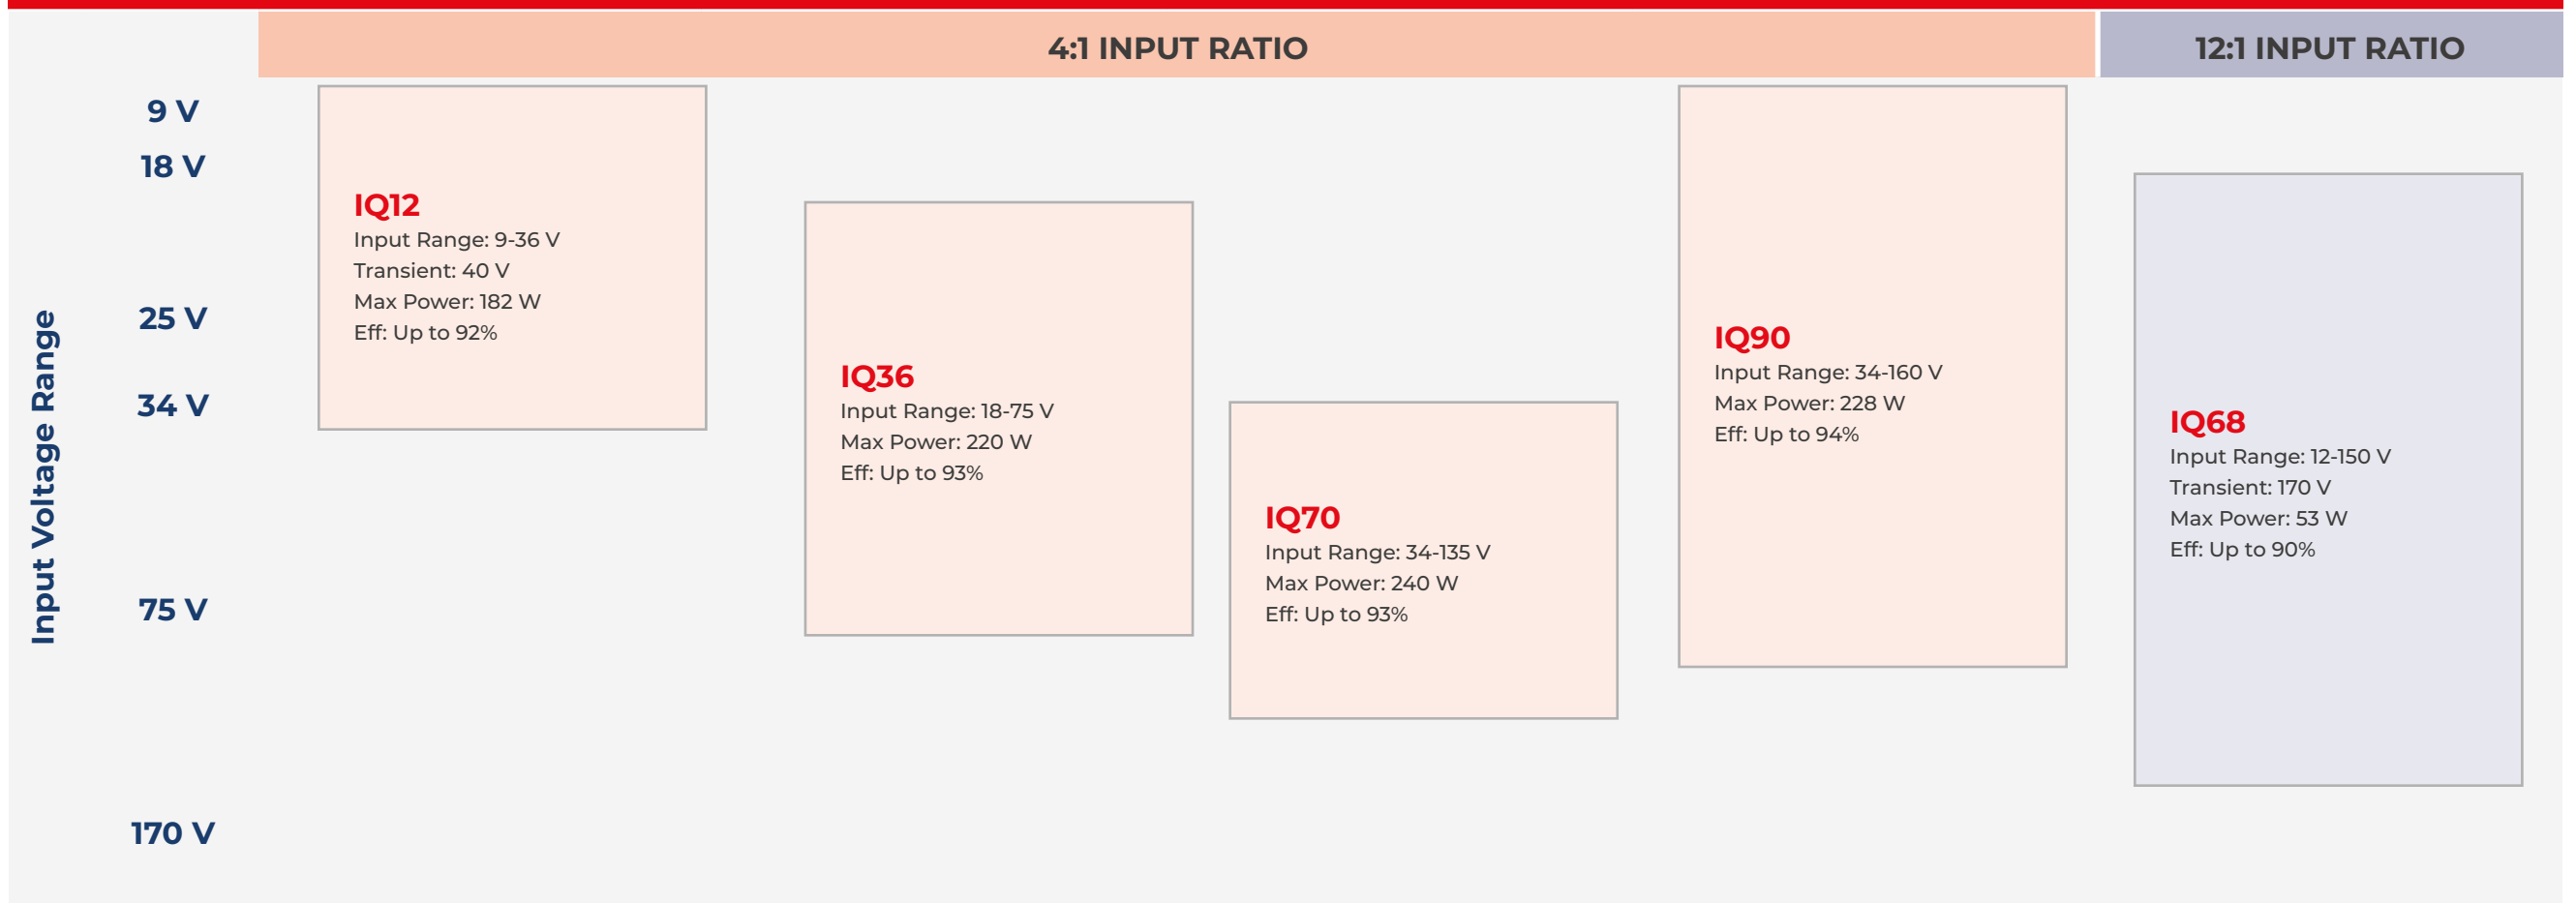

Input Voltage	Mode	Output Voltage	Package Size	Series	Thermal Design	Maximum Current	Options Description:		
							Enable Logic	Pin Length	Feature Set
IQ	12: 9-22 V 18: 9-36 V 24: 18-36 V 32: 9-75 V 36: 18-75 V 48: 34-75 V 64: 18-135 V 68: 12-150 V 70: 34-135 V 72: 42-110 V 90: 34-160 V 1B: 66-160 V 2H: 90-210 V 4H: 180-425 V	012: 1.2 V 015: 1.5 V 018: 1.8 V 025: 2.5 V 033: 3.3 V 050: 5 V 070: 7 V 120: 12 V 150: 15 V 240: 24 V 280: 28 V 300: 30 V 400: 40 V 480: 48 V 500: 50 V	S: Sixteenth Brick Q: Quarter Brick H: Half Brick F: Full Brick	K: Kilo M: Mega G: Giga T: Tera P: Peta E: Exa Z: Zeta	C: Encased D: Encased, Non-threaded Baseplate V: Encased, Flanged Baseplate	60: 60 A 50: 50 A 30: 30 A 10: 10 A 06: 6 A 02: 2 A (not all shown)	N: Negative	K: 0.110" N: 0.145" R: 0.180" Y: 0.250"	S: Standard (1/8 & 1/4 only) C: Current monitor output/trimmable current limit (1/8 & 1/4 only) F: Current share/trimmable current limit (half brick only)

MOTIEN TECHNOLOGY

www.motien.com.tw

COMPANY OVERVIEW

MOTIEN Technology is the professional and leading manufacturer of power solution since the establishment on 1998, with the great efforts and continually improvement for decades on power supplies, the brand MOTIEN has become well known and a symbol of quality and preferred & trusted DC power source.

Motien has more than 30 series of DC/DC converters, LED drivers and AC/DC converter modules. Products are widely built in modern electronic equipments: Industries Automation equipments, Telecommunication equipments, instruments, transportation system, medical equipments etc.

● GENERAL SPECIFICATION

- Power rating: 0.25W~60W
- DC / DC converters, LED drivers
- Customized products
- Minor change of standard product
- New product development

PRODUCT GROUPS



RAILWAY SERIES

SMD SERIES

LED DRIVERS

ISOLATED DC/DC CONVERTERS

- ▶ SIP-Packages
- ▶ DIP-Packages

NON - ISOLATED DC/DC CONVERTERS

- ▶ SIP-Packages
- ▶ SMD-Packages

MOVELLA

www.movella.com

COMPANY OVERVIEW

Movella is the leading innovator in 3D motion tracking technology and products. Our sensor fusion technologies enable a seamless interaction between the physical and the digital world in consumer electronics devices and professional applications such as Motion Capture, Motion Analysis, healthcare, sports and industrial applications.



MTI-600 SERIES



- Fully supported by the MT Software Suite (free use), enabling our customers a faster time to market
- Small footprint, flexible mounting options
- Industrial grade accuracy & reliability at affordable pricing, 100% calibrated and tested
- Rich interface platform, incl. CAN bus support
- External and internal GNSS-RTK receiver support
- Advanced proprietary XKF3 core sensor fusion algorithms
- State-Of-The-Art hardware components
- Extensive technical support
- RTK Solution
- ITAR-free

MTI 100 SERIES



- Highest performance with resistance to magnetic distortions
- Vibration-rejecting gyroscopes and accelerometers
- Configurable output settings, synchronizes with any 3rd party device








MTI-G-710



- All-in-one sensor system with high-frequency position and orientation output
- Excellent heading tracking without requiring a magnetic field
- Configurable output settings, synchronizes with any 3rd party device

	ROLL/PITCH STATIC	ROLL/PITCH DYNAMIC	YAW	SENSOR FUSION CORE	POSITION & VELOCITY
MTi 1-series					
MTi-1 IMU	-	-	-	-	-
MTi-2 VRU	0.5°	0.8°	AHS	XKF	-
MTi-3 AHRS	0.5°	0.8°	2.0°	XKF	-
MTi-7 GNSS/INS	0.5°	0.5°	1.5°	XKF	1m 0.05m/s
MTi 600-series					
MTi-610 IMU	-	-	-	-	-
MTi-620 VRU	0.2°	0.5°	AHS	XKF	-
MTi-630 AHRS	0.2°	0.5°	1.0°	XKF	-
MTi-670 GNSS/INS	0.2°	0.5°	1.0°	XKF	1m 0.05m/s
MTi-680G RTK-GNSS/INS	0.2°	0.5°	1.0°	XKF	0.05m / 0.05m/s
MTi 10-series					
MTi-30 AHRS	0.2°	0.5°	1.0°	XKF	-
MTi 100-series					
MTi-100 IMU	-	-	-	-	-
MTi-200 VRU	0.2°	0.3°	AHS	XEE	-
MTi-300 AHRS	0.2°	0.3°	1.0°	XEE	-
MTi-G-710 GNSS/INS	0.2°	0.3°	0.8°	XEE	1m 0.05m/s

REAL-TIME SENSOR FUSED DATA

		IMU (1)	VRU (2)	AHRS (3)	GNSS/INS (7)	RTK-enabled GNSS / INS (8)	RTK-enabled VINS
		Inertial Measurement Unit	Vertical Reference Unit	Attitude and Heading Reference System	GNSS / GPS enabled Inertial Navigation System	Real Time Kinematics	Attitude and Heading Reference System
 Gyroscope		Roll	Roll	Roll	Roll	Roll	Roll
 Accelerometer		Pitch	Pitch	Pitch	Pitch	Pitch	Pitch
 Magnetometer		Unref. Yaw	Unref. Yaw	Unref. Yaw	Unref. Yaw	Unref. Yaw	Unref. Yaw
 Barometer					3D Position	cm-level 3D Position	3D Position
 GNSS Receiver					3D Velocity	3D Velocity	3D Velocity
					GNSS Time	GNSS Time	GNSS Time
 RTK Corrections							
 Camera (B&W) & Wheel Odometry (External Source)						Long term dead-reckoning	

OMNETICS

www.omnetics.com

COMPANY OVERVIEW

Omnetics is a world-class miniature connector design and manufacturing company with over 30 years of experience, focused on Micro-miniature and Nano-miniature highly reliable electronic connectors and interconnection systems. Our miniature connectors are designed and assembled in a single location at our plant in Minneapolis, Minnesota.

SINGLE ROW NANO-D

Horizontal SMT (AA)	Vertical SMT (VV)	Straight Tails (DD)	Thru-Hole Horizontal (H2)	Thru-Hole Vertical (V2)	Pre-Wired (W2)	Jumpers (JU)	MILDTL-32139 QPL


LATCHING NANO-D

Surface Mount (AA)	Flex Mount (FF)	Straight Thru-Hole (DD)	Pre-Wired (WD)

LOW PROFILE MICRO-D


Discrete Wired (WD)	Right Angle Thru-Hole (H1)	Right Angle Thru-Hole (R2)	Solder Cup (SS)	Straight Thru-Hole (S2)

● Power and Signal Micro Hybrids: 10A, 5A, 3A

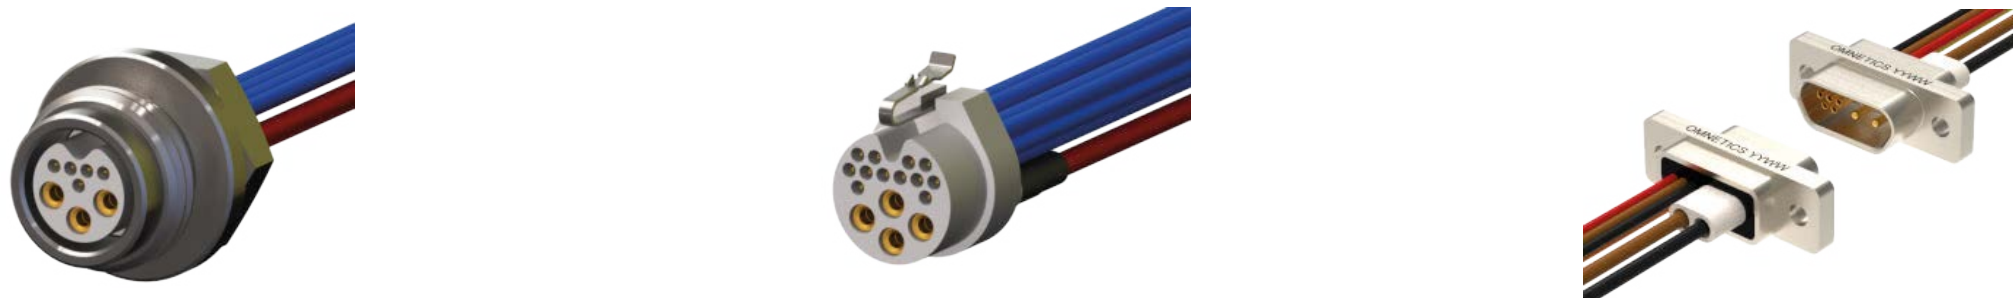

● Nano Coax Connectors

Omnetics Nano Coax contacts are available either in a Hybrid Micro-D or as a standalone contact... The standalone version provides optimal performance in one of the lowest form factors on the market. The Nano Coax contacts are designed to be terminated to a low-loss 29 AWG (.047") 50 coax cable. Cable-Cable: 20GHz / Edge Launch: 20GHz / Thru Hole: 10GHz

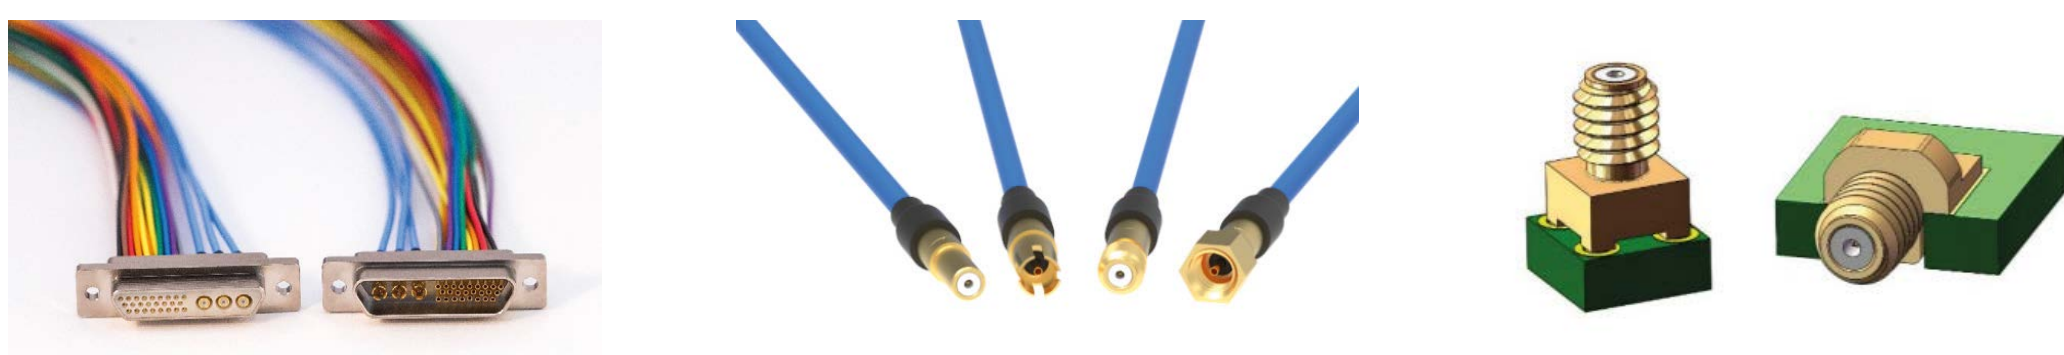

● Micro 360® Circular Connectors

Omnetics' Micro Circular Connector Series utilizes Omnetics' rugged and reliable Flex-Pin contact system, is spaced on 50 mil (1.27mm) centerlines, features a mated length of less than 12.4 mm, and is specified to MIL-DTL-83513.



Discrete Wired (WD)



Right Angle Thru-Hole (H1)



Right Angle Thru-Hole (R2)



Solder Cup (SS)



Straight Thru-Hole (S2)

● IP68 Nano Circulars


Omnetics' Micro Circular Connector Series utilizes Omnetics' rugged and reliable Flex-Pin contact system, is spaced on 50 mil (1.27mm) centerlines, features a mated length of less than 12.4 mm, and is specified to MIL-DTL-83513.



Full Keyed Breakaway (M)



Full Keyed Breakaway (F)



Ratcheting - RMCP



Ratcheting - RMCS

● Micro Strip Connectors

XT									
IR104-PBF	PC/104			5-30VDC 20 In 3-24V	20 SPST	30VDC/5A			

Single row: pin count changes up to 48
Dual row: pin count changes up to 97 available with latch

● Nano Strip Connectors



EMM-8EL-XT



EMM-8P-XT



EMM-8PLUS-XT



EMM-4M-XT

2-60 positions for single row
2-48 for dual row

● Polarized Nano Connector (PZN)

This configuration effectively polarizes the connector without the additional space required for guide pins. Termination options include: Pre-Wiring, Straight tail, Horizontal SMT, and Vertical SMT. Up to 24 positions.

SERIAL I/O											
Product	Form Factor	#RS-232	Max Rate	#RS-422	Max Rate	#RS-485	Max Rate	Isolated	Protocol	Address	GPIO

● Capabilities

LATCHING NANO-D



EMI SHIELDING



CUSTOM HARNESSING



CUSTOM METAL SHELL






IEH

www.iehcorp.com

COMPANY OVERVIEW

Since 1941, IEH has been manufacturing superior products for demanding applications. Whether it's printed circuit board connectors, signal or power contacts, or custom interconnects, focus is delivering the right connector solution.


● Hyperboloid Technology

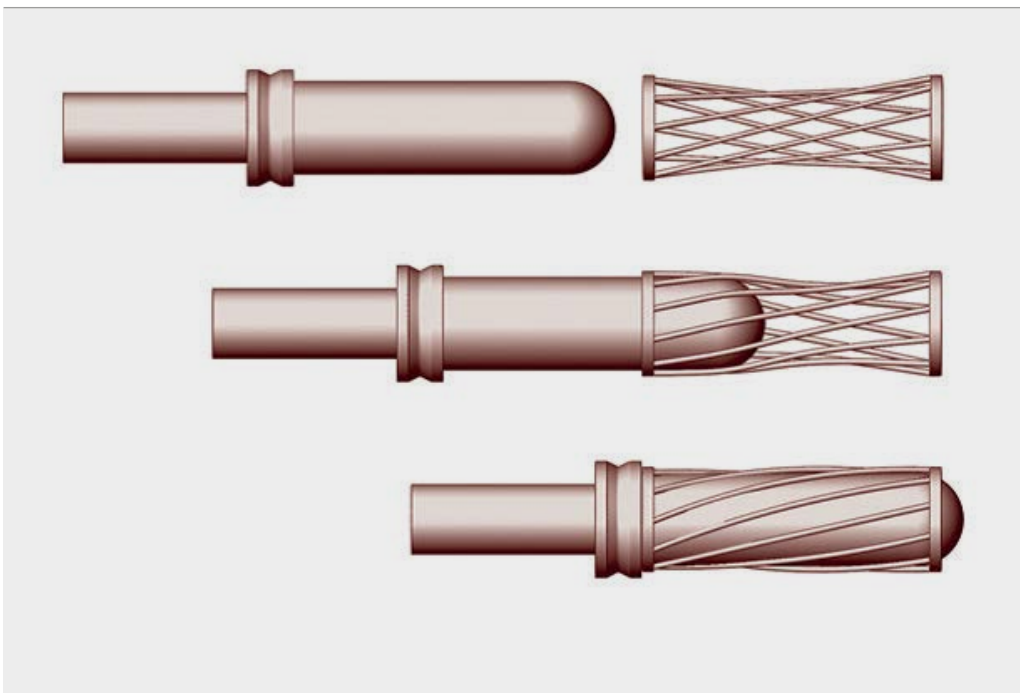


Utilized in all of our receptacle connectors, this unique design offers superior capability in every critical parameter of connector performance:

- ▶ Very low insertion force
- ▶ All but impervious to shock & vibration (Test exceed 300 g's without discontinuity.)
- ▶ 100,000 minimum duty cycles
- ▶ Extremely low contact resistance
- ▶ Improved current carrying capacity (The low contact resistance gives a lower °C rise from ambient under load. This feature often allows the user to operate the same size contact under higher load.)
- ▶ High reliability


PCB CONNECTORS

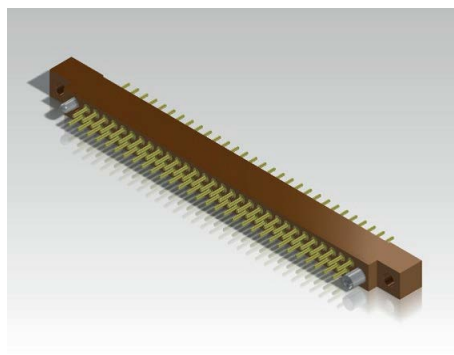


Type N Circulator from
300MHz to 10 GHz

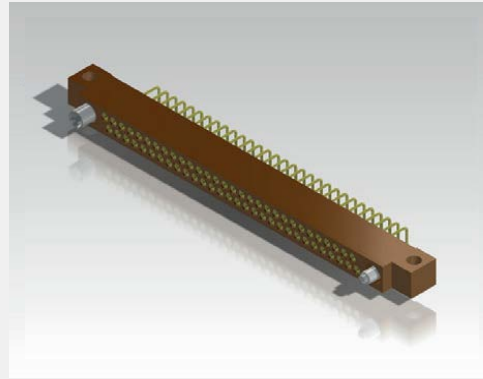

HRM Series - .075" centers
2 & 3 row 10-206pos
M55302 /190 /193

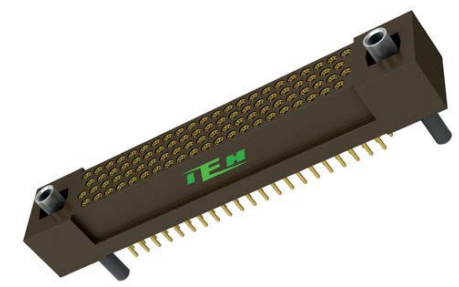


HMM Series - .075" centers
4, 6 & 8 row 58-604pos

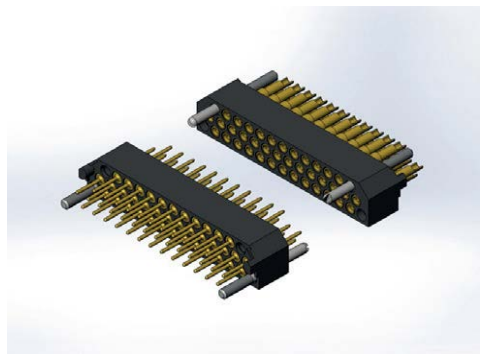

HGC/HGS Series
Low-Profile for parallel boards
22-90pos



HVM Series - .050" centers
2-row
10-100pos

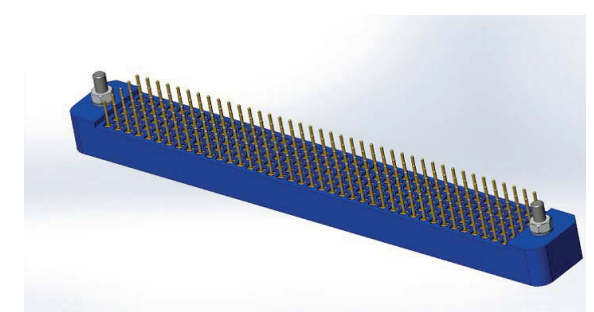

HMK Series - .100" centers,
2, 3, 4 & 5 row
17-490pos

HYPERKINETIC® CONNECTORS - HIGH SPEED, HIGH DENSITY MODULAR




HKC (cPCI Series)

- ▶ Interchangeable with COTS board layout but with Hyperboloid Contact System
- ▶ 2mm Footprint of cPCI PICMG 2.0
- ▶ LCP Insulator Meets Outgassing Requirements
- ▶ Press-fit or Solder tail Terminations



HKX (VPX-Compatible Series)

- ▶ VITA-46 Platform
- ▶ Data Rates up to 10 Gbps
- ▶ 3U, 6U and Custom Configurations
- ▶ Custom Wafer Design for Mixing
- ▶ Differential and Single-ended Circuits
- ▶ Press-fit or Solder tail Terminations

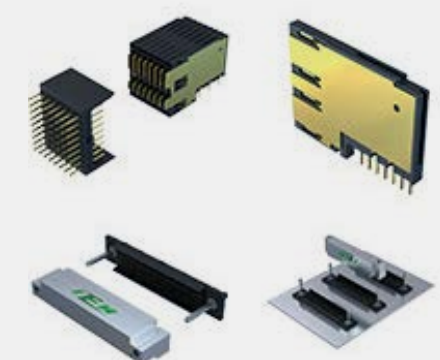

MICROPOL

www.micropol.com

COMPANY OVERVIEW

Micropol manufactures and supplies cable systems with rugged, high-quality field cables that can cope with extreme temperatures. Lengths range from a few decimeters to up to several kilometers. We offer different types of expanded beam connectors, both for single-mode and multimode. Take for example our Falcon connector which is used for harsh military and aerospace environments. They are all hermaphroditic, and always connect correctly without any adapter needed.

• The Smallest and Lowest Loss Expanded Beam Connector On The Market - Falcon



- FALCON Mini 1–4 channels, Junior 1-12 channels, Senior 1-16 channels
- Insertion loss < 1.2 dB vs Nato standard < 2.5 dB
- Operating temperature -57 to +85°C, +100°C optional.
- Single Mode/Multi Mode
- Hermaphroditic
- IP67
- In accordance with MIL-DTL-83526/20&21


MECHANICAL

Coupling Type: Hermaphroditic
Compliant: 650 - 1650 nm
Material: Hard anodized aluminum
Alternative Material: Marine bronze & stainless steel
Colour: Gray
Durability: 3000 mating cycles
Free Fall: 500 falls from 1,2 meters height
Vibration: 5-500Hz, 0,75mm amplitude at 10 g
Shaking: 390 m/S numbers of shakes 3x4000
Shock Pulse Length: 11ms, half sine at 35g Numbers of axis: 3 (x, y, z)

ENVIRONMENTAL


Operating Temperature: -550C to +850C, +1000C optional
Water Immersion: 10 m water depth-mated
Air Pressure : <25kPa -550C during 4h
Corrosion Resistance: 500h salt spray
Flammability: DOD-STD-1678, method 5010

• Cable Reel

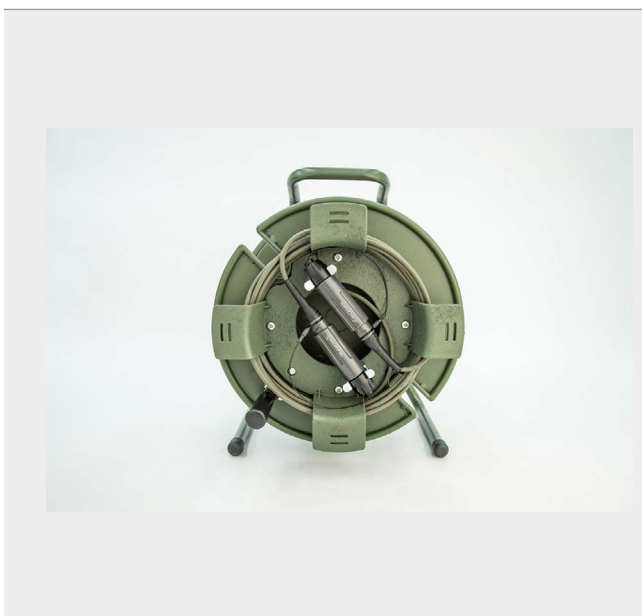

- 1–16 fiber
- Mounted on cable reel
- Split with fanout cable
- Insertion loss < 1,2 dB
- Connector size: mini, junior, senior
- 15 000 000 bendings at 30 mm radius
- Operational temperature range from -400C to +850C
- Standard configuration up to 500 meters (can be adjusted according to specifications)

• Backpack Cable Drum

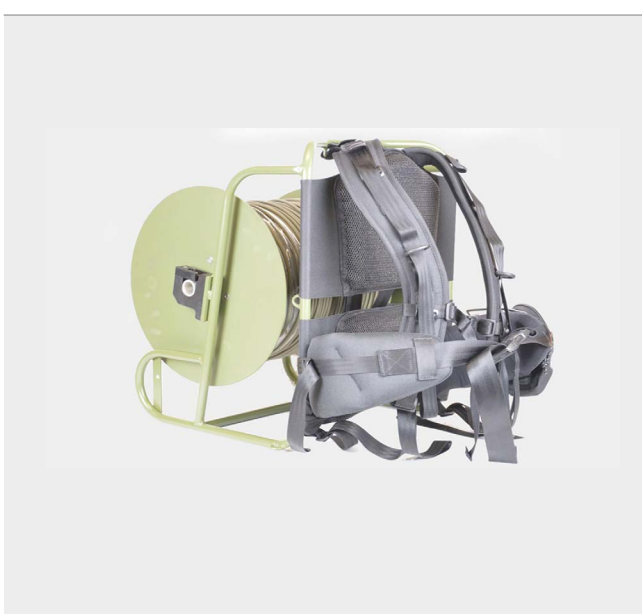

• Cable




- For heavy duty use
- 1–384 fiber
- Operating temperatur -55°C to +85°C
- Vertical installation
- High flex, up to 15 million bends
- Rodent resistant

• MIL-PATCHCORD




- Operating temperature -55 to +85°C
- Connectors with metal outer body
- Cut resistant
- Higher spring load
- Standard and Tailor-made

• **Test Kits**

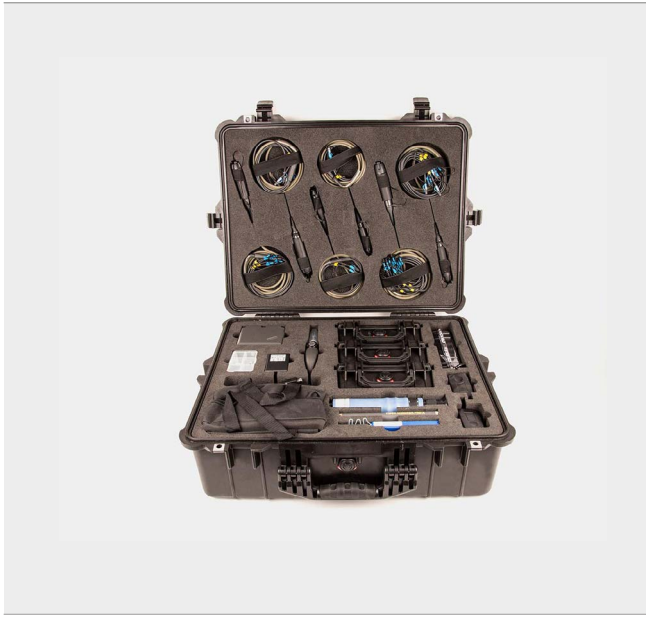

• **Cable Monitor**

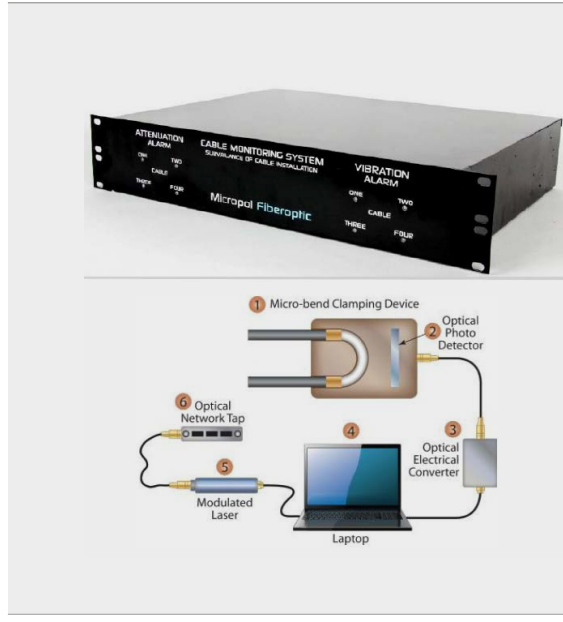

Prevents information tapping, detects cable cut off and cable vibrations

- Detects cable cut-off
- Detects specific vibrations of the cable
- Detects specific vibrations of the cable

• **Distribution Frames, Pigtails, Patchcords**




- Insertion loss < 0.2dB
- Return Loss > -55 dB
- 2-384 fiber

• **ODF Boxes**



- Future proof
- Tailor-made
- Insertion loss < 0.2 dB
- Return loss > -55 dB (UPC)
- Return loss > -65 dB (APC)
- 2-384 fiber
- More fiber available on request

• **Fan Out**

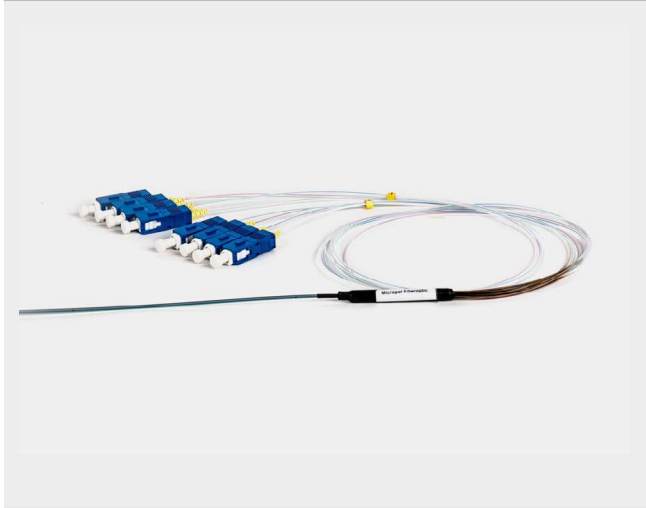

- Single mode/multi mode
- 2, 4, 8, 12, 16, 24 FIBER
- Standard lengths 1.6 or 2.4 m
- Customized lengths on request
- Rugged fanout
- Insertion loss < 0.2 dB
- Return loss > -55 dB (UPC), > -65 dB (APC)
- Available in S12 color coding

• **Attenuator**



- Metal ion doped fiber
- High-power light source durability
- Wavelength independence
- Attenuation levels ranging from 1 dB to 30 dB
- 1310 nm, 1550 nm, 1250-1625 nm and 1350/1550 nm dual wave lengths

• **MTP/MTO**



- Data center approved
- Insertion loss (reference cable) < 0.3 dB/channel
- Return loss > -65 dB (SM)
- High density 4-72 fiber
- MTP-MPO fanout
- MTP-MPO patch
- MTP-MPO jumper cable assembly

• **Custom Solutions**



EMI SOLUTIONS INC.

www.4emi.com

COMPANY OVERVIEW





Headquartered in our expanded facility in Irvine, California, our company was established in 1996 based on the development of our FlexFilter inserts for EMI filtering. Over the years, EMI Solutions has steadily grown by diversifying our product offering to meet our customer's needs.

Flexfilter Inserts

MIL-CIRCULAR

D-SUB

ARINC

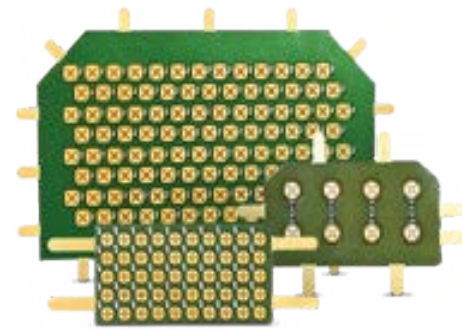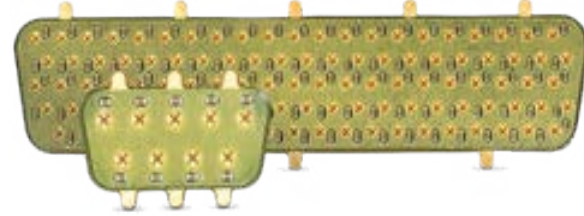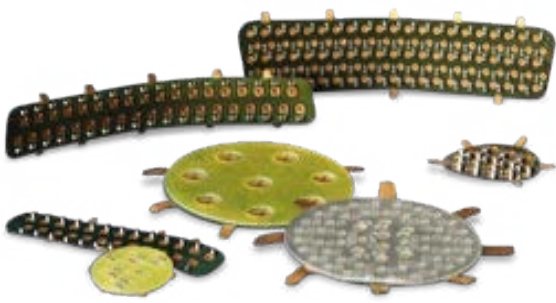

Meets requirements for:

DO-160

MIL-STD 461

MIL-STD 810G

- ◆ Quick turn
- ◆ Cost effective
- ◆ High Reliability
- ◆ Simple installation - configured to your existing connector
- ◆ Suited for High Voltage and Severe Environments
- ◆ Select Components (Caps, Resistors, Diodes and more) on a pin by pin basis

Filtered MIL-Circular Connectors



Designs for all Mil-Circular Connectors including:

D38999

M26462

M5015

Pi Filters

- ◆ Highest Performance with minimal resonance Insertion Loss of 70 – 80 dB
- ◆ Limited number of available capacitances and variations


Planar Arrays or Discoidal Capacitors

- ◆ Very good broadband performance
- ◆ Insertion loss of 50 – 60 dB
- ◆ Can be combined with Inductors (L) for improved performance

Chip Capacitor

- ◆ Good for “notch” type filtering
- ◆ Reduced higher frequency performance due to chip cap resonance
- ◆ Insertion Loss of 40 - 45 dB
- ◆ Wide variety of capacitances and variations available

● Filtered D-Sub Connectors

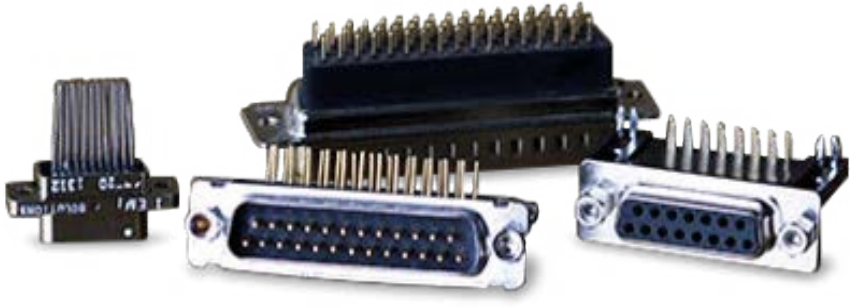

Designs for all Mil Spec D-Sub Connectors:

MIL-24308

MIL-83513


C & Pi Filters

- ◆ Highest Filter Performance with Minimal Resonance
- ◆ Insertion Loss of 70 - 80 dB
- ◆ Limited number of available capacitances and variations


Chip Capacitor

- ◆ Good for "notch" type filtering
- ◆ Reduced higher frequency performance due to chip cap resonance
- ◆ Insertion Loss of 40 - 45 dB
- ◆ Wide variety of capacitances and variations available


● Chip Capacitor Filter Performance

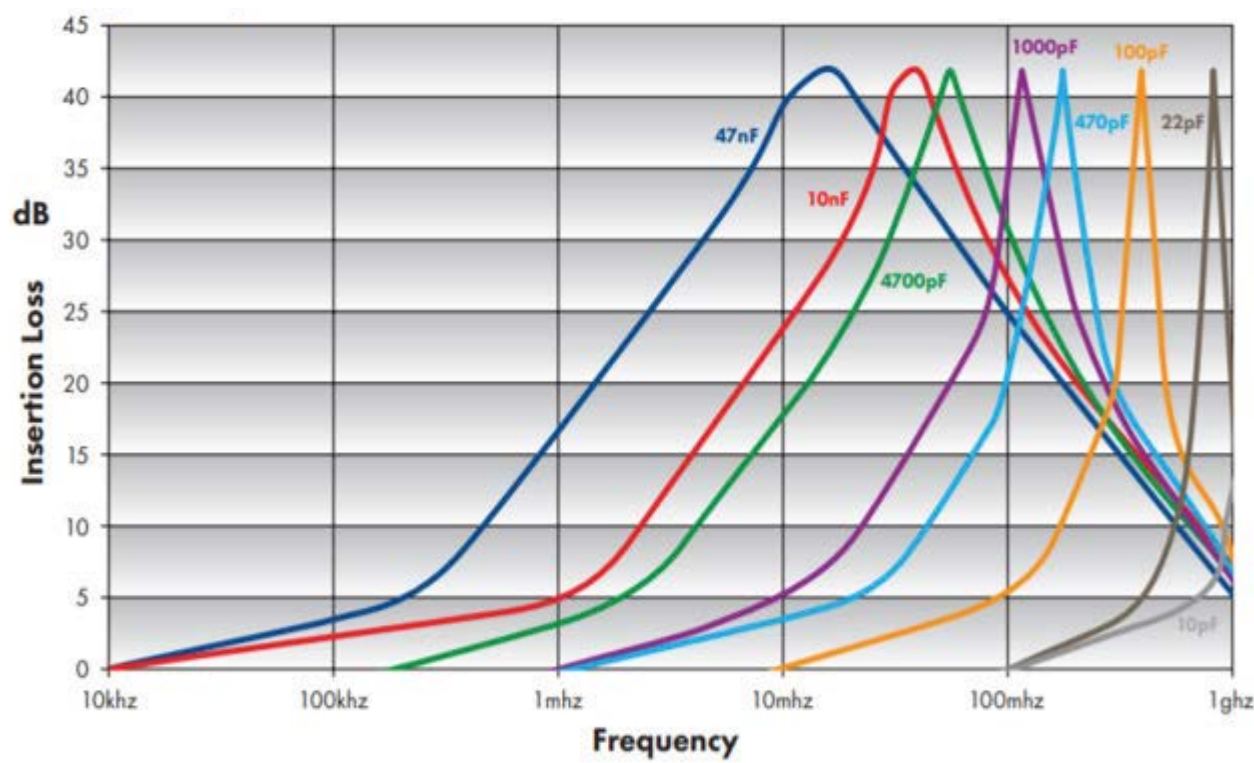

● Filtered Connector Performance

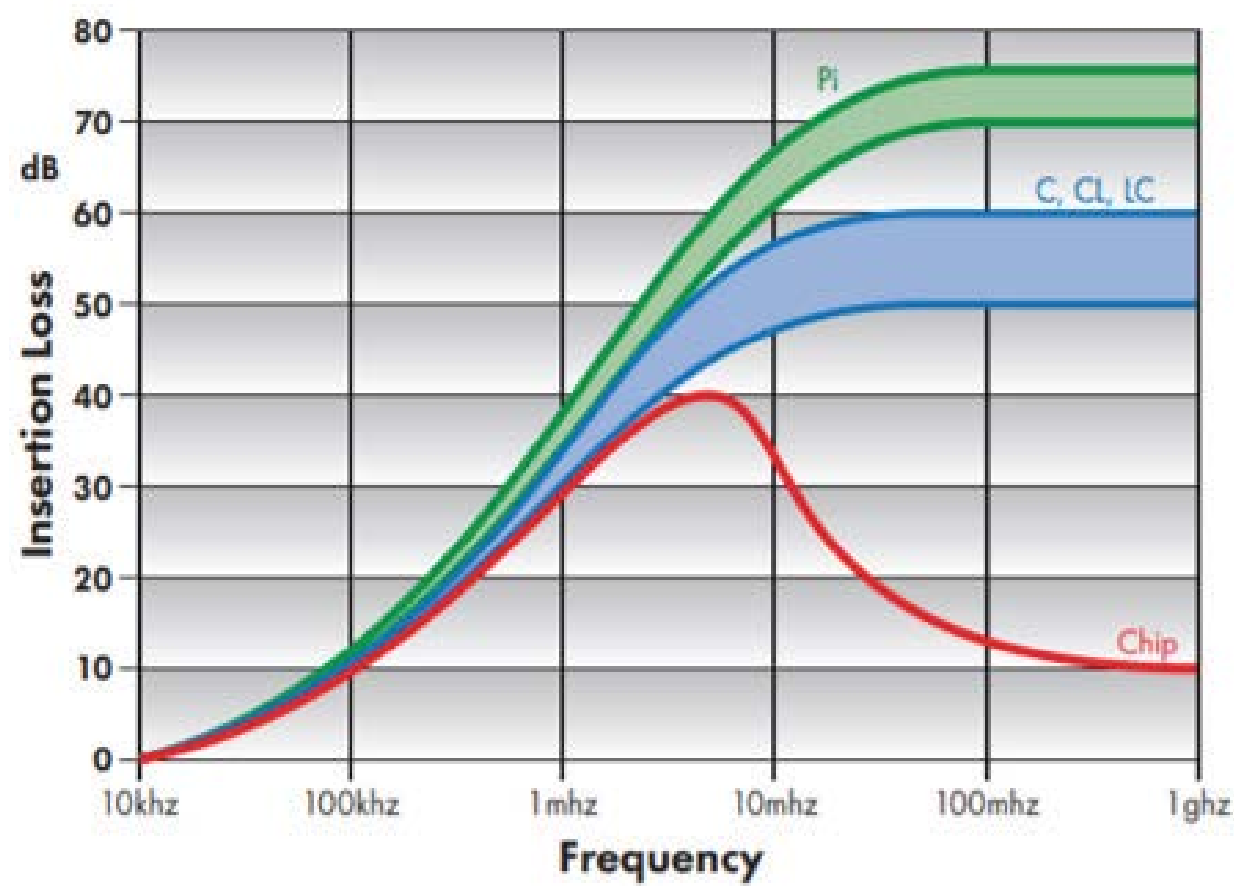

	Capacitance Options	Filter Performance
Pi with Planar Arrays	100 pF – 1 uF+	70+ dB
Pi Tubes	47 pF – 12,000 pF	70+ dB
Discoidal Capacitor (C)	470 pF – 40,000 pF+	50 – 60 dB
Planar Array (CL & LC)	100 pF – 1 uF+	50 – 60 dB
Chip Capacitor	3 pF – 47,000 pF+	>40 dB

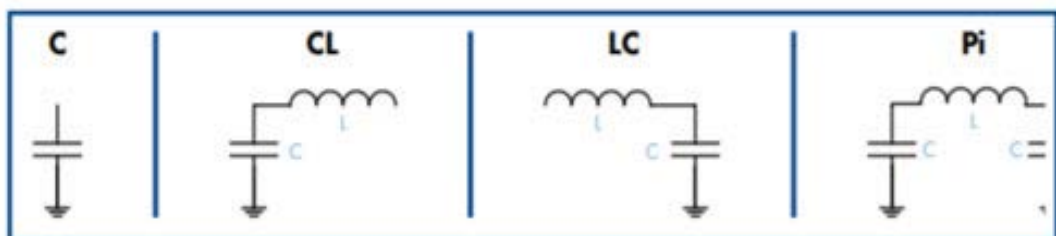

PI FILTERING

- Built with Pi Tubes, Discoidal or Planar Arrays
- Provides C-L-C Component Configuration
- Highest Performance: 70+ dB Insertion Loss
- Very Good High Frequency Performance

C, C-L OR L-C FILTERING

- Built with Chip Caps, Discoidals, Planars or C Tubes
- 45 - 60 dB Insertion Loss
- Good Broad Spectrum Filter Performance

CHIP CAPACITOR FILTERING

- 40+ dB Insertion Loss
- Quick Turn
- Lowest Cost Option
- Limited High Frequency Performance

● Termination Options



● Feed Thru Filters

- ◆ Solder in, Screw in, or Press in versions
- ◆ Ideal for RF Applications
- ◆ Circuit types: C, CL, LC, Pi
- ◆ Typical Capacitance: 1.0pF to 20,000+ pF
- ◆ Operating Temp: -55°C - +125°C
- ◆ Hermetic Seal option
- ◆ Various sizes and threads
- ◆ High Working Voltage Rating: 50-500V typical
- ◆ Custom versions available



AMC

www.a-m-c.com

COMPANY OVERVIEW

ADVANCED Motion Controls has earned a reputation for being the most flexible and affordable manufacturer of quality high performance and high power density servo drives. By selecting ADVANCED Motion Controls as your servo drive and controls supplier, you will be adding an integral member to your design engineering team with multi-industry expertise. 30+ years of servo drive manufacturing, with nearly 3 million servo axes built and shipped worldwide!



ANY NETWORK



We also have the ability to quickly produce custom DigiFlex® Performance™ drives utilizing many other common types of network communication.

ANY MOTOR

Three Phase (Brushless)

- ▶ Servo – BLDC, PMAC
- ▶ AC Induction (Closed loop vector)
- ▶ Closed loop stepper

Single Phase

- ▶ Brushed
- ▶ Voice coil
- ▶ Inductive load

ANY FEEDBACK

ABSOLUTE ENCODER

- ▶ EnDAT®
- ▶ Hiperface®
- ▶ BiSS®C – Mode

Tachometer

- ▶ ±10 Vdc
- ▶ ±60 Vdc

1 VP – P SIN/COS ENCODER

Aux. Incremental Encoder

INCREMENTAL ENCODER

±10 Vdc position

Resolver

Hall Sensors

ANY CONTROLLER

Digital or analog controllers

- ▶ ±10 Vdc
- ▶ PWM and Direction
- ▶ Step and Direction

Digital or analog controllers

- ▶ 0 – 5 V (Standard, Inverted or Wigwag)
- ▶ 0 – 5 kW (Standard, Inverted or Wigwag)

ANY ENVIRONMENT

Extreme Ambient Temperatures

- ▶ Standard products range from -40°C to +85°C
- ▶ Custom products operate down to -50°C and lower, and +100°C and higher!


Component Temperature Protection

- ▶ Ø PCB operating temperatures up to 105°C

• **ADVANCED Motion Controls Advantages:**


- Battery supplied, mobile operation needing 8+ hours duty / 7-day standby capability
- ≥98% efficiency to extend overall battery life
- Multiple power demands
- Common control system dictated same servo drive interface but with models having different power levels
- Minimal maintenance
- Operation typically in remote locations
- Long service life expected

• **DigiFlex® Performance™ Servo Drives**

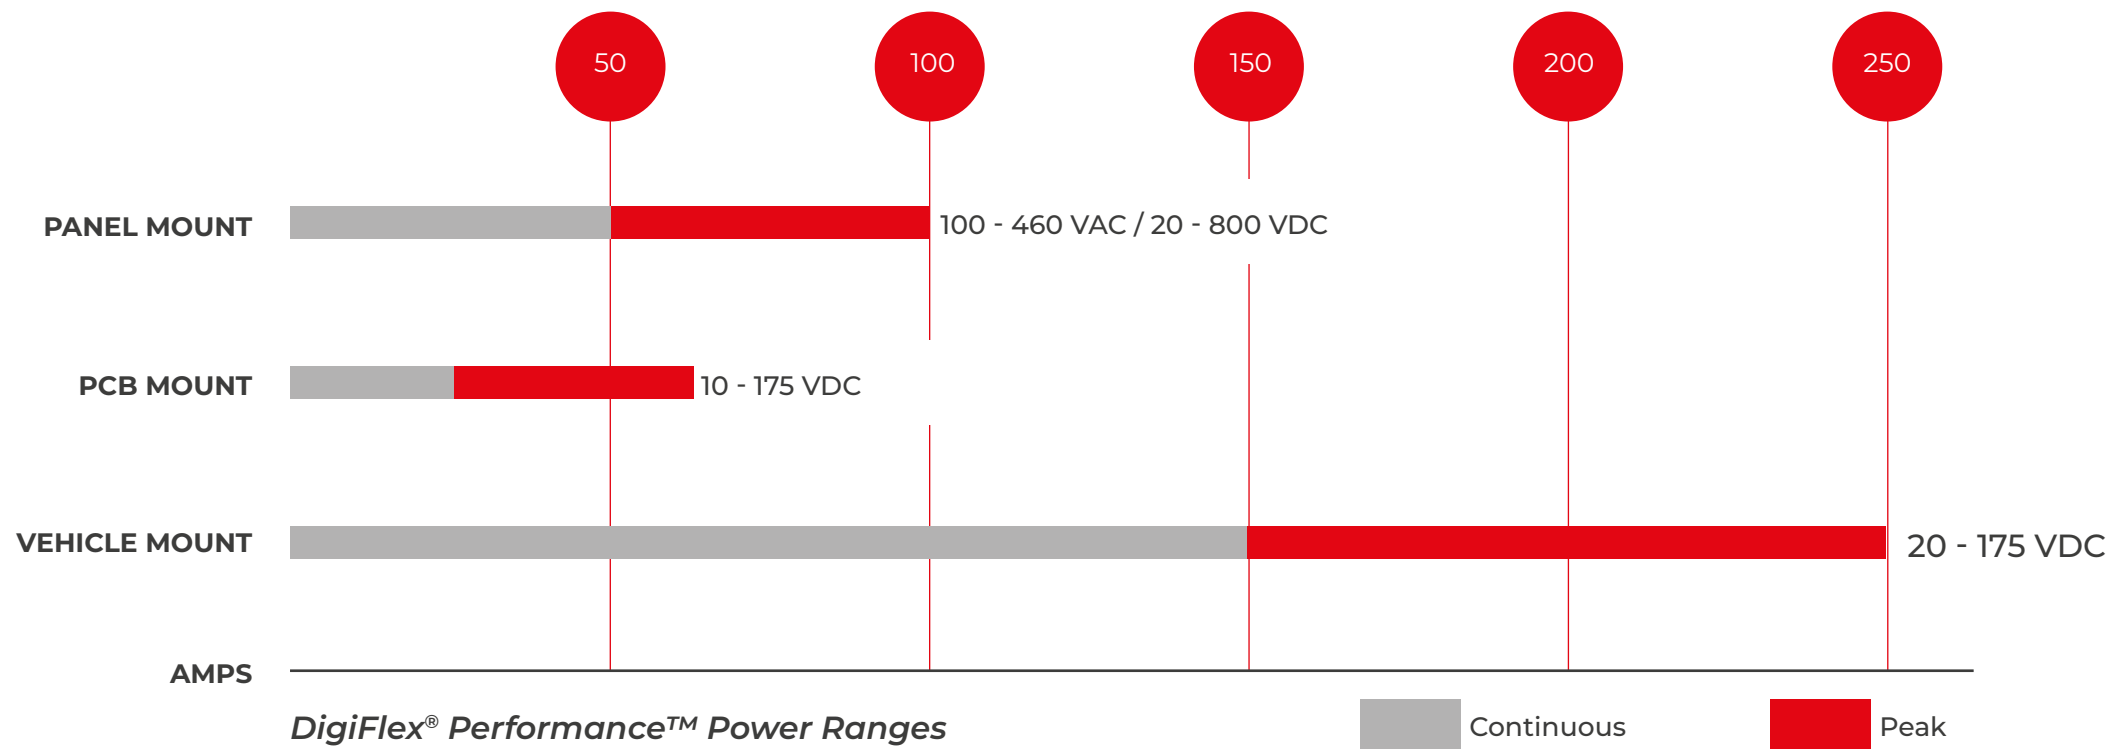

- Peak power output up to 27.4kW
- Three phase brushless (servo, closed loop vector, closed loop stepper)
- Single phase (brushed, voice coil, inductive load) motors
- Variety of feedback options - Absolute Encoder (EnDat®, Hiperface®, BiSS® C-Mode), Incremental Encoder, Hall Sensors, Resolver, 1Vp-p Sin/Cos Encoder, Tachometer
- Compatible with DriveLibrary™ - ADVANCED Motion Controls' API for C++ motion programming

• **AxCent™ Servo Drives**

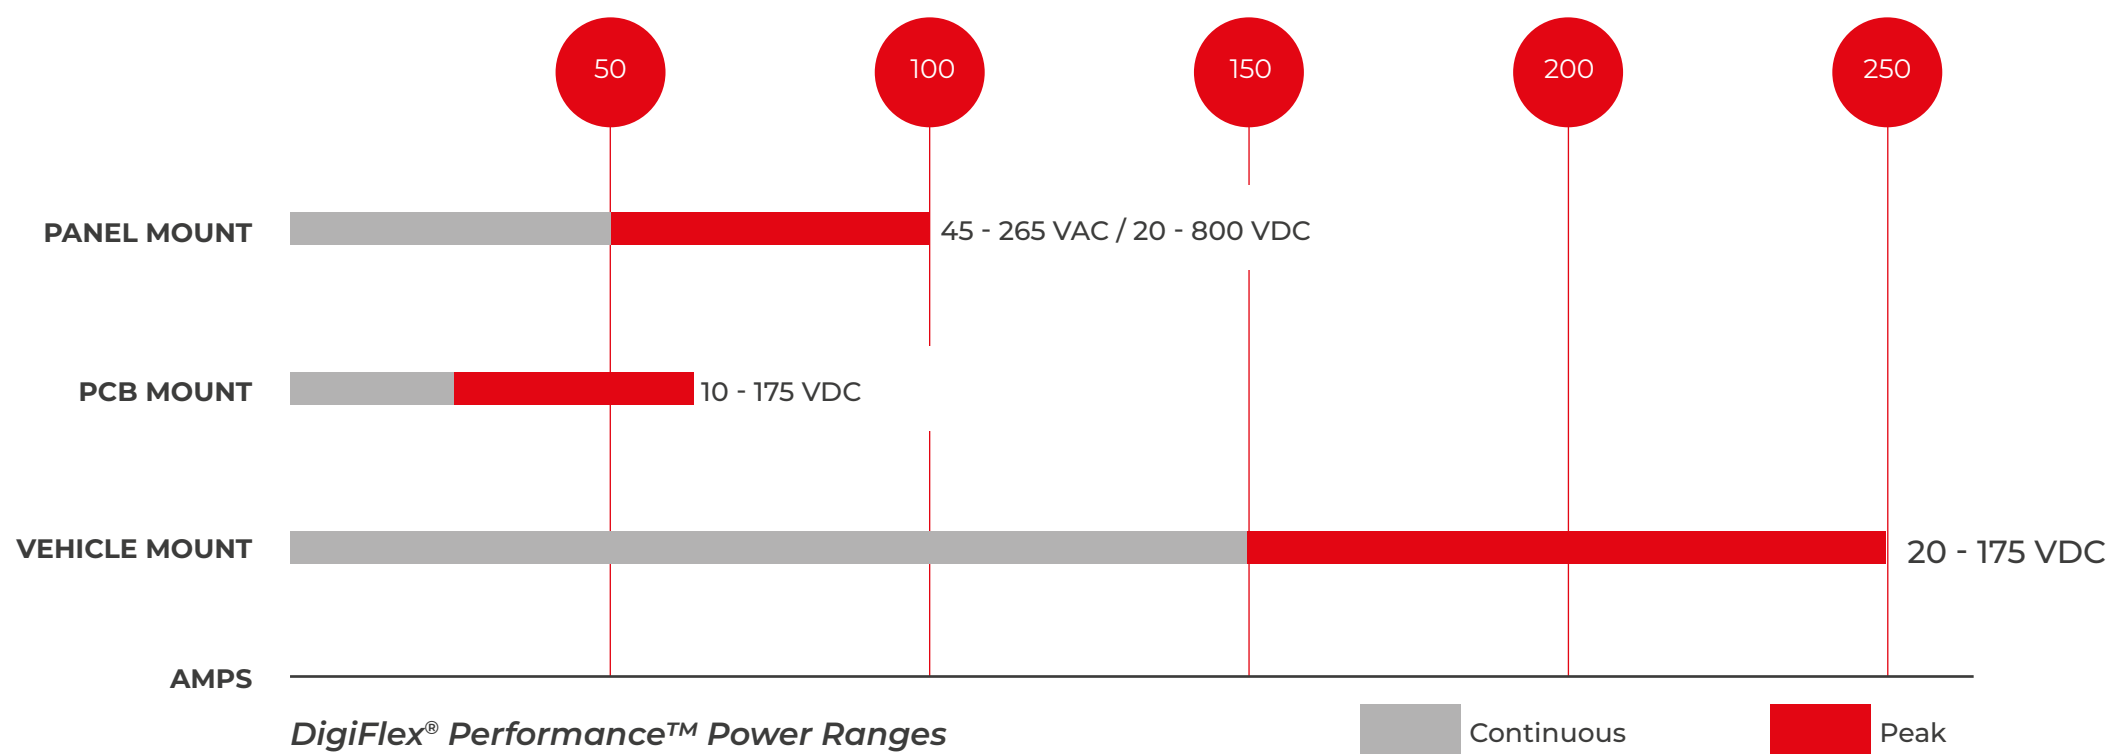

- Unparalleled benefits in both simplicity and performance,
- NOT require computer hardware or software,
- Higher bandwidth and faster response times at a lower cost,
- Including ±10V analog, PWM and Direction, and specialized electric vehicle commands,
- Optical isolation between high and low power signals standard on certain models
- Current, Velocity, and Fault Monitor analog output signals

• **Extended Environment products (AZX – DZX Series)**

ADVANCED Motion Controls' Extended Environment products are designed to operate under harsh thermal and mechanical extremes.

- Ambient operating temperatures from -40°C to 85°C
- Over Temperature up to 105°C
- Thermal rise cycling in about 2 minutes
- Shock up to 15g's at 11ms
- Vibration up to 30grms on all 3 axes
- Designed to assist system compliance toward: MIL-STD-810F: temperature, thermal shock, humidity, altitude, shock & vibration



COMPANY OVERVIEW

ICPE or Institutul de Cercetări Electrotehnice® was established over 65 years ago. The modern research infrastructure, obtained successfully following the performance of local and international projects, is a solid basis for further research in electrical engineering, and related fields.

DC BRUSHED TORQUE MOTORS

DC Torque Motors operate on the same principles as the conventional DC motors but the magnetic circuit design and consequent mechanical configuration are designed for maximum torque output rather than the usual low torque / high speed characteristic. Arrange of unhused units which are supplied as three separate components, a permanent magnet field assembly, a wound armature with precision bore for mounting and a brush ring assembly or brush segments.

Fixed element – the stator, is equipped with rare earth permanent magnets and the rotor is equipped with a dc specific winding which is connected to an extra flat commutator – brushed system. Low speed Torque Motors are beneficial for direct-drive applications. Position and velocity feedback can be achieved via additions of DC Tachos, Resolvers or Optical Encoders. The unhused motors described below can be offered in custom designed housings for specific applications.



PRODUCT CODE	PEAK TORQUE [mNm]	TORQUE SENSITIVITY [mNm/A]	MOTOR CONSTANT [mNm/W]	OUTSIDE DIAMETER [mm]	HEIGHT [mm]
TQRB-15-0.39	77.7	25,1	10,3	38,10	9,78
TQRB-15-0.51	127	36,3	13,9	38,10	12,95
TQRB-15-0.51-B	141	32,4	16	38,10	12,95
TQRB-15-1.03	333	83,2	39,2	38,10	26,00
TQRB-15-1.1	353	50,4	28,3	38,10	27,94
TQRB-20-1.14	1200	150	86,6	51,00	29,00
TQRB-24-1-C	600	195	68,2	60,32	25,40
TQRB-30-0.78	777	256	87,4	76,20	19,80
TQRB-34-0.51	883	160	74,1	85,725	12,95
TQRB-34-0.95-A	2048	438	195	85,725	24,40
TQRB-34-1.46	3140	551	271	85,725	36,90
TQRB-37-0.54	1060	210	85,4	92,075	13,72
TQRB-37-0.54-B	1060	158	85,4	92,075	13,72
TQRB-37-0.84	2120	358	156	92,075	21,33
TQRB-37-1.46	4000	681	341	92,456	37,008
TQRB-45-0.56	2300	340	146	114,3	14,22
TQRB-45-0.69-B	3250	542	238	114,3	17,45
TQRB-45-0.69-C	3250	963	238	114,3	17,45
TQRB-45-0.86	4590	715	277	114,3	21,84
TQRB-45-1.08	6510	838	401	114,3	27,28
TQRB-51-0.58	2825	251	180	130,175	14,73
TQRB-51-0.93	2800	1400	422	130,175	23,9
TQRB-51-1.0	4800	1200	490	130,175	25,5
TQRB-51-2.1	10000	1515	716	130,175	53,34

D.C. LIMITED ANGLE BRUSHLESS TORQUE MOTORS

Limited Angle Torque Motors are ideal for compact, limited angular excursion, rotary, closed loop servo applications. Operating in the system, these units endure a long storage life and a harsh thermal and mechanical environment. All motors consist of a housed stator with a high density winding around a steel core, molded in a special resin. The rotor is build from high-grade samarium cobalt magnets or neodymium, on a stainless steel core.

• **Advantages**

- No Torque Ripple
- High Angular Acceleration
- No Commutation
- Brushless
- Low Profile



AC SERVO MOTORS – BSM SERIES

BSM Series motors are available with high energy Nd-Fe-B magnets - 6 (six) magnetic poles - F Class Insulation - standard feedback system with resolver - winding protection with PTC - Standard protective structure is IP55 class - torque range from 0.1 to 20 Nm - high torque to weight ratios - superior low speed performance - very low inertia.

In this motor range below options are also available:

- Shaft with keyway according to DIN 6885
- Fail safe brake 24 VDC,
- Shaft seal ring,
- Additional feedback systems (encoder),
- Protection class IP65,
- Custom windings,
- Special dimensions and configurations.



SINUSOIDAL OUTPUT TRANSDUCERS – RESOLVERS

Resolvers which are directly supplied on the rotor winding, used on either limited angle, case in which they are supplied by means of flexible cables or on 360 degrees and, in this case, they are supplied through some collecting rings, as well as resolvers supplied by means of rotary transformer with a constant transformation ratio and the input and output winding terminals on the stator.

Advantages

- Used as an absolute angle transducer,
- Resistance to mechanical stresses,
- Operation within a wide temperature range.



OUTER ROTOR BRUSHLESS MOTOR

PARAMETER	SYMBOL	UNITS	VALUE
Nominal Torque	M_n	Nm	9
Peak Torque	M_{max}	Nm	27
Motor Constant	K_M	N/W	1,4
Voltage	V_{DC}	V	600
Nominal Current	I_n	A	8,3
Torque Constant	K_T	Nm/A _{ms}	1,08
Back EMF Constant	K_E	V _{ms} /krpm	67
No-Load Speed		rpm	7000
Number of Poles	N_p		10
Phase Connection			Y
Line-to-Line Resistance	R_L	Ω	0,4
Line-to-Line Inductance	L_L	mH	5,3
Electric Time Constant	T_E	ms	13,2
Insulation Class			H
Thermal Resistance	T_R	$^{\circ}C/W$	1,7
External Diameter	OD	mm	170
Stator/Rotor Length	L	mm	28
Motor Length	TL	mm	55
Inertia	J	kg cm ²	105
Weight	Wt	kg	4,2

The stator is a laminated steel core with a three phase windings. The high energy permanent magnets outer rotor configuration provides a more rigid structure for the permanent magnets and has higher inertia.

Advantages

- High torque due to large air gap radius,
- Stable low speed performance without feedback,
- Lower audible noise with reduced cogging.

Other Product Groups

As the company is established to customize different electrical machines there are many different products that ICPE can offer as following:

- Flat brushless servo motors,
- Precision small brushless motors,
- AC servo motors,
- Linear motors,
- Electric generators,
- 2-D robot tables.



NANOMOTION

www.nanomotion.com

COMPANY OVERVIEW

In 2005, Johnson Electric acquired Nanomotion Ltd to compliment its product line of dc motors with high precision piezo ceramic motors. Based on the principles of piezoelectricity, Nanomotion has designed a series of ultrasonic motors that have no moving parts and that have no extrinsic or intrinsic magnetic fields. In stall mode, the motors have no electrostatic fields as well. Furthermore, Nanomotion also designs and manufactures application specific motors for high volume applications that suit a wide range of micro mechanic specifications.

• Edge Motor

Nanomotion's Edge motor is the smallest industrial motor of its kind available in the marketplace today. Providing unlimited linear or rotary motion, the Edge motor offers extensive opportunities in applications that suit a wide range of industries. The Edge motor works with a uniquely designed, compact ASIC-based driver, and can be operated with any servo controller.



Features

- ◆ Extremely small dimensions
- ◆ Low power consumption
- ◆ ASIC drive and control
- ◆ Wide dynamic velocity range
- ◆ Motor weight of 0.55g
- ◆ Excellent move and settle characteristics
- ◆ Inherent brake at power off

MOTOR PERFORMANCE SPECIFICATIONS

	max velocity (mm/sec)	dynamic stall force (mN)	static hold force (mN)	static stiffness (N/μ)	preload on stage (N)	Kf Force constant (mn/volt commanded)	kv force (N · sec/m)
EMI-S-0	120	300	310	.075	1.8	30.5	1.6
EMI-V-0	120	300	310	.075	1.8	30.5	1.6

Note: All motor performance data is based on using Nanomotion ceramic motors and amplifiers

ENVIRONMENTAL

- ◆ Maximum Velocity: 120 [mm/sec]
- ◆ Dynamic Stall Force: 300 [mN]
- ◆ Static Holding Force: 300 to 320 [mN] (reference value)
- ◆ Nominal Preload on Stage: 1.65 to 2.0 [N]
- ◆ 40.6 mN/VoH command with AB1 driver (+/-15% tolerance)
- ◆ Kf: 30.5 mN/VoH command with AB5 driver (+/-15% tolerance)
- ◆ Non-energized Stiffness: 0.06 to 0.09 [N/μ]
- ◆ Kfv: -1.6307 Nsec/m
- ◆ Offset: 2-3 [V] (driver dependent) Attainable
- ◆ Resolution: better than 100 nm
- ◆ Nominal Lifetime: 20,000 hours under nominal operating conditions






DIAMOND SYSTEMS

www.diamondsystems.com

COMPANY OVERVIEW


This guide presents a sample of our current standard product offerings. We welcome the opportunity to serve you with one of these products or a custom solution based on our vast library of technologies and our worldwide design and manufacturing resources.

Nvidia Solutions

	FLOYD	ZIGGY	JETHRO	STEVIE	ELTON
					
Jetson Module	Nano&Xavier NX	TX2/TX2i	TX2/TX2i	AGX Xavier	AGX Xavier
Camera	3x CSI-2 4-lane ports	N/A	2x CSI 4-lane	8x CSI 2-lane	8x CSI 2-lane
Display	2x HDMI	1x HDMI	1x HDMI	2x HDMI	1x HDMI, 1x LVDS
Mass Storage	mPCIe M.2 NVME 2280 Micro SD	Micro SD	M.2 SATA 2242 Micro SD	M.2 PCIe x4 NVMe 2280	M.2 PCIe x4 NVMe 2242
Serial Ports	2x RS-232/422/485	2x RS-232	2x RS-232	2x RS-232	2x RS-232
USB	1x USB 3.0 2x USB 2.0	1x USB 3.0 1x USB 2.0	N/A	1x USB 3.0 2x USB 2.0	2x USB 3.0 2x USB 2.0
Ethernet	2x GbE with PoE	1x GbE	1x GbE	2x GbE	2x GbE
CAN	1	N/A	N/A	2	2
Integrated GPIO	8	13	13	13	13
Integrated DAQ	N/A	6x 12-16-bit A/D 2x 12-bit D/A	6x 12-16-bit A/D 2x 12-bit D/A	6x 12-16-bit A/D 2x 12-bit D/A	6x 12-16-bit A/D 2x 12-bit D/A
Expansion	1x PCIe/USB MiniCard	N/A	1x PCIe/USB MiniCard SkyWire Modem Socket	1x PCIe/USB MiniCard	1x PCIe/USB MiniCard SkyWire Modem Socket 1x PCIe x8 4x PCIe x1 PCI Bus Links
Size	143x76 mm	63x67x96 mm	76x107 mm	100x87 mm	102x152 mm



EPSM-10GX4

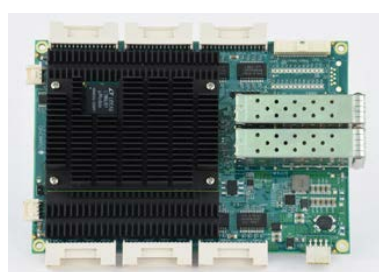

EPS-24G4X



EPS-12G2



EPS-12000-CM



EPS-8100

PRODUCT	DESCRIPTION	COPPER PORTS	FIBER PORTS	FORM FACTOR	DIMENSIONS	NOTES
EPS-8100	Layer 2+ managed 8-Port Gigabit Ethernet switch	8	x	PC/104	90mm x 96mm	Industry-leading rugged compact switch for vehicle applications
EPS-12G2	Layer 2+ managed 12-Port Gigabit Ethernet Switch	12	2x1G/2.5G	COM Express	95mm x 125mm	Economical 12 port rugged switch with dual fiber backbone capability
EPS-12G1	Layer 2+ managed 12-Port Gigabit Ethernet Switch	12	1x1G/2.5G	COM Express	95mm x 125mm	Economical 12 port rugged switch with fiber uplink
EPS-12G0	Layer 2+ managed 12-Port Gigabit Ethernet Switch	12	x	COM Express	95mm x 125mm	Economical 12-port rugged switch

EPS-12G0	Layer 2+ managed 12-Port Gigabit Ethernet Switch	12	x	COM Express	95mm x 125mm	Economical 12-port rugged switch
EPS-12000-CM	Layer 2+ / Layer 3 managed 12-Port Gigabit Ethernet Switch	12	x	COM Express Mini	84mm x 55mm	Ultra-compact, rugged, IEEE-1588 capable
EPS-24016-104	Layer 2+ managed 16-Port Gigabit Ethernet switch	16	x	PC/104	90mm x 96mm	High port density, rugged design
EPS-24026-104	Layer 2+ managed 26-Port Gigabit Ethernet switch	24	2x1G/2.5G	PC/104	90mm x 96mm	High port density, rugged design
EPSM-10GX4	Layer 2+ / Layer 3 managed 28-Port Gigabit Ethernet switch module	24	4 10G	COM Express Mini	84mm x 55mm	Switch module for custom solutions; Layer 3 and IEEE-1588 capability
EPS-24G4X	Layer 2+ / Layer 3 managed 28-Port Gigabit Ethernet Switch	24	4 10G	--	146mm x 102mm	Full featured switch, 10G Layer 3 and IEEE-1588 capability

● Rugged Systems

The SABRE family offers rugged mission computers and Ethernet switches for use in the most challenging vehicle environments. MIL-STD-461, 704, and 1275 compliance is available. Systems have been tested to MIL-STD-810G specifications up to 75G shock.

ETHERNET SWITCHES	SABRENET 12000	SABRENET 24000	SABRENET 24G2X
Copper ports	12x 1G	24x 1G	24x 1G
Fiber ports	N/A	N/A	2x 10G
Input voltage	6-34VDC	5-34VDC	5-34VDC
PTP option	Yes	Yes	Yes
Dimensions mm	162Wx137Dx66H	198Wx175Dx66H	198Wx175Dx66H



COMPUTERS	SABRECOM VNS	SABRECOM ARS	SABRECOM ZTA
Processor	Skylake 6th Gen Core i7 i7-6600U 2C 2.6GHz	Bay Trail E3845 2C 1.91GHz	Bay Trail E3845 Apollo Lake E3940/N4200
RAM	4-20GB	4GB	4-8GB
Mass storage	32-256GB SSD	32-256GB SSD	32-256GB SSD
Serial ports	4x RS-232/422/485	4x RS-232/422/485	4x RS-232/422/485
USB ports	4x USB 2.0, 2x USB 3.0	2x USB 2.0	4x USB 2.0, 1x USB 3.0
Ethernet	2x 10/100/1000	2x 10/100/1000	2x 10/100/1000
Integrated GPIO	16	16-24	16-24
Integrated data acquisition	N/A	16x 16-bit A/D 4x 16-bit D/A	16x 16-bit A/D 4x 16-bit D/A
Expansion	PCIe/104, PCI-104, and MiniCard sockets	PC/104-Plus: ISA & PCI 1x MiniCard	1x PCIe/USB MiniCard 1x M.2 SATA socket
Standard enclosure size	198W x 175D x 66H mm	198W x 175D x 66H mm	162W x 137D x 66H mm
Operating system support	Windows 10 IOT LTSC; Linux Ubuntu 16.04 LTS; 64-bit support	Windows 7/10; Linux Ubuntu 16.04 LTS; 32/64-bit support	Windows 7/10; Linux Ubuntu 16.04 LTS; 32/64-bit support

● I/O Expansion Modules

Diamond Systems offers a wide range of I/O modules in PC/104 and PCIe MiniCard form factors. Our analog and digital I/O modules are supported by our industry-leading Universal Driver software, consisting of a C language programming library along with example programs and GUI demos that provide instant verification of system operation. All products meet -40°C to +85°C operating temperature.

I/O Expansion Modules

Diamond Systems offers a wide range of I/O modules in PC/104 and PCIe MiniCard form factors. Our analog and digital I/O modules are supported by our industry-leading Universal Driver software, consisting of a C language programming library along with example programs and GUI demos that provide instant verification of system operation. All products meet -40°C to +85°C operating temperature.

ANALOG I/O														
Product	Form Factor	#A/D	Res	Max	Min	Gain	Max	Autocal	FIFO	#D/A	Res	Max	Min	GPIO
DMM-32DX-AT	PC/104	32 SE, 16 DI	16	±10V	0-625V	Program	250K	Auto	1024	4	16	±10V	0-5V	24 I/O
DMM-32X-AT	PC/104	32 SE, 16 DI	16	±10V	0-625V	Program	250K	Yes	1024	4	12	±10V	0-5V	24 I/O
DMM-16R-AT	PC/104	16SE, 8 DI	16	±10V	0-1.25V	Program	100K	Yes	512	4	12	±10V	0-5V	8 In, 8 Out
DMM-16RP-AT	PC/104-Plus	16SE, 8 DI	16	±10V	0-1.25V	Program	100K	Yes	512	4	12	±10V	0-5V	8 In, 8 Out
DMM-AT	PC/104	16SE, 8 DI	12	±10V	0-1.25V	Program	100K	Yes	512	2	12	±10V	0-5V	8 In, 8 Out
DMM-XT	PC/104	16SE, 8 DI	12	±10V	0-1.25V	Jumper	100K			2	12	0-5V	0-5V	8 In, 8 Out
DS-MPE-DAQ0804	MiniCard	8SE, 4 DI	16	±10V	0-5V	Program	100K		2048	4	16	0-5V	0-2.5V	14 I/O
RMM-1616A-XT	PC/104									16	16	Voltage ranges: ±10V, ±5V, 0-10V, 0-5V		48 I/O
RMM-816A-XT	PC/104									8	16			48 I/O
RMM-416A-XT	PC/104									4	16			48 I/O
RMM-1616AP-XT	PC/104-Plus									16	16	Current ranges: 0-20mA, 0-24mA, 4-20mA		48 I/O
RMM-816AP-XT	PC/104-Plus									8	16			48 I/O
RMM-416AP-XT	PC/104-Plus									4	16			48 I/O



DMM-32DX-AT




DMM-16RP-AT




RMM-1616AP-XT




GPIO-MM-XT

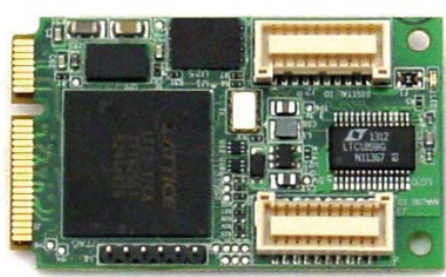


DS-MPE-DAQ0804

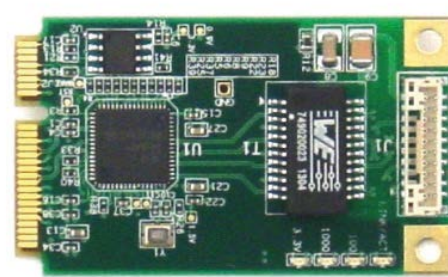

DS-MPE-GE210
Ethernet Minicard

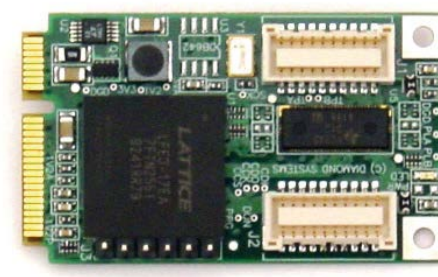

DS-MPE-GPIO

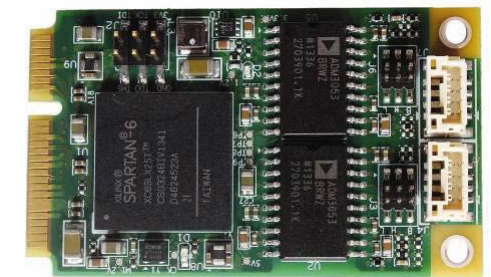


DS-MPE-CAN2L
Ethernet Minicard

DIGITAL I/O

Product	Form Factor	#GPIO	Voltage	Buffered	Direction	Opto	Relays	Load	Counters	Ctr Bits	Max Rate
OMM-XT	PC/104	48	5V		Programmable				3	16	10MHz
OMM-DIO-XT	PC/104	48	5V		Programmable						
GPIO-MM-XT	PC/104	100	5V	Yes	Programmable				10	16	10MHz
DS-MPE-GPIO	MiniCard	36	5V/3.3V	Yes	Programmable				8	32	50MHz
PMM-P	PC/104						16 SPDT	30VDC/2A			
OPMM-1616-XT	PC/104					16 In 3-30VDC	16 SPDT	30VDC/2A			
IR104-PBF	PC/104					20 In 3-24V	20 SPST	30VDC/5A			




EMM-8EL-XT



EMM-8P-XT




EMM-8PLUS-XT




EMM-4M-XT



EMM-OPT4-XT

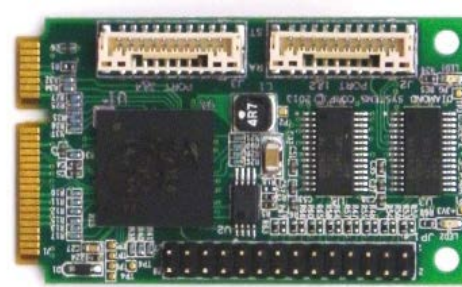

DS-MPE-SER4M

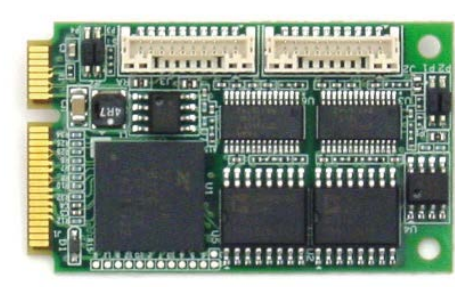

DS-MPE-OPT4232

SILICON POWER

www.silicon-power.com

COMPANY OVERVIEW

With over 16 years of experience, Silicon Power has become a trusted service-driven provider of professional NAND flash storage and DRAM modules for industrial and enterprise applications.

DDR4 DRAM MODULES

Model	SODIMM	UDIMM	ECC SODIMM	ECC UDIMM	ECC RDIMM
DRAM Type	DDR4	DDR4	DDR4	DDR4	DDR4
Capacity	2GB, 4GB, 8GB, 16GB, 32GB	4GB, 8GB, 16GB, 32GB	4GB, 8GB, 16GB, 32GB	4GB, 8GB, 16GB, 32GB	4GB, 8GB, 16GB
Data Rate	2400 / 2600 MHz	2400 / 2600 MHz	2400 / 2600 MHz	2400 / 2600 MHz	2400 / 2600 MHz
CAS Latency	CL17 / CL19	CL17 / CL19	CL17 / CL19	CL17 / CL19	CL17 / CL19
Voltage	1.2V	1.2V	1.2V	1.2V	1.2V
Pin Count	260 Pin	288 Pin	260 Pin	288 Pin	288 Pin
Data Width	64Bits	64Bits	72Bits	72Bits	72Bits
PCB Height	30.13 mm	31.40 mm	30.13 mm	31.40 mm	31.40 mm
Standard 0~85°C	Supported	Supported	Supported	Supported	Supported
Industrial -40~85°C	Supported	Supported	Supported	Supported	Supported
Storage -55~95°C	Supported	Supported	Supported	Supported	Supported

DDR3 DRAM MODULES

Model	SODIMM	UDIMM	ECC SODIMM	ECC UDIMM	ECC RDIMM
DRAM Type	DDR3L	DDR3L	DDR3L	DDR3L	DDR3L
Capacity	2GB, 4GB, 8GB	2GB, 4GB, 8GB	4GB, 8GB	4GB, 8GB	8GB
Data Rate	1600 MHz	1600 MHz	1600 MHz	1600 MHz	1600 MHz
CAS Latency	CL 11	CL 11	CL 11	CL 11	CL 11
Voltage	1.35V	1.35V	1.35V	1.35V	1.35V
Pin Count	204 Pin	240 Pin	204 Pin	240 Pin	240 Pin
Data Width	64Bits	64Bits	72Bits	72Bits	72Bits
PCB Height	30.50 mm	30.50 mm	30.50 mm	30.50 mm	30.50 mm
Standard 0~85°C	Supported	Supported	Supported	Supported	Supported
Industrial -40~85°C	Supported	Supported	Supported	Supported	Supported
Storage -55~95°C	Supported	Supported	Supported	Supported	Supported

SSDS

Form Factor	M.2	M.2	2.5"	2.5"	mSATA
Interface	PCIe Gen3, NVMe	SATA III	SATA III	IDE / PATA	SATA III
Capacity	64 GB - 2 TB	8 GB - 1 TB	8 GB - 4 TB	128 MB - 128 GB	8 GB - 1 TB
Supported Flash Types	3D TLC	SLC, MLC, 3D TLC	SLC, MLC, 3D TLC	SLC, MLC	SLC, MLC, 3D TLC
Industrial -40~85°C	Supported	Supported	Supported	Supported	Supported

FLASH CARDS

Form Factor	CFExpress	Compact Flash	SD	micro SD
Interface	Cfast 2.0	CF 6.0	SD 3.0	SD 3.0
Capacity	4 GB - 512 GB	128 MB - 256 GB	256 MB - 256 GB	256 MB - 256 GB
Supported Flash Types	SLC, MLC, 3D TLC	SLC, MLC	SLC, MLC, 3D TLC	SLC, MLC, 3D TLC
Industrial -40~85°C	Supported	Supported	Supported	Supported

Non-linearity		ppm	100/100/100/1000	100/100/100/1000	100
Bandwidth (-3dB)		Hz	214/214/257/214	208/262/257/261	262
Sample Rate	Max	Samples/s	2000	2000	2000
Group Delay	LP-filter -3bB=262Hz	ms	6,5/6,5/6,5/6,5	3,1/3/2,8/2,7	3
	LP-filter -3bB=131Hz	ms	8/8/8/8	4,6/4,5/4,3/4,2	4,5
	LP-filter -3bB=66Hz	ms	11/11/11/11	7,6/7,5/7,3/7,2	7,5
	LP-filter -3bB=33Hz	ms	17/17/17/13	14/13/13/13	13
	LP-filter -3bB=16Hz	ms	29/29/29/29	26/25/25/25	25
Bias 1 Year Stability		mg	0,8/1,5/4,5/15	1,5/1,5/4/12	1,5
Bias 1 Year Stability, STIM318e		mg		0,6/1,2/4/12	1,2
Bias Trim Offset Range		mg	NA	50/100/300/1000	100
Bias Error Over Temperature	≤ 1 °C/min	mg rms	1/2/6/20	0,5/0,7/1,5/5	0,7
Bias Instability	Allan variance @25°C	mg	0,03/0,05/0,15/0,5	0,002/0,003/0,01/0,03	0,003
Velocity Random Walk	Allan variance @25°C	m/s/√H	0,04/0,07/0,21/0,7	0,008/0,015/0,04/0,15	0,015
Orthogonality		± mrad	±0,2/0,2/0,6/1	±0,2/0,2/0,2/0,6	±0,2
Misalignment		± mrad	±1/1/1/1,5	±1/1/1/1,5	±1
Electrical / Mechanical					
Data Interface		Digital	RS-422	RS-422	RS-422
Initialization Time (valid data)		secs	≤ 1	≤ 1	≤ 5
Dimensions (max)		mm	44.8 x 38.6 x 21.5	44.8 x 38.6 x 21.5	44.8 x 38.6 x 21.5
Weight (max)		g	55	57	57
Power Consumption		Watts	≤ 2	≤ 2	≤ 2
Input Voltage		+VDC	+5 ± 10%	+5 ± 10%	+5 ± 10%
PPS input		kbps	No	No	Yes
Environment					
Temperature Operating		°C	-40 to +85	-40 to +85	-40 to +85
Shock Operating		g	--	--	--
Vibration Operating		g	8 grms 20-2000 Hz	8 grms 20-2000 Hz	8 grms 20-2000 Hz
Shock Survival		g	1500 g, 0.5 msec	1500 g, 0.5 msec	1500 g, 0.5 msec

NETZER

www.netzerprecision.com



COMPANY OVERVIEW

Electric Encoder™ Netzer's world-wide patented, rugged high performance Electric Encoder™ technology, suits a wide variety of applications ranging from space and avionics, through military and defense, to instrumentation and automotive. The product portfolio includes Rotary & Linear absolute or incremental position encoders, with analog or digital outputs.


The Non-contact, absolute-position relies on interaction between the measured displacement and an internally shielded, space/time modulated, electric field and offers features unsurpassed by traditional optical and magnetic encoders.

Advantages of Electrical Encoders

- Simple, robust structure with a virtually no-failure-mechanism,
- Very low weight, inertia, and profile ($\approx <10\text{mm}$),
- Ring shaped, hollow shaft with a wide range of diameters,
- Precision to 0.001° in selected models,
- Default operation range from -55°C to $+125^\circ\text{C}$,
- Insensitivity to EMI/RFI and magnetic fields,
- Ultra-high-speed options,
- Wide variety of position feedback protocols.
- The company has structured its product range based

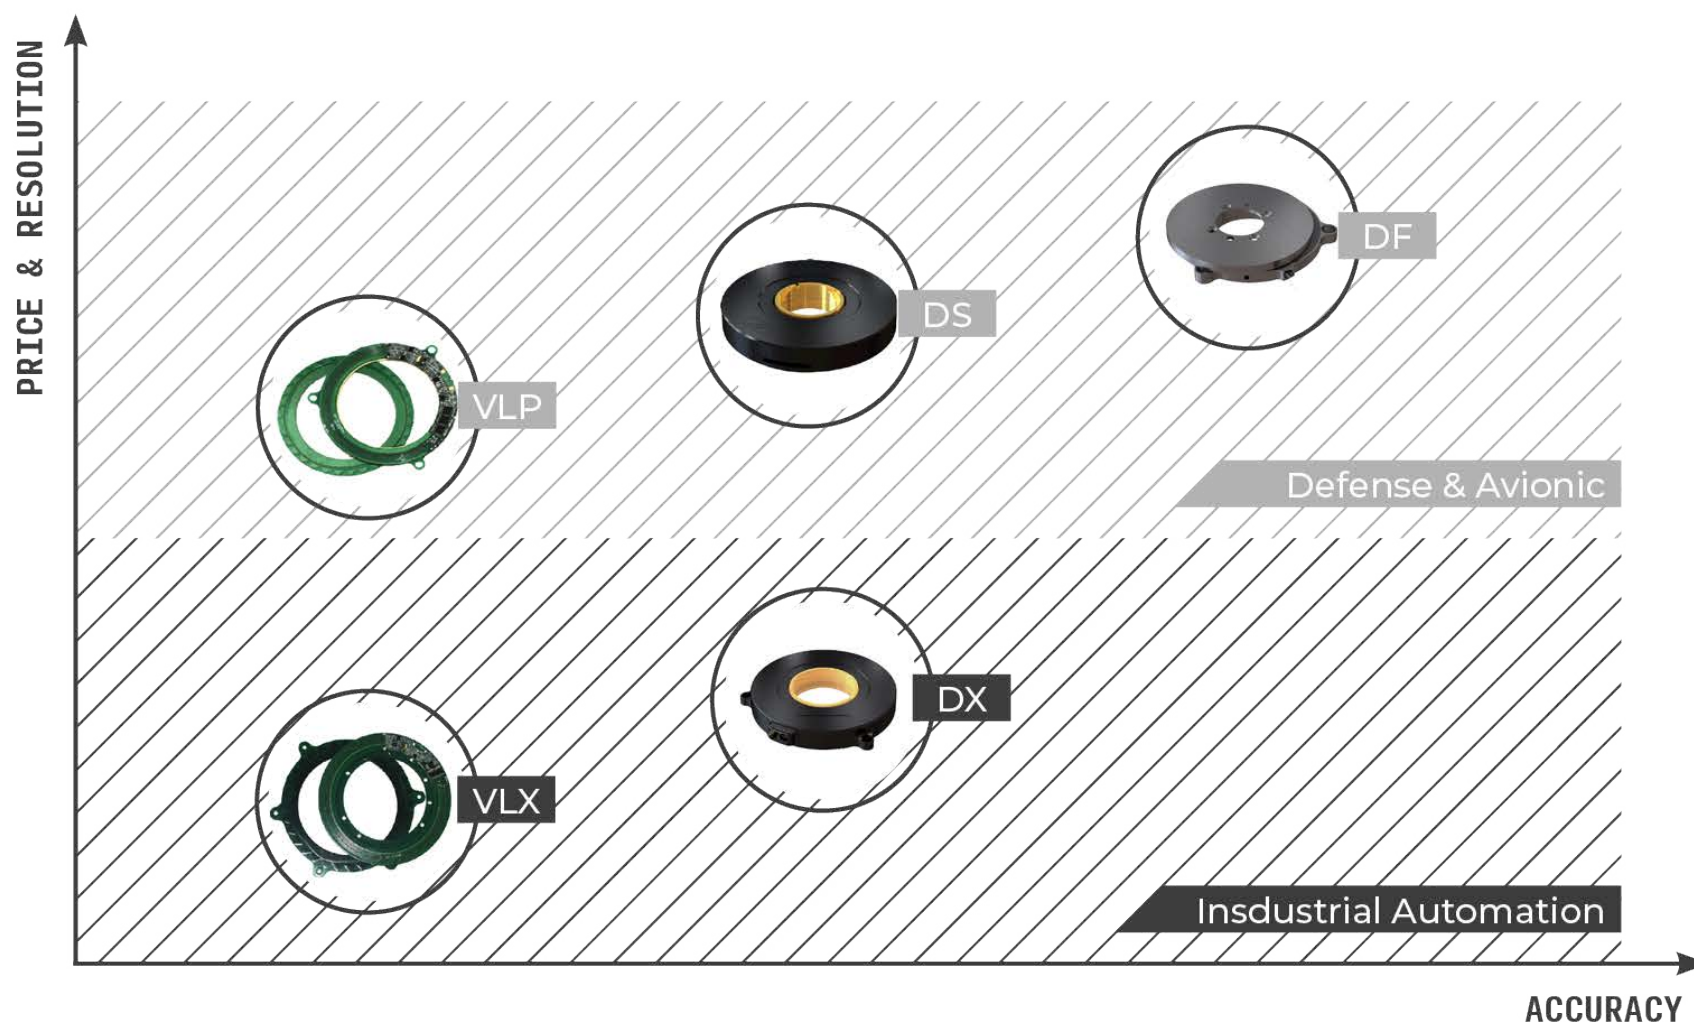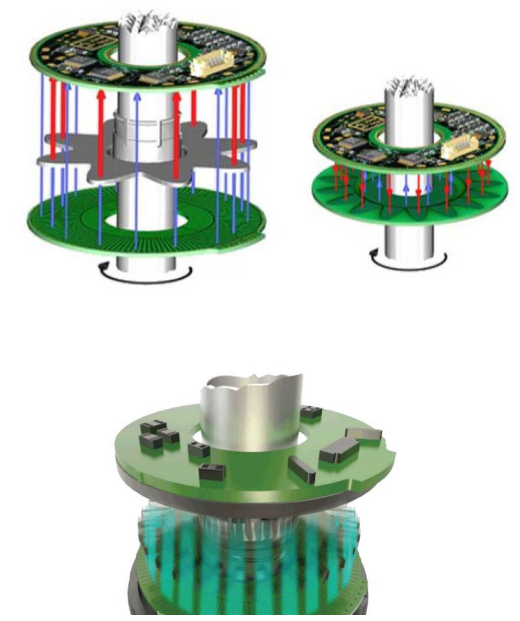


The company has structured its product range based on price performance criteria for different types of applications. For industrial applications DX and VLX products; for defense and avionic applications VLP, DS and DF products are available.

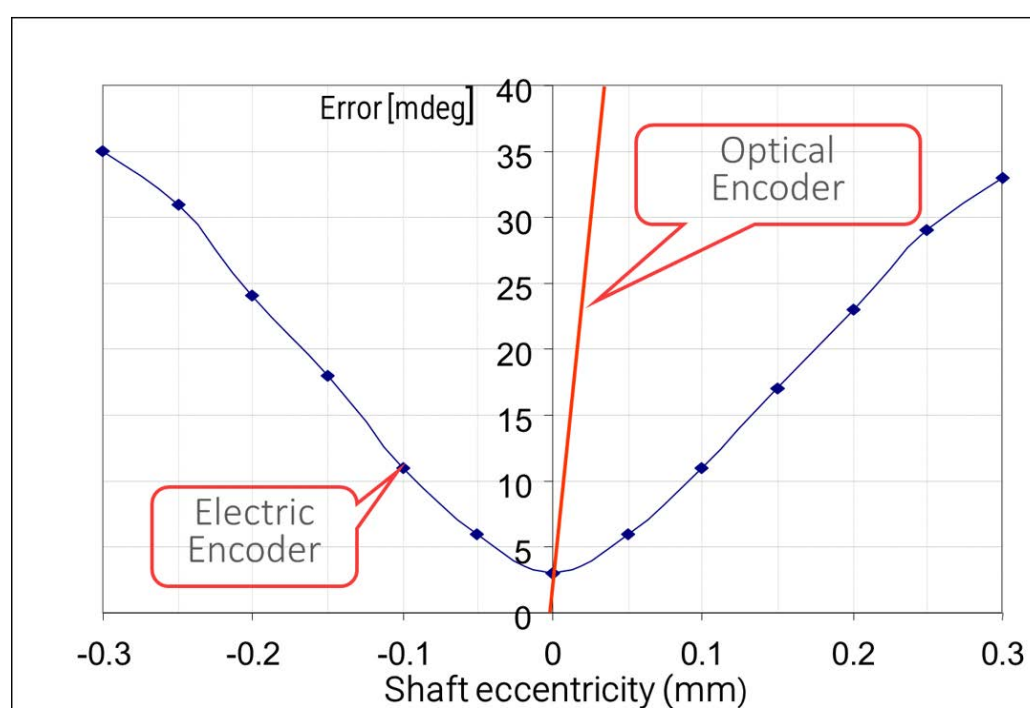

Netzer products are also verified with their high MTBF as shown in below diagram.

T (°C)	MTBF (HOURS)		
	GF (ground fixed)	GM (ground mobile)	SF (space flight)
25°	4,300,000	2,000,000	1,500,000
85°	450,000	300,000	750,000

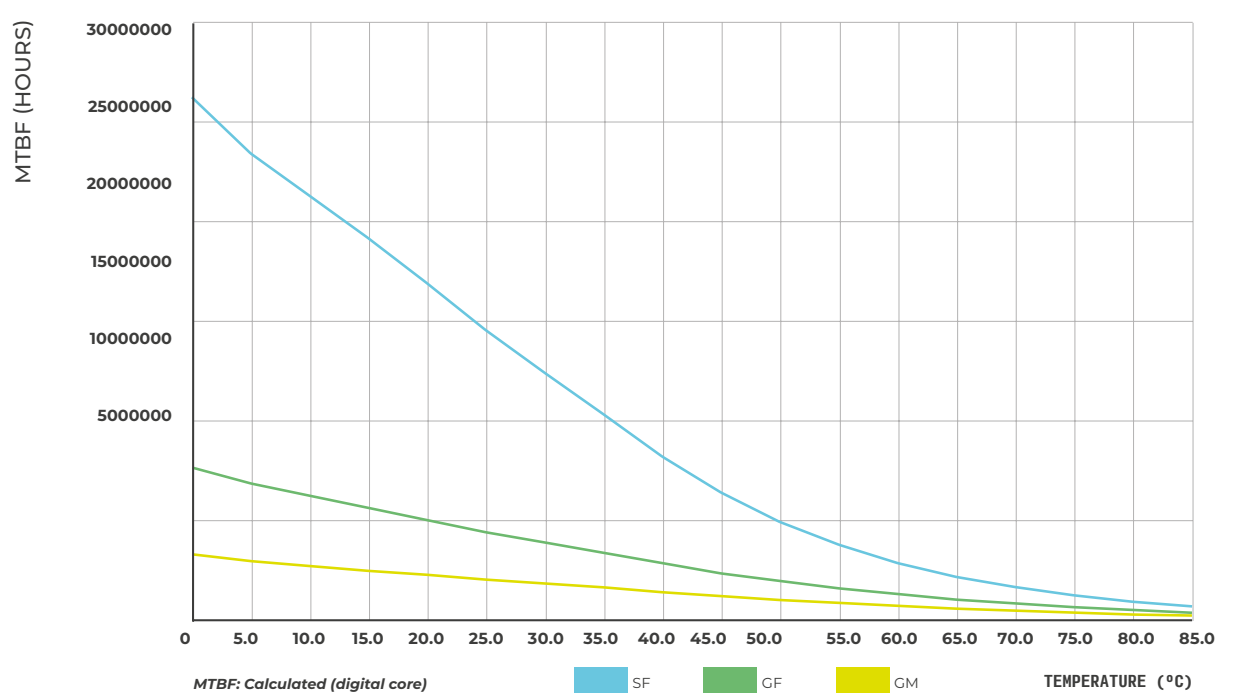



www.saccaeurope.com

info@saccaeurope.com

The Netherlands

Steenowenweg 5, 5708HN, **Helmond**

+31 492 218 972

Poland

Wspólna 70, Mazowieckie 00-687, **Warsaw**

+48 221 822 534