



**saca**  
— europe —

## stabilization (gimbal + turret)

Gimbals are mechanical devices that provide stabilization by counteracting unwanted movement and vibrations, allowing cameras, sensors, or other payloads to remain steady and level. Turrets, on the other hand, enable precise pointing, tracking, and stabilization of mounted equipment, such as weapons systems or surveillance tools. Whether used in military operations, or surveillance, stabilization technology has significantly improved the quality, accuracy, and effectiveness of capturing and tracking objects in motion.

## manufacturers

**SynQor**

**MOTIEN**  
TECHNOLOGIES

**Movella**  
Bringing meaning to movement

**OMNETICS**  
CONNECTOR CORPORATION

**TEH**

**MICROPOL**

**EMI**  
SOLUTIONS INC.

**ADVANCED**  
MOTION CONTROLS

**ICPE**

**PANLINIK**  
奔联技术

**NANOMOTION**  
A Johnson Electric Company


**DIAMOND**  
SYSTEMS

**Netzer**  
Precision Motion Systems Ltd.

**SECO**

**SEALEVEL**



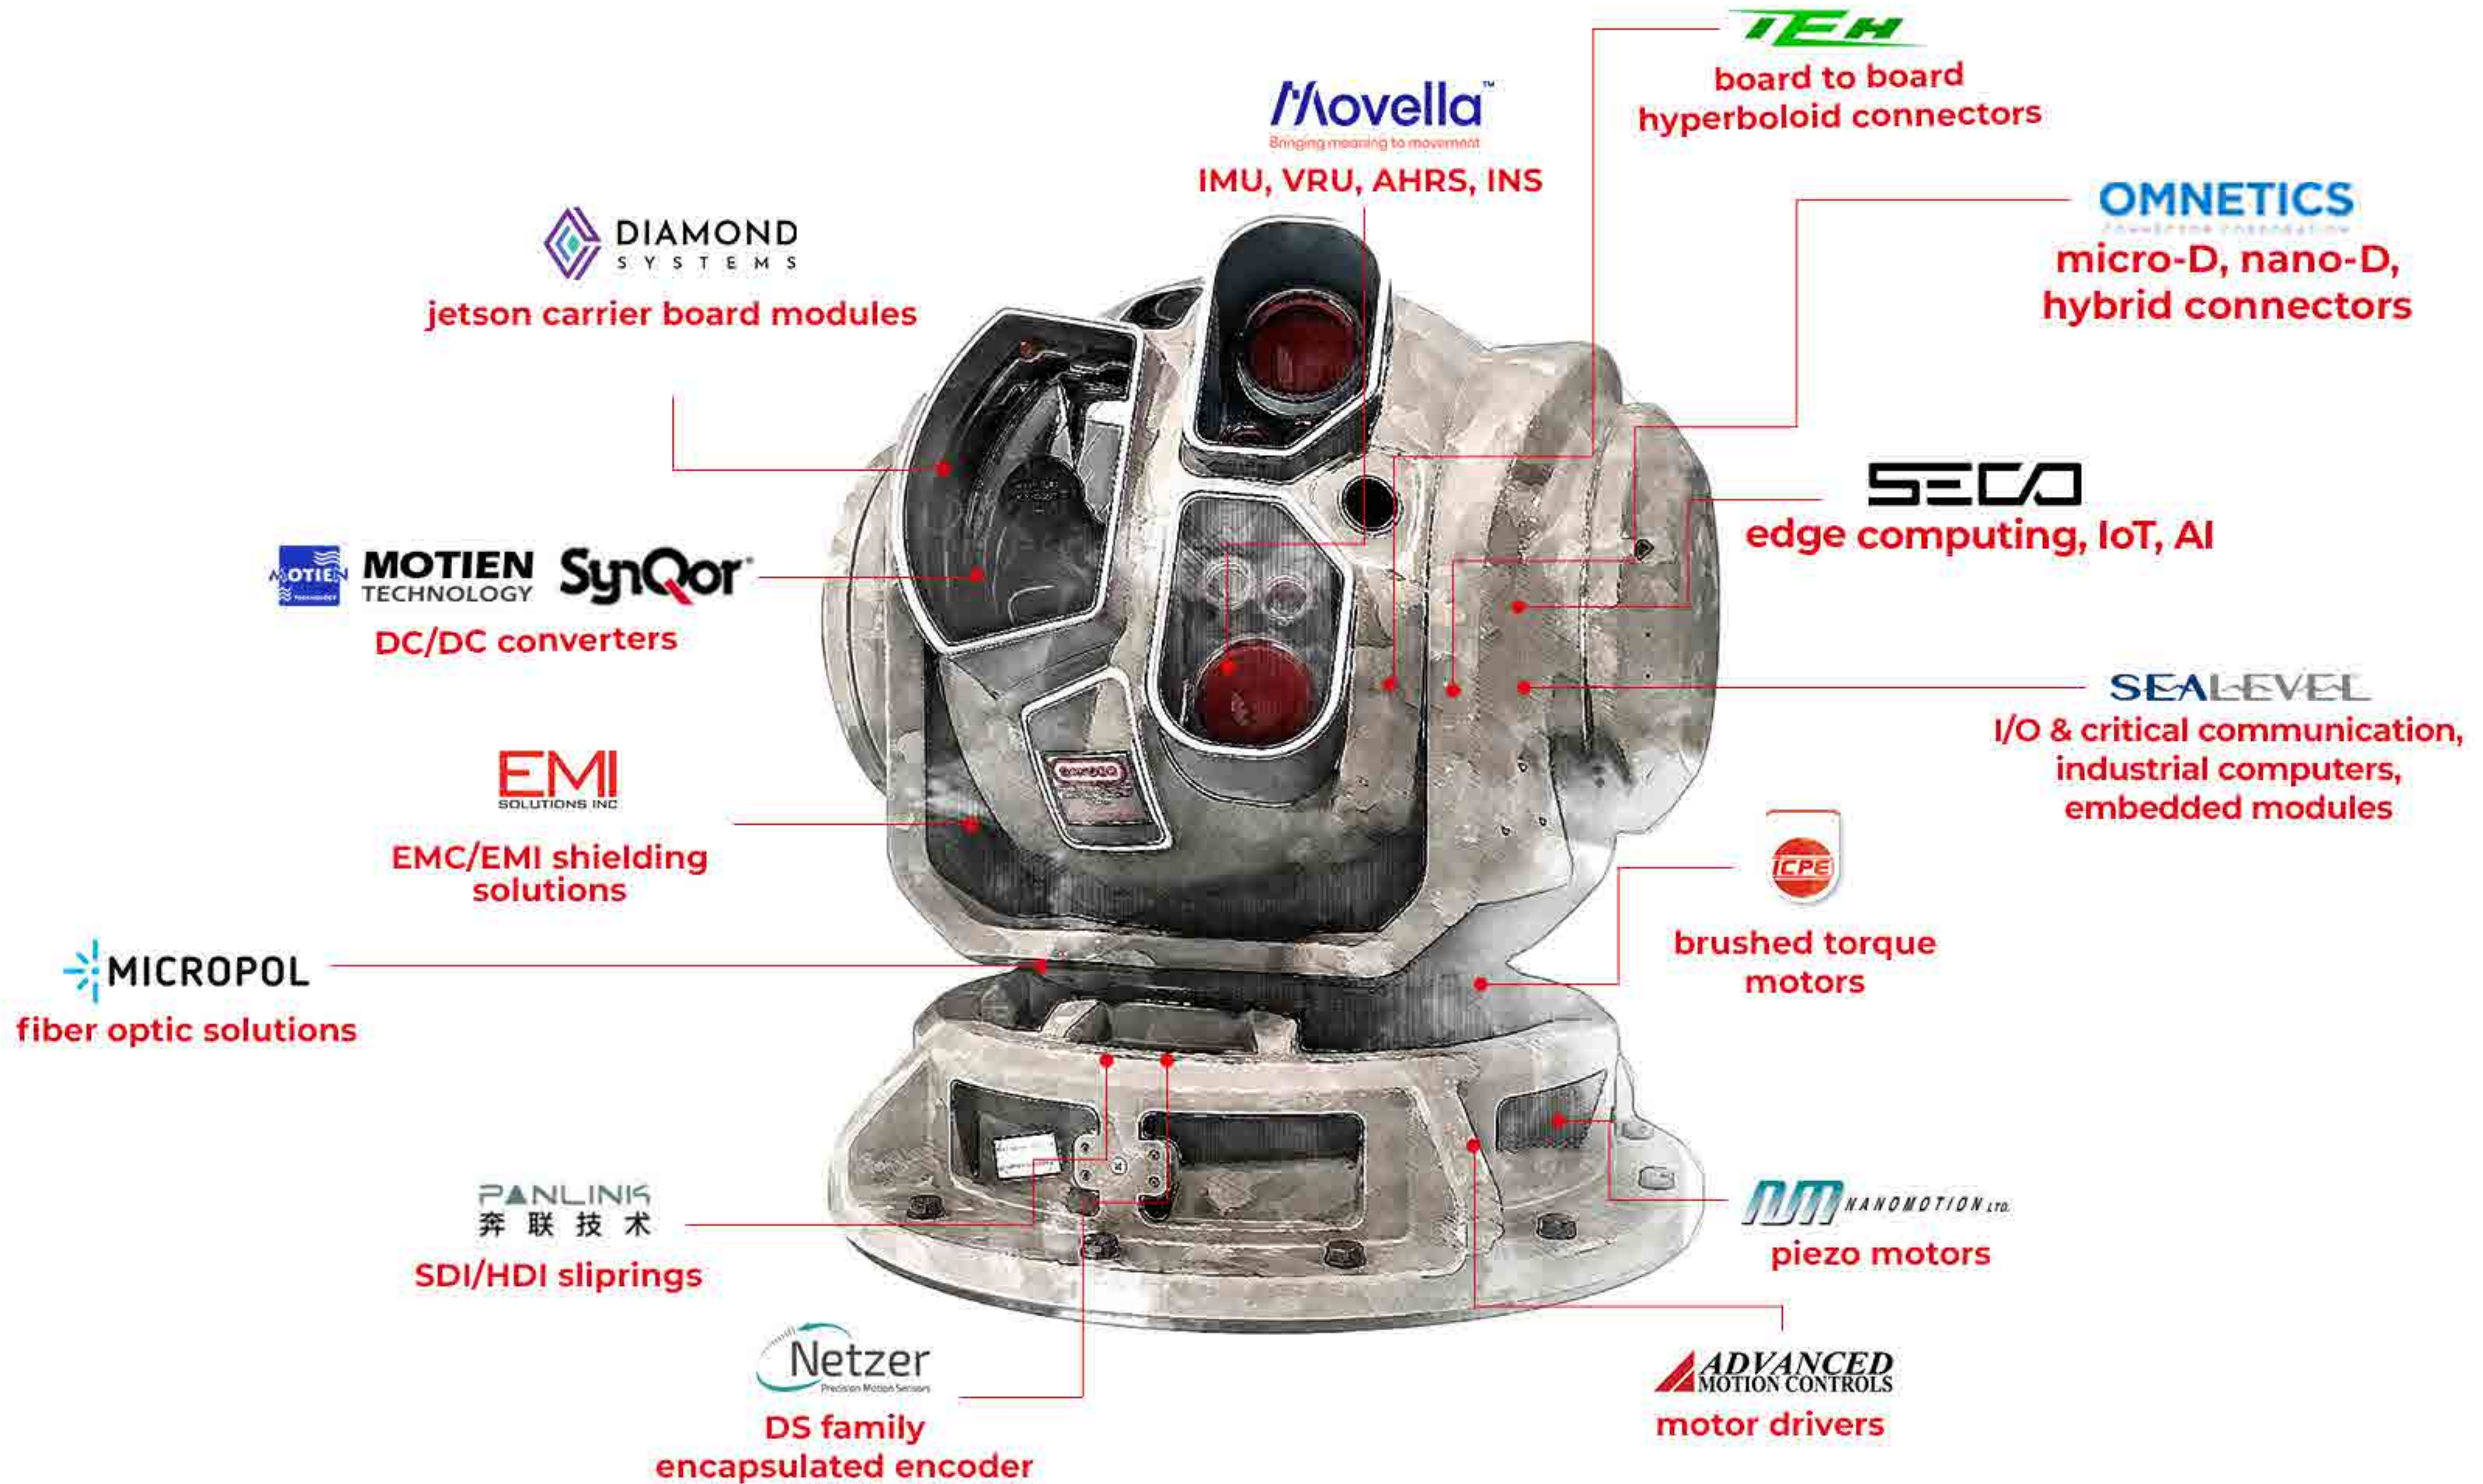





**SECO**  
edge computing, IoT, AI

**TEH**  
board to board  
hyperboloid connectors

**OMNETICS**  
micro-D, nano-D,  
hybrid connectors

**DIAMOND  
SYSTEMS**  
jetson carrier board modules

**Movella™**  
Bringing meaning to movement  
IMU, VRU, AHRS, INS

**MOTIEN TECHNOLOGY SynQor™**  
DC/DC converters

**EMI  
SOLUTIONS INC.**  
EMC/EMI shielding  
solutions

**MICROPOL**  
fiber optic solutions

**PANLINIS  
奔联技术**  
SDI/HDI sliprings

**Netzer**  
Precision Motion Sensors  
DS family  
encapsulated encoder

**ADVANCED  
MOTION CONTROLS**  
motor driver

**ICPE**  
brushed torque  
motor

**MM NANOMOTION LTD.**  
piezo motor

**SEALEVEL**  
I/O & critical communication,  
industrial computers,  
embedded modules





# SYNQOR

www.synqor.com

## COMPANY OVERVIEW

SynQor® is a leading supplier of power conversion solutions to the military, industrial, rail transportation, commercial avionics, medical and telecom/datacom markets. SynQor’s innovative products are designed to exceed the demanding performance, quality, and reliability requirements of today’s power electronic engineers and system integrators who develop leading-edge infrastructure hardware.

### MCOTS DC-DC CONVERTER



MCOTS PRODUCT FEATURES	COMPLIANCE FEATURES	PROTECTION/CONTROL FEATURES
<ul style="list-style-type: none"><li>▶ High efficiency, up to 95% at full rated load current</li><li>▶ Fixed frequency switching provides predictable EMI</li><li>▶ No minimum load requirement</li><li>▶ Rugged design for harsh environments</li><li>▶ Full Feature option on some models</li><li>▶ Flanged baseplate available</li><li>▶ Industry standard pin-out configurations and standard footprints.</li><li>▶ Available: High-capacitance option for very large output capacitance and extreme transient applications</li><li>▶ -55 °C to +100 °C Operating Temperature</li></ul>	<p><b>MilCOTS converters with MilCOTS filters are designed to meet:</b></p> <ul style="list-style-type: none"><li>▶ MIL-HDBK-704</li><li>▶ RTCA/DO-160 Section 16, 17, 18</li><li>▶ MIL-STD-1275</li><li>▶ MIL-STD-461</li><li>▶ DEF-STAN 61-5 (part 6)/(5, 6)</li></ul>	<ul style="list-style-type: none"><li>▶ Input under-voltage lockout</li><li>▶ Output current limit and short circuit protection</li><li>▶ Active back bias limit</li><li>▶ Output over-voltage protection</li><li>▶ Thermal shutdown (not on DM Package Size)</li><li>▶ On/Off control referenced to input side</li><li>▶ (ON/OFF control isolated in Full Bricks)</li><li>▶ Remote sense for the output voltage</li><li>▶ Digital Output Current Sharing (HZ &amp; HY only)</li><li>▶ Output voltage trim range of:<ul style="list-style-type: none"><li>(Half-Brick Zeta/Yota) <b>+10% to -20%</b></li><li>(Quarter-Brick Exa) <b>+10% to -50%</b></li><li>(Sixteenth Brick) <b>+10% to -10%</b></li></ul></li></ul>

### INQOR DC-DC CONVERTER



OPERATIONAL FEATURES	PROTECTION/CONTROL FEATURES	EFFICIENCY
<ul style="list-style-type: none"><li>▶ High efficiency up to 95%</li><li>▶ Input voltage ranges from 9 V to 425 V</li><li>▶ Output power up to 600 W</li><li>▶ Fixed frequency switching, low output noise</li><li>▶ No minimum load requirement</li><li>▶ Full Feature option on some models</li><li>▶ Industry standard pin-out configurations and standard footprints</li><li>▶ Operating Temperature -40 °C to +100 °C</li><li>▶ Output Voltage Set Point ±1.0%</li><li>▶ Output Voltage Ripple &lt;1% of Vout (typ.) pk-pk</li><li>▶ Isolation Voltage Up to 4250 Vdc</li></ul>	<ul style="list-style-type: none"><li>▶ Input under-voltage lockout</li><li>▶ Output current limit and short circuit protection</li><li>▶ Active back bias limit prevents damage to converter from external load induced pre-bias</li><li>▶ Digital output current sharing (Half Brick Zeta only)</li><li>▶ Output over-voltage protection</li><li>▶ Thermal shutdown</li><li>▶ Trimmable output voltages</li></ul>	<p>95%</p>

Continuous Input	34-160 V
Output	1.8-48 V
Max Power	120 W
Reinforced Isolation	3000 Vdc
Quarter Brick	DC/DC Converter





ISOLATED DC-DC CONVERTERS													
12 VDC INPUT (9-22 VDC INPUT RANGE, TRANSIENT 25 V)													
	VOUT	1.8 V	3.3 V	5 V	7 V	12 V	15 V	24 V	28 V	30 V	40 V	48 V	
Half Brick	HPC	60 A 108 W	V 50 A 165 W	36 A 180 W		15 A 180 W	12 A 180 W	7.5 A 180 W	6.5 A 182 W		4.5 A 180 W	3.7 A 178 W	
	HTC	50 A 90 W	40 A 132 W	28 A 140 W		12 A 144 W	9.5 A 143 W	6 A 144 W	5 A 140 W		3.5 A 140 W	3 A 144 W	
Quarter Brick	QTC	40 A 72 W	30 A 99 W	20 A 100 W	14 A 98 W	8 A 96 W	7 A 105 W	4 A 96 W		3 A 90 W		2 A 96 W	
	QGC	30 A 54 W	20 A 66 W	15 A 75 W	10 A 70 W	6 A 72 W	5 A 75 W	3 A 72 W		2.4 A 72 W		1.5 A 72 W	
24 VDC INPUT (18-36 VDC INPUT RANGE, TRANSIENT 50 V)													
	VOUT	1.8 V	3.3 V	5 V	7 V	12 V	15 V	24 V	28 V	30 V	40 V	48 V	50 V
Half Brick	HZC			60 A 300 W		42 A 504 W	34 A 510 W	21 A 504 W	18 A 504 W		12.5 A 500 W		10 A 500 W
	HEC								14 A 392 W				8 A 400 W
	HPC	60 A 108 W	50 A 165 W	40 A 200 W		8 A 216 W	8 A 216 W	9 A 216 W	7.5 A 210 W		10 A 500 W	4.5 A 216 W	
	HTC	50 A 90 W	40 A 132 W	30 A 150 W		13 A 156 W	10 A 150 W	6.5 A 156 W	5.5 A 154 W		4 A 160 W	3.3 A 158 W	
Quarter Brick	QTC	40 A 72 W	30 A 99 W	20 A 100 W	14 A 98 W	8 A 96 W	8 A 120 W	5 A 120 W		4 A 120 W		2.5 A 120 W	
	QGC	32 A 58 W	25 A 83 W	18 A 90 W	13 A 91 W	7.5 A 90 W	6 A 90 W	3.7 A 89 W		3 A 90 W		1.8 A 91 W	
	QMC									2 A 60 W		1.2 A 58 W	
Sixteenth Brick	SGC		15 A 50 W	10 A 50 W	7 A 49 W	4 A 48 W	3.3 A 48 W	2 A 48 W	1.8 A 50 W			1 A 48 W	
48 VDC INPUT (34-75 VDC INPUT RANGE, TRANSIENT 100 V)													
	VOUT	1.8 V	3.3 V	5 V	7 V	12 V	15 V	24 V	28 V	30 V	40 V	48 V	50 V
Half Brick	HZC			60 A 300 W		50 A 600 W	40 A 600 W	25 A 600 W	21.5 A 602 W		15 A 600 W		12 A 600 W
	HPC	60 A 108 W	60 A 198 W	46 A 230 W		21 A 252 W	17 A 255 W	10.5 A 252 W	9 A 252 W		6.3 A 252 W	5.2 A 250 W	
	HTC	50 A 90 W	45 A 149 W	34 A 170 W		16 A 192 W	13 A 195 W	8 A 192 W	7 A 196 W		5 A 200 W	4 A 192 W	
Quarter Brick	QTC	40 A 72 W	30 A 99 W	25 A 125 W	20 A 140 W	12 A 144 W	10 A 150 W	6 A 144 W		5 A 150 W		3 A 144 W	
	QGC	32 A 58 W	25 A 83 W	21 A 105 W	15 A 105 W	9 A 108 W	7 A 105 W	4.5 A 108 W		3.5 A 105 W		2.2 A 106 W	
Sixteenth Brick	SGC	28 A 50 W	15 A 50 W	10 A 50 W	7 A 50 W	4.1 A 50 W	3.3 A 50 W		1.8 A 50 W				
72 VDC INPUT (42-110 VDC INPUT RANGE)													
	VOUT	1.8 V	3.3 V	5 V	7 V	12 V	15 V	24 V	28 V	30 V	40 V	48 V	
Half Brick	HPC	60 A 108 W	60 A 198 W	46 A 230 W		21 A 252 W	17 A 255 W	10.4 A 250 W	9 A 252 W		6.3 A 252 W	5.2 A 250 W	
	HTC	50 A 90 W	45 A 149 W	34 A 170 W		16 A 192 W	13 A 195 W	8 A 192 W	7 A 196 W		5 A 200 W	4 A 192 W	
Quarter Brick	QTC		30 A 99 W	25 A 125 W	20 A 140 W	12 A 144 W	10 A 150 W	6 A 144 W		5 A 150 W		3 A 144 W	
	QGC		5 A 83 W	20 A 100 W	15 A 105 W	9 A 108 W	7 A 105 W	4.5 A 108 W		3.5 A 105 W		2 A 96 W	
110 VDC INPUT (66-160 VDC INPUT RANGE, TRANSIENT 170 V)													
	VOUT	3.3 V	5 V	7 V	12 V	15 V	24 V	28 V	30 V	40 V	48 V		
Half Brick	HPC	60 A 198 W	48 A 240 W		21 A 252 W	17 A 255 W	10 A 240 W	9 A 252 W					
	HTC	45 A 149 W	34 A 170 W		16 A 192 W	13 A 195 W	8 A 192 W	7 A 196 W					
Quarter Brick	QTC	30 A 99 W	25 A 125 W	20 A 140 W	12 A 144 W	10 A 150 W	6 A 144 W		5 A 150 W				
	QGC	23 A 76 W	18 A 90 W	15 A 105 W	9 A 108 W	7 A 105 W	4.5 A 108 W		3.5 A 105 W				



PRODUCT FAMILY MATRIX					
Input Voltage Range	2:1 INPUT RATIO			8:1 INPUT RATIO	
	9 V 18 V	<div><b>IQ12</b> Input Range: 34-75 V Transient: 100 V Max Power: 602 W Eff: Up to 95%</div>	<div><b>IQ24</b> Input Range: 18-36 V Transient: 50 V Max Power: 510 W Eff: Up to 95%</div>	<div><b>IQ32</b> Input Range: 9-75 V Transient: 100 V Max Power: 255 W Eff: Up to 92%</div>	<div><b>IQ64</b> Input Range: 18-135 V Max Power: 200 W Eff: Up to 91%</div>
	25 V			<div><b>IQ48</b> Input Range: 34-75 V Transient: 100 V Max Power: 602 W Eff: Up to 95%</div>	
	34 V				
	75 V				
	100 V				
	170 V				
	<div><b>IQ42H</b> Input Range: 90-210 V Transient: 250 V Max Power: 150 W Eff: Up to 90%</div>	<div><b>IQ1B</b> Input Range: 66-160 V Transient: 170 V Max Power: 255 W Eff: Up to 93%</div>	<div><b>IQ4H</b> Input Range: 18-36 V Transient: 50 V Max Power: 510 W Eff: Up to 95%</div>		
475					

PRODUCT FAMILY MATRIX					
Input Voltage Range	4:1 INPUT RATIO			12:1 INPUT RATIO	
	9 V 18 V	<div><b>IQ12</b> Input Range: 9-36 V Transient: 40 V Max Power: 182 W Eff: Up to 92%</div>		<div><b>IQ68</b> Input Range: 12-150 V Transient: 170 V Max Power: 53 W Eff: Up to 90%</div>	
	25 V		<div><b>IQ70</b> Input Range: 34-135 V Max Power: 240 W Eff: Up to 93%</div>		
	34 V				
	75 V		<div><b>IQ90</b> Input Range: 34-160 V Max Power: 228 W Eff: Up to 94%</div>		
	170 V				

Input Voltage	Mode	Output Voltage	Package Size	Series	Thermal Design	Maximum Current	Options Description:		
							Enable Logic	Pin Length	Feature Set
IQ	12: 9-22 V	012: 1.2 V	S: Sixteenth Brick Q: Quarter Brick H: Half Brick F: Full Brick	K: Kilo M: Mega G: Giga T: Tera P: Peta E: Exa Z: Zeta	C: Encased D: Encased, Non-threaded Baseplate V: Encased, Flanged Baseplate	60: 60 A 50: 50 A 30: 30 A 10: 10 A 06: 6 A 02: 2 A (not all shown)	N: Negative	K: 0.110" N: 0.145" R: 0.180" Y: 0.250"	S: Standard (1/8 & ¼ only) C: Current monitor output/trimmable current limit (1/8 & ¼ only) F: Current share/trimmable current limit (half brick only)
	18: 9-36 V	015: 1.5 V							
	24: 18-36 V	018: 1.8 V							
	32: 9-75 V	025: 2.5 V							
	36: 18-75 V	033: 3.3 V							
	48: 34-75 V	050: 5 V							
	64: 18-135 V	070: 7 V							
	68: 12-150 V	120: 12 V							
	70: 34-135 V	150: 15 V							
	72: 42-110 V	240: 24 V							
	90: 34-160 V	280: 28 V							
	1B: 66-160 V	300: 30 V							
	2H: 90-210 V	400: 40 V							
	4H: 180-425 V	480: 48 V							
		500: 50 V							



COMPANY OVERVIEW

MOTIEN Technology is the professional and leading manufacturer of power solution since the establishment on 1998, with the great efforts and continually improvement for decades on power supplies, the brand MOTIEN has become well known and a symbol of quality and preferred & trusted DC power source.

Motien has more than 30 series of DC/DC converters, LED drivers and AC/DC converter modules. Products are widely built in modern electronic equipments: Industries Automation equipments, Telecommunication equipments, instruments, transportation system, medical equipments etc.

- GENERAL SPECIFICATION
  - Power rating: 0.25W~60W
  - DC / DC converters, LED drivers
  - Customized products
  - Minor change of standard product
  - New product development

PRODUCT GROUPS



RAILWAY SERIES	SMD SERIES	LED DRIVERS
ISOLATED DC/DC CONVERTERS <ul style="list-style-type: none"><li>▶ SIP-Packages</li><li>▶ DIP-Packages</li></ul>	NON - ISOLATED DC/DC CONVERTERS <ul style="list-style-type: none"><li>▶ SIP-Packages</li><li>▶ SMD-Packages</li></ul>	



# MOVELLA

www.movella.com

## COMPANY OVERVIEW

Movella is the leading innovator in 3D motion tracking technology and products. Our sensor fusion technologies enable a seamless interaction between the physical and the digital world in consumer electronics devices and professional applications such as Motion Capture, Motion Analysis, healthcare, sports and industrial applications.



### MTI-600 SERIES



- Fully supported by the MT Software Suite (free use), enabling our customers a faster time to market
- Small footprint, flexible mounting options
- Industrial grade accuracy & reliability at affordable pricing, 100% calibrated and tested
- Rich interface platform, incl. CAN bus support
- External and internal GNSS-RTK receiver support
- Advanced proprietary XKF3 core sensor fusion algorithms
- State-Of-The-Art hardware components
- Extensive technical support
- RTK Solution
- ITAR-free

### MTI 100 SERIES



- Highest performance with resistance to magnetic distortions
- Vibration-rejecting gyroscopes and accelerometers
- Configurable output settings, synchronizes with any 3rd party device

### MTI-G-710



- All-in-one sensor system with high-frequency position and orientation output
- Excellent heading tracking without requiring a magnetic field
- Configurable output settings, synchronizes with any 3rd party device

	ROLL/PITCH STATIC	ROLL/PITCH DYNAMIC	YAW	SENSOR FUSION CORE	POSITION & VELOCITY
MTi 1-series					
MTi-1 IMU	-	-	-	-	-
MTi-2 VRU	0.5°	0.8°	AHS	XKF	-
MTi-3 AHRS	0.5°	0.8°	2.0°	XKF	-
MTi-7 GNSS/INS	0.5°	0.5°	1.5°	XKF	1 m   0.05 m/s
MTi 600-series					
MTi-610 IMU	-	-	-	-	-
MTi-620 VRU	0.2°	0.5°	AHS	XKF	-
MTi-630 AHRS	0.2°	0.5°	1.0°	XKF	-
MTi-670 GNSS/INS	0.2°	0.5°	1.0°	XKF	1m   0.05m/s
MTi-680G RTK-GNSS/INS	0.2°	0.5°	1.0°	XKF	0.05m / 0.05m/s
MTi 10-series					
MTi-30 AHRS	0.2°	0.5°	1.0°	XKF	-
MTi 100-series					
MTi-100 IMU	-	-	-	-	-
MTi-200 VRU	0.2°	0.3°	AHS	XEE	-
MTi-300 AHRS	0.2°	0.3°	1.0°	XEE	-
MTi-G-710 GNSS/INS	0.2°	0.3°	0.8°	XEE	1 m   0.05 m/s



REAL-TIME SENSOR FUSED DATA						
	IMU <sup>(1)</sup>	VRU <sup>(2)</sup>	AHRS <sup>(3)</sup>	GNSS/INS <sup>(7)</sup>	RTK-enabled GNSS / INS <sup>(8)</sup>	RTK-enabled VINS
	Intertial Measurement Unit	Vertical Reference Unit	Attitude and Heading Reference System	GNSS / GPS enabled Intertial Navigation System	Real Time Kinematics	Attitude and Heading Reference System
	Gyroscope	Roll	Roll	Roll	Roll	Roll
	Accelerometer	Pitch	Pitch	Pitch	Pitch	Pitch
Magnetometer	Unref. Yaw	Unref. Yaw	Unref. Yaw	Unref. Yaw	Unref. Yaw	Unref. Yaw
Barometer				3D Position	<sup>cm-level</sup> 3D Position	3D Position
GNSS Receiver				3D Velocity	3D Velocity	3D Velocity
				GNSS Time	GNSS Time	GNSS Time
RTK Corrections						
Camera ( B&W ) & Wheel Odometry <sup>(External Source)</sup>					Long term dead-reckoning	



# OMNETICS

www.omnetics.com

## COMPANY OVERVIEW

Omnetics is a world-class miniature connector design and manufacturing company with over 30 years of experience, focused on Micro-miniature and Nano-miniature highly reliable electronic connectors and interconnection systems. Our miniature connectors are designed and assembled in a single location at our plant in Minneapolis, Minnesota.

SINGLE ROW NANO-D							
Horizontal SMT (AA)	Vertical SMT (VV)	Straight Tails (DD)	Thru-Hole Horizontal (H2)	Thru-Hole Vertical (V2)	Pre-Wired (W2)	Jumpers (JU)	MILDTL-32139 QPL

LATCHING NANO-D			
Surface Mount (AA)	Flex Mount (FF)	Straight Thru-Hole (DD)	Pre-Wired (WD)


LOW PROFILE MICRO-D				
Discrete Wired (WD)	Right Angle Thru-Hole (H1)	Right Angle Thru-Hole (R2)	Solder Cup (SS)	Straight Thru-Hole (S2)

### ● Power and Signal Micro Hybrids: 10A, 5A, 3A



### ● Nano Coax Connectors

Omnetics Nano Coax contacts are available either in a Hybrid Micro-D or as a standalone contact... The standalone version provides optimal performance in one of the lowest form factors on the market. The Nano Coax contacts are designed to be terminated to a low-loss 29 AWG (.047”) 50 coax cable. Cable-Cable: 20GHz / Edge Launch: 20GHz / Thru Hole: 10GHz

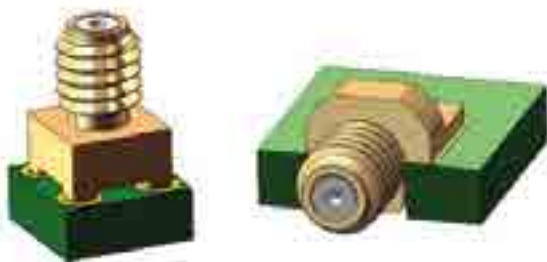



● **Micro 360® Circular Connectors**

Omnetics’ Micro Circular Connector Series utilizes Omnetics’ rugged and reliable Flex-Pin contact system, is spaced on 50 mil (1.27mm) centerlines, features a mated length of less than 12.4 mm, and is specified to MIL-DTL-83513.



● **IP68 Nano Circularity**

Omnetics’ Micro Circular Connector Series utilizes Omnetics’ rugged and reliable Flex-Pin contact system, is spaced on 50 mil (1.27mm) centerlines, features a mated length of less than 12.4 mm, and is specified to MIL-DTL-83513.



● **Micro Strip Connectors**

XT				5-30VDC			
IR104-PBF	PC/104			20 In 3-24V	20 SPST	30VDC/5A	

Single row: pin count changes up to 48  
Dual row: pin count changes up to 97 available with latch

● **Nano Strip Connectors**

			
EMM-8EL-XT	EMM-8P-XT	EMM-8PLUS-XT	EMM-4M-XT





2-60 positions for single row  
2-48 for dual row

● **Polarized Nano Connector (PZN)**

This configuration effectively polarizes the connector without the additional space required for guide pins. Termination options include: Pre-Wiring, Straight tail, Horizontal SMT, and Vertical SMT. Up to 24 positions.

SERIAL I/O											
Product	Form Factor	#RS-232	Max Rate	#RS-422	Max Rate	#RS-485	Max Rate	Isolated	Protocol	Address	GPIO

● **Capabilities**

LATCHING NANO-D	EMI SHIELDING	CUSTOM HARNESSING	CUSTOM METAL SHELL
			






IEH

www.iehcorp.com

COMPANY OVERVIEW

Since 1941, IEH has been manufacturing superior products for demanding applications. Whether it’s printed circuit board connectors, signal or power contacts, or custom interconnects, focus is delivering the right connector solution.




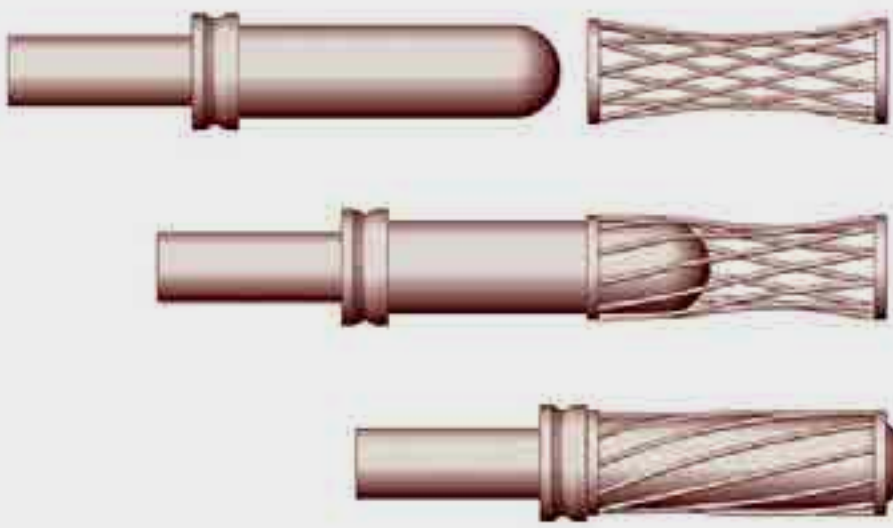


Hyperboloid Technology





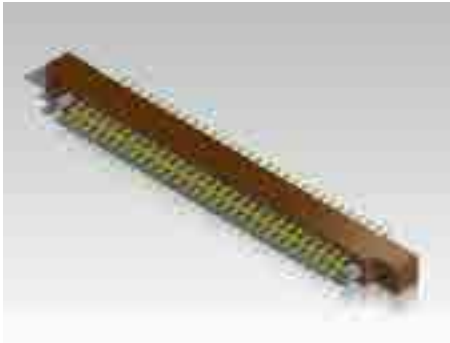

Utilized in all of our receptacle connectors, this unique design offers superior capability in every critical parameter of connector performance:

- ▶ Very low insertion force
- ▶ All but impervious to shock & vibration(Test exceed 300 g's without discontinuity.)
- ▶ 100,000 minimum duty cycles
- ▶ Extremely low contact resistance
- ▶ Improved current carrying capacity (The low contact resistance gives a lower °C rise from ambient under load. This feature often allows the user to operate the same size contact under higher load.)
- ▶ High reliability

PCB CONNECTORS

		
Type N Circulator from 300MHz to 10 GHz	HRM Series - .075" centers 2 & 3 row 10-206pos M55302 /190 /193	HMM Series - .075" centers 4, 6 & 8 row 58-604pos
		
HGC/HGS Series Low-Profile for parallel boards 22-90pos	HVM Series - .050" centers 2-row 10-100pos	HMK Series - .100" centers, 2, 3, 4 & 5 row 17-490pos

HYPERKINETIC® CONNECTORS - HIGH SPEED, HIGH DENSITY MODULAR

			
HKC (cPCI Series)		HKX (VPX-Compatible Series)	
<ul style="list-style-type: none"><li>▶ Interchangeable with COTS board layout but with Hyperboloid Contact System</li><li>▶ 2mm Footprint of cPCI PICMG 2.0</li><li>▶ LCP Insulator Meets Outgassing Requirements</li><li>▶ Press-fit or Solder tail Terminations</li></ul>		<ul style="list-style-type: none"><li>▶ VITA-46 Platform</li><li>▶ Data Rates up to 10 Gbps</li><li>▶ 3U, 6U and Custom Configurations</li><li>▶ Custom Wafer Design for Mixing</li><li>▶ Differential and Single-ended Circuits</li><li>▶ Press-fit or Solder tail Terminations</li></ul>	



# MICROPOL

www.micropol.com

## COMPANY OVERVIEW

Micropol manufactures and supplies cable systems with rugged, high-quality field cables that can cope with extreme temperatures. Lengths range from a few decimeters to up to several kilometers. We offer different types of expanded beam connectors, both for single-mode and multimode. Take for example our Falcon connector which is used for harsh military and aerospace environments. They are all hermaphroditic, and always connect correctly without any adapter needed.

The Smallest and Lowest Loss Expanded Beam Connector On The Market - Falcon



- FALCON Mini 1–4 channels, Junior 1-12 channels, Senior 1-16 channels
- Insertion loss < 1.2 dB vs Nato standard < 2.5 dB
- Operating temperature -57 to +85°C, +100°C optional.
- Single Mode/Multi Mode
- Hermaphroditic
- IP67
- In accordance with MIL-DTL-83526/20&21

### MECHANICAL

**Coupling Type:** Hermaphroditic  
**Compliant:** 650 - 1650 nm  
**Material:** Hard anodized aluminum  
**Alternative Material:** Marine bronze & stainless steel  
**Colour:** Gray  
**Durability:** 3000 mating cycles  
**Free Fall:** 500 falls from 1,2 meters height  
**Vibration:** 5-500Hz, 0,75mm amplitude at 10 g  
**Shaking:** 390 m/S numbers of shakes 3x4000  
**Shock Pulse Lenght:** 11ms, half sine at 35g Numbers of axis: 3 (x, y, z)

### ENVIRONMENTAL

**Operating Temperature:** -550C to +850C, +1000C optional  
**Water Immersion:** 10 m water depth-mated  
**Air Pressure :** <25kPa -550C during 4h  
**Corrosion Resistance:** 500h salt spray  
**Flammability:** DOD-STD-1678, method 5010

Cable Reel



- 1–16 fiber
- Mounted on cable reel
- Split with fanout cable
- Insertion loss < 1,2 dB
- Connector size: mini, junior, senior
- 15 000 000 bendings at 30 mm radius
- Operational temperature range from -400C to +850C
- Standard configuration up to 500 meters (can be adjusted according to specifications)

Backpack Cable Drum



Cable



- For heavy duty use
- 1–384 fiber
- Operating temperatur -55°C to +85°C
- Vertical installation
- High flex, up to 15 million bends
- Rodent resistant

MIL-PATCHCORD



- Operating temperature -55 to +85°C
- Connectors with metal outer body
- Cut resistant
- Higher spring load
- Standard and Tailor-made



• **Test Kits**



• **Cable Monitor**



**Prevents information tapping, detects cable cut off and cable vibrations**

- Detects cable cut-off
- Detects specific vibrations of the cable
- Detects specific vibrations of the cable

• **Distribution Frames, Pigtails, Patchcords**



- Insertion loss < 0.2dB
- Return Loss > -55 dB
- 2-384 fiber

• **ODF Boxes**



- Future proof
- Tailor-made
- Insertion loss < 0.2 dB
- Return loss > -55 dB (UPC)
- Return loss > -65 dB (APC)
- 2-384 fiber
- More fiber available on request

• **Fan Out**



- Single mode/multi mode
- 2, 4, 8, 12, 16, 24 FIBER
- Standard lengths 1.6 or 2.4 m
- Customized lengths on request
- Rugged fanout
- Insertion loss < 0.2 dB
- Return loss > -55 dB (UPC), > -65 dB (APC)
- Available in S12 color coding

• **Attenuator**



- Metal ion doped fiber
- High-power light source durability
- Wavelength independence
- Attenuation levels ranging from 1 dB to 30 dB
- 1310 nm, 1550 nm, 1250-1625 nm and 1350/1550 nm dual wave lengths

• **MTP/MTO**



- Data center approved
- Insertion loss (reference cable)<0.3 dB/channel
- Return loss > -65 dB (SM)
- High density 4-72 fiber
- MTP-MPO fanout
- MTP-MPO patch
- MTP-MPO jumper cable assembly

• **Custom Solutions**








# EMI SOLUTIONS INC.

[www.4emi.com](http://www.4emi.com)

## COMPANY OVERVIEW

Headquartered in our expanded facility in Irvine, California, our company was established in 1996 based on the development of our FlexFilter inserts for EMI filtering. Over the years, EMI Solutions has steadily grown by diversifying our product offering to meet our customer’s needs.

### Flexfilter Inserts

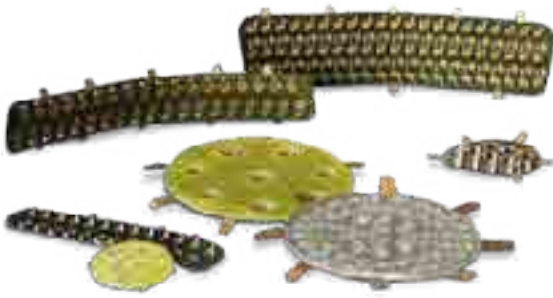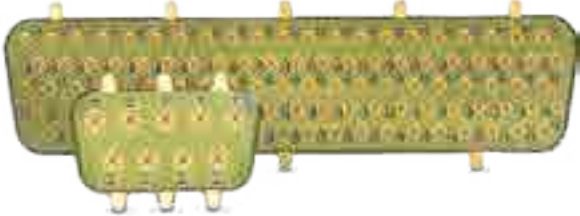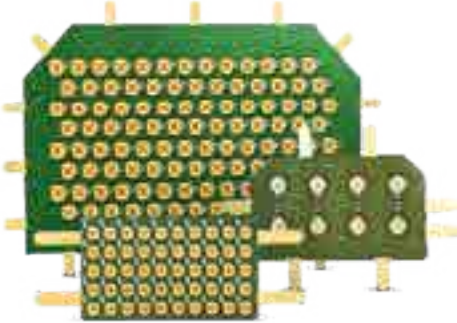MIL-CIRCULAR	D-SUB	ARINC
		
Meets requirements for:		
DO-160	MIL-STD 461	MIL-STD 810G
<ul style="list-style-type: none"><li>Quick turn</li><li>Cost effective</li><li>High Reliability</li><li>Simple installation - configured to your existing connector</li><li>Suited for High Voltage and Severe Environments</li><li>Select Components (Caps, Resistors, Diodes and more) on a pin by pin basis</li></ul>		

### Filtered MIL-Circular Connectors

	
Designs for all Mil-Circular Connectors including:	
D38999	M26462
M5015	

#### Pi Filters

- Highest Performance with minimal resonance Insertion Loss of 70 – 80 dB
- Limited number of available capacitances and variations

#### Planar Arrays or Discoidal Capacitors

- Very good broadband performance
- Insertion loss of 50 – 60 dB
- Can be combined with Inductors (L) for improved performance

#### Chip Capacitor

- Good for “notch” type filtering
- Reduced higher frequency performance due to chip cap resonance
- Insertion Loss of 40 - 45 dB
- Wide variety of capacitances and variations available



● **Filtered D-Sub Connectors**



Designs for all Mil Spec D-Sub Connectors:

MIL-24308

MIL-83513


C & Pi Filters

- ◆ Highest Filter Performance with Minimal Resonance
- ◆ Insertion Loss of 70 - 80 dB
- ◆ Limited number of available capacitances and variations


Chip Capacitor

- ◆ Good for “notch” type filtering
- ◆ Reduced higher frequency performance due to chip cap resonance
- ◆ Insertion Loss of 40 - 45 dB
- ◆ Wide variety of capacitances and variations available

● **Chip Capacitor Filter Performance**

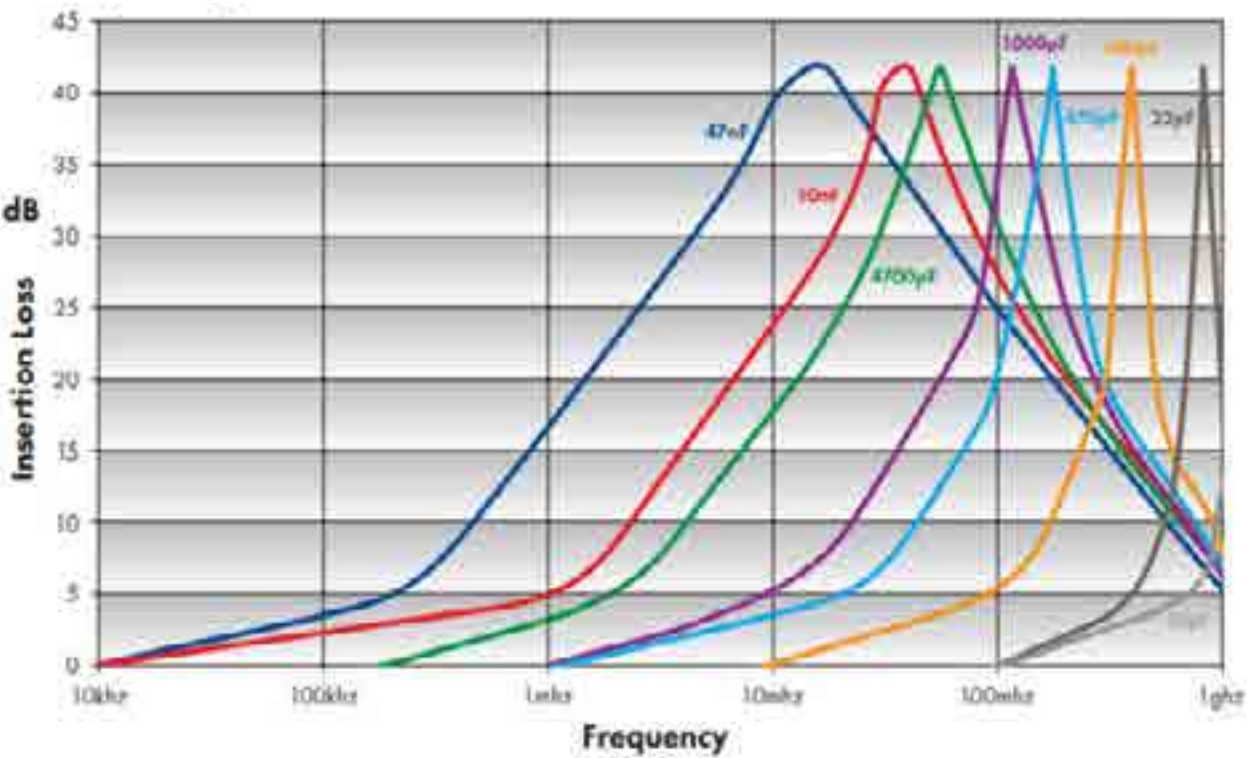

● **Filtered Connector Performance**

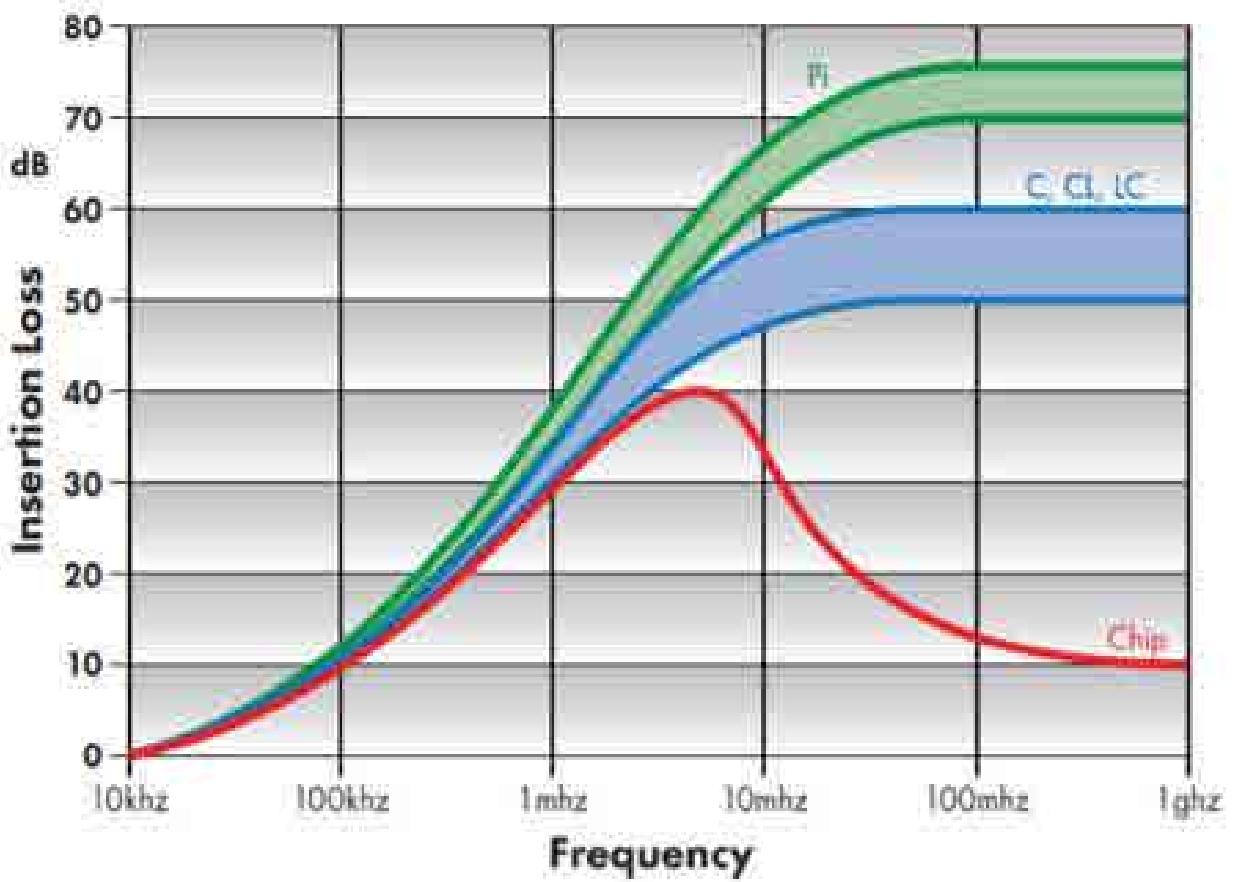

	Capacitance Options	Filter Performance
Pi with Planar Arrays	100 pF – 1 uF+	70+ dB
Pi Tubes	47 pF – 12,000 pF	70+ dB
Discoidal Capacitor (C)	470 pF – 40,000 pF+	50 – 60 dB
Planar Array (CL & LC)	100 pF – 1 uF+	50 – 60 dB
Chip Capacitor	3 pF – 47,000 pF+	>40 dB

C

CL

LC

PI

PI FILTERING
Built with Pi Tubes, Discoidal or Planar Arrays
Provides C-L-C Component Configuration
Highest Performance: 70+ dB Insertion Loss
Very Good High Frequency Performance
C, C-L OR L-C FILTERING
Built with Chip Caps, Discoidals, Planars or C Tubes
45 - 60 dB Insertion Loss
Good Broad Spectrum Filter Performance
CHIP CAPACITOR FILTERING
40+ dB Insertion Loss
Quick Turn
Lowest Cost Option
Limited High Frequency Performance

● **Termination Options**



● **Feed Thru Filters**

- ◆ Solder in, Screw in, or Press in versions
- ◆ Ideal for RF Applications
- ◆ Circuit types: C, CL, LC, Pi
- ◆ Typical Capacitance: 1.0pF to 20,000+ pF
- ◆ Operating Temp: -55°C - +125°C
- ◆ Hermetic Seal option
- ◆ Various sizes and threads
- ◆ High Working Voltage Rating: 50-500V typical
- ◆ Custom versions available





COMPANY OVERVIEW

ADVANCED Motion Controls has earned a reputation for being the most flexible and affordable manufacturer of quality high performance and high power density servo drives. By selecting ADVANCED Motion Controls as your servo drive and controls supplier, you will be adding an integral member to your design engineering team with multi-industry expertise. 30+ years of servo drive manufacturing, with nearly 3 million servo axes built and shipped worldwide!



ANY NETWORK



We also have the ability to quickly produce custom DigiFlex® Performance™ drives utilizing many other common types of network communication.

ANY MOTOR

Three Phase (Brushless)	Single Phase
<ul style="list-style-type: none"><li>▶ Servo – BLDC, PMAC</li><li>▶ AC Induction (Closed loop vector)</li><li>▶ Closed loop stepper</li></ul>	<ul style="list-style-type: none"><li>▶ Brushed</li><li>▶ Voice coil</li><li>▶ Inductive load</li></ul>

ANY FEEDBACK

ABSOLUTE ENCODER	Tachometer
<ul style="list-style-type: none"><li>▶ EnDAT®</li><li>▶ Hiperface®</li><li>▶ BiSS®C – Mode</li></ul>	<ul style="list-style-type: none"><li>▶ ±10 Vdc</li><li>▶ ±60 Vdc</li></ul>
1 VP – P SIN/COS ENCODER	Aux. Incremental Encoder
INCREMENTAL ENCODER	Resolver
±10 Vdc position	Hall Sensors

ANY CONTROLLER

Digital or analog controllers	Digital or analog controllers
<ul style="list-style-type: none"><li>▶ ±10 Vdc</li><li>▶ PWM and Direction</li><li>▶ Step and Direction</li></ul>	<ul style="list-style-type: none"><li>▶ 0 – 5 V (Standard, Inverted or Wigwag)</li><li>▶ 0 – 5 kW (Standard, Inverted or Wigwag)</li></ul>

ANY ENVIRONMENT


Extreme Ambient Temperatures	Component Temperature Protection
<ul style="list-style-type: none"><li>▶ Standard products range from -40°C to +85°C</li><li>▶ Custom products operate down to -50°C and lower, and +100°C and higher!</li></ul>	<ul style="list-style-type: none"><li>▶ Ø PCB operating temperatures up to 105°C</li></ul>



• **ADVANCED Motion Controls Advantages:**


- Battery supplied, mobile operation needing 8+ hours duty / 7-day standby capability
- • ≥98% efficiency to extend overall battery life
- • Multiple power demands
- • Common control system dictated same servo drive interface but with models having different power levels
- • Minimal maintenance
- • Operation typically in remote locations
- • Long service life expected

• **DigiFlex® Performance™ Servo Drives**

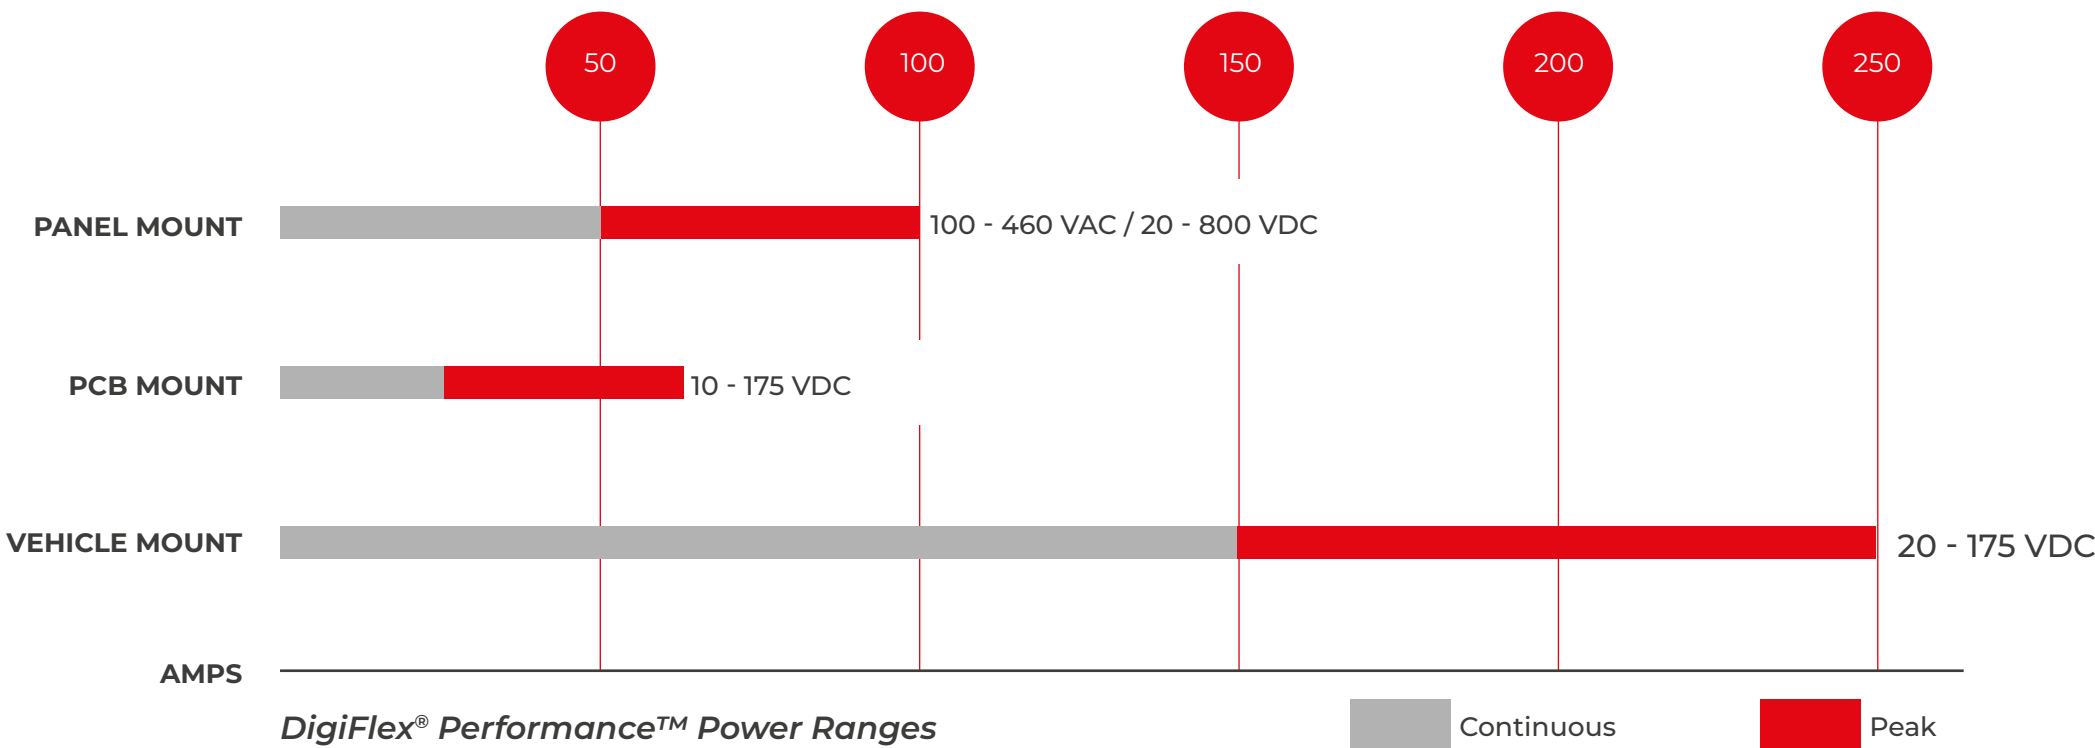

- Peak power output up to 27.4kW
- Three phase brushless (servo, closed loop vector, closed loop stepper)
- Single phase (brushed, voice coil, inductive load) motors
- Variety of feedback options - Absolute Encoder (EnDat®, Hiperface®, BiSS® C-Mode), Incremental Encoder, Hall Sensors, Resolver, 1Vp-p Sin/Cos Encoder, Tachometer
- Compatible with DriveLibrary™ - ADVANCED Motion Controls' API for C++ motion programming

• **AxCent™ Servo Drives**

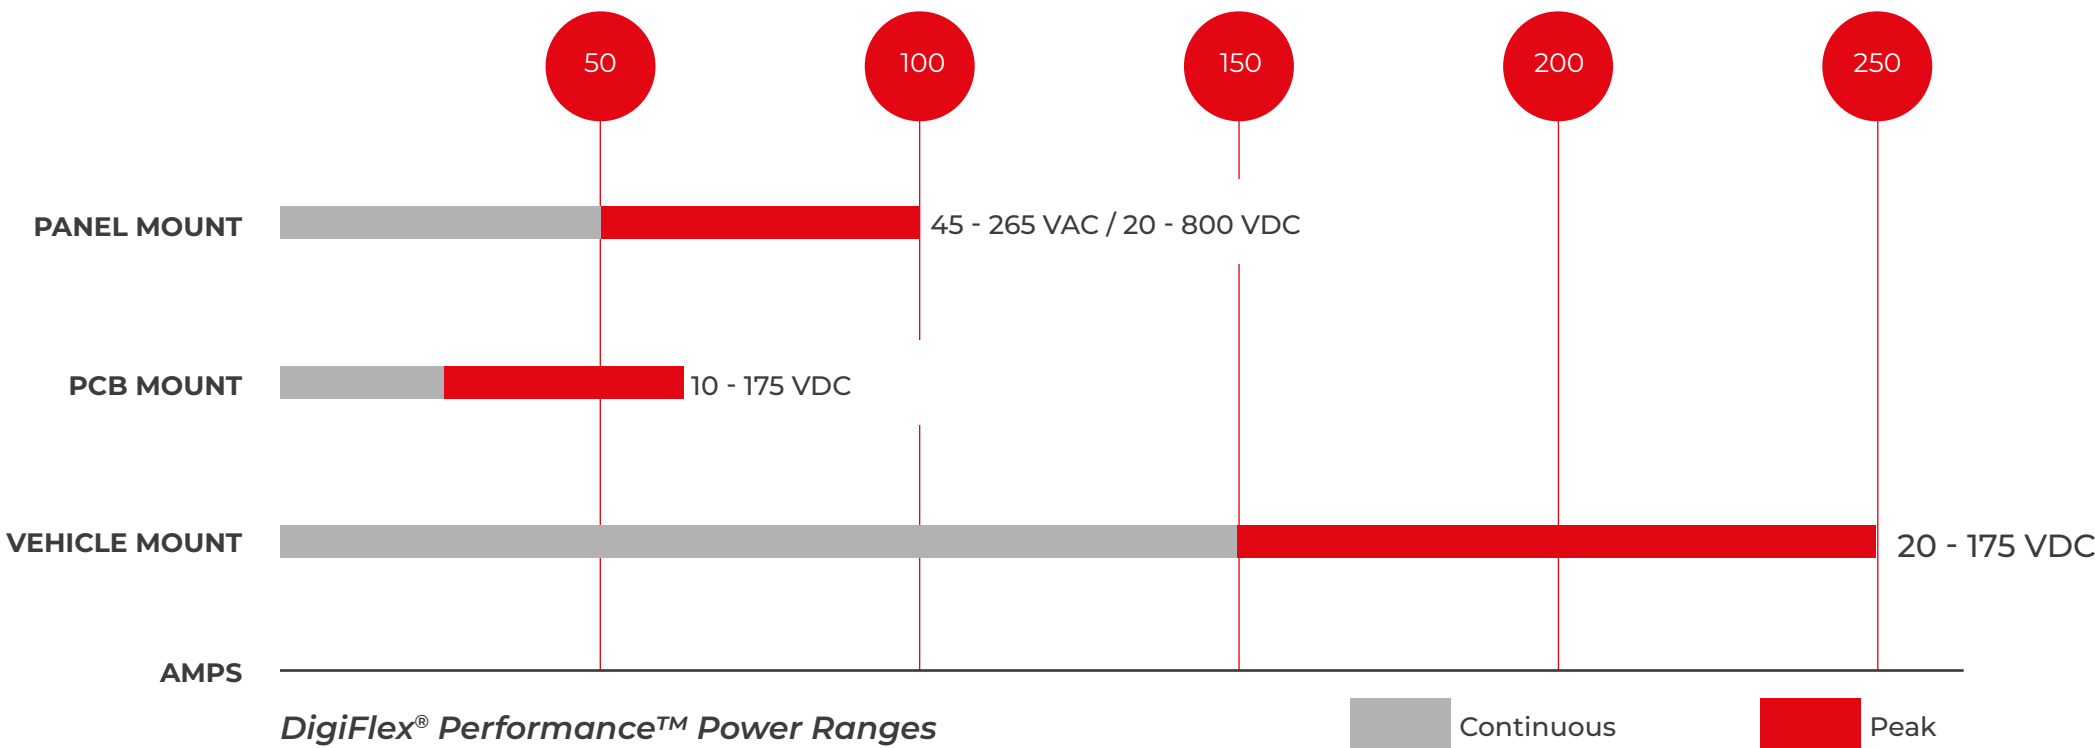

- Unparalleled benefits in both simplicity and performance,
- NOT require computer hardware or software,
- Higher bandwidth and faster response times at a lower cost,
- Including ±10V analog, PWM and Direction, and specialized electric vehicle commands,
- Optical isolation between high and low power signals standard on certain models
- Current, Velocity, and Fault Monitor analog output signals

• **Extended Environment products (AZX – DZX Series)**

ADVANCED Motion Controls' Extended Environment products are designed to operate under harsh thermal and mechanical extremes.

- Ambient operating temperatures from -40°C to 85°C
- Over Temperature up to 105°C
- Thermal rise cycling in about 2 minutes
- Shock up to 15g's at 11ms
- Vibration up to 30grms on all 3 axes
- Designed to assist system compliance toward: MIL-STD-810F: temperature, thermal shock, humidity, altitude, shock & vibration





COMPANY OVERVIEW

ICPE or Institutul de Cercetări Electrotehnice® was established over 65 years ago. The modern research infrastructure, obtained successfully following the performance of local and international projects, is a solid basis for further research in electrical engineering, and related fields.

DC BRUSHED TORQUE MOTORS

DC Torque Motors operate on the same principles as the conventional DC motors but the magnetic circuit design and consequent mechanical configuration are designed for maximum torque output rather than the usual low torque / high speed characteristic. Arrange of unoused units which are supplied as three separate components, a permanent magnet field assembly, a wound armature with precision bore for mounting and a brush ring assembly or brush segments.

Fixed element – the stator, is equipped with rare earth permanent magnets and the rotor is equipped with a dc specific winding which is connected to an extra flat commutator – brushed system. Low speed Torque Motors are beneficial for direct-drive applications. Position and velocity feedback can be achieved via additions of DC Tachos, Resolvers or Optical Encoders. The unoused motors described below can be offered in custom designed housings for specific applications.



PRODUCT CODE	PEAK TORQUE [mNm]	TORQUE SENSITIVITY [mNm/A]	MOTOR CONSTANT [mNm/W]	OUTSIDE DIAMETER [mm]	HEIGHT [mm]
TQRB-15-0.39	77.7	25,1	10,3	38,10	9,78
TQRB-15-0.51	127	36,3	13,9	38,10	12,95
TQRB-15-0.51-B	141	32,4	16	38,10	12,95
TQRB-15-1.03	333	83,2	39,2	38,10	26,00
TQRB-15-1.1	353	50,4	28,3	38,10	27,94
TQRB-20-1.14	1200	150	86,6	51,00	29,00
TQRB-24-1-C	600	195	68,2	60,32	25,40
TQRB-30-0.78	777	256	87,4	76,20	19,80
TQRB-34-0.51	883	160	74,1	85,725	12,95
TQRB-34-0.95-A	2048	438	195	85,725	24,40
TQRB-34-1.46	3140	551	271	85,725	36,90
TQRB-37-0.54	1060	210	85,4	92,075	13,72
TQRB-37-0.54-B	1060	158	85,4	92,075	13,72
TQRB-37-0.84	2120	358	156	92,075	21,33
TQRB-37-1.46	4000	681	341	92,456	37,008
TQRB-45-0.56	2300	340	146	114,3	14,22
TQRB-45-0.69-B	3250	542	238	114,3	17,45
TQRB-45-0.69-C	3250	963	238	114,3	17,45
TQRB-45-0.86	4590	715	277	114,3	21,84
TQRB-45-1.08	6510	838	401	114,3	27,28
TQRB-51-0.58	2825	251	180	130,175	14,73
TQRB-51-0.93	2800	1400	422	130,175	23,9
TQRB-51-1.0	4800	1200	490	130,175	25,5
TQRB-51-2.1	10000	1515	716	130,175	53,34

D.C. LIMITED ANGLE BRUSHLESS TORQUE MOTORS

Limited Angle Torque Motors are ideal for compact, limited angular excursion, rotary, closed loop servo applications. Operating in the system, these units endure a long storage life and a harsh thermal and mechanical environment. All motors consist of a housed stator with a high density winding around a steel core, molded in a special resin. The rotor is build from high-grade samarium cobalt magnets or neodymium, on a stainless steel core.

- Advantages
- No Torque Ripple

High Angular Acceleration

No Commutation

Brushless

Low Profile





AC SERVO MOTORS – BSM SERIES

BSM Series motors are available with high energy Nd-Fe-B magnets - 6 (six) magnetic poles - F Class Insulation - standard feedback system with resolver - winding protection with PTC - Standard protective structure is IP55 class - torque range from 0.1 to 20 Nm - high torque to weight ratios - superior low speed performance - very low inertia.

In this motor range below options are also available:

- Shaft with keyway according to DIN 6885
- Fail safe brake 24 VDC,
- Shaft seal ring,
- Additional feedback systems (encoder),
- Protection class IP65,
- Custom windings,
- Special dimensions and configurations.



SINUSOIDAL OUTPUT TRANSDUCERS – RESOLVERS

Resolvers which are directly supplied on the rotor winding, used on either limited angle, case in which they are supplied by means of flexible cables or on 360 degrees and, in this case, they are supplied through some collecting rings, as well as resolvers supplied by means of rotary transformer with a constant transformation ratio and the input and output winding terminals on the stator.

Advantages

- Used as an absolute angle transducer,
- Resistance to mechanical stresses,
- Operation within a wide temperature range.



OUTER ROTOR BRUSHLESS MOTOR

PARAMETER	SYMBOL	UNITS	VALUE
Nominal Torque	M <sub>n</sub>	Nm	9
Peak Torque	M <sub>max</sub>	Nm	27
Motor Constant	K <sub>M</sub>	N/W	1,4
Voltage	V <sub>DC</sub>	V	600
Nominal Current	I <sub>n</sub>	A	8,3
Torque Constant	K <sub>T</sub>	Nm/A <sub>ms</sub>	1,08
Back EMF Constant	K <sub>E</sub>	V <sub>ms</sub> /krpm	67
No-Load Speed		rpm	7000
Number of Poles	N <sub>p</sub>		10
Phase Connection			Y
Line-to-Line Resistance	R <sub>L</sub>	Ω	0,4
Line-to-Line Inductance	L <sub>L</sub>	mH	5,3
Electric Time Constant	T <sub>E</sub>	ms	13,2
Insulation Class			H
Thermal Resistance	T <sub>R</sub>	°C/W	1,7
External Diameter	OD	mm	170
Stator/Rotor Length	L	mm	28
Motor Length	TL	mm	55
Inertia	J	kg cm²	105
Weight	Wt	kg	4,2

The stator is a laminated steel core with a three phase windings. The high energy permanent magnets outer rotor configuration provides a more rigid structure for the permanent magnets and has higher inertia.

Advantages

- High torque due to large air gap radius,
- Stable low speed performance without feedback,
- Lower audible noise with reduced cogging.

Other Product Groups

As the company is established to customize different electrical machines there are many different products that ICPE can offer as following:

- Flat brushless servo motors,
- Precision small brushless motors,
- AC servo motors,
- Linear motors,
- Electric generators,
- 2-D robot tables.





# NANOMOTION

www.nanomotion.com

## COMPANY OVERVIEW

In 2005, Johnson Electric acquired Nanomotion Ltd to compliment its product line of dc motors with high precision piezo ceramic motors. Based on the principles of piezoelectricity, Nanomotion has designed a series of ultrasonic motors that have no moving parts and that have no extrinsic or intrinsic magnetic fields. In stall mode, the motors have no electrostatic fields as well. Furthermore, Nanomotion also designs and manufactures application specific motors for high volume applications that suit a wide range of micro mechanic specifications.

### ● Edge Motor

Nanomotion's Edge motor is the smallest industrial motor of its kind available in the marketplace today. Providing unlimited linear or rotary motion, the Edge motor offers extensive opportunities in applications that suit a wide range of industries. The Edge motor works with a uniquely designed, compact ASIC-based driver, and can be operated with any servo controller.



- Features
- ◆ Extremely small dimensions
  - ◆ Low power consumption
  - ◆ ASIC drive and control
  - ◆ Wide dynamic velocity range
  - ◆ Motor weight of 0.55g
  - ◆ Excellent move and settle characteristics
  - ◆ Inherent brake at power off

MOTOR PERFORMANCE SPECIFICATIONS							
	max velocity (mm/sec)	dynamic stall force (mN)	static hold force (mN)	static stiffness (Nμ)	preload on stage (N)	Kf Force constant (mn/volt commanded)	kv force (N • sec/m)
EM1-S-0	120	300	310	.075	1.8	30.5	1.6
EM1-V-0	120	300	310	.075	1.8	30.5	1.6

Note: All motor performance data is based on using Nanomotion ceramic motors and amplifiers


ENVIRONMENTAL	
◆ Maximum Velocity: 120 [mm/sec]	◆ Non-energized Stiffness: 0.06 to 0.09 [N/μ]
◆ Dynamic Stall Force: 300 [mN]	◆ Kfv: -1.6307 Nsec/m
◆ Static Holding Force: 300 to 320 [mN] (reference value)	◆ Offset: 2-3 [V] (driver dependent) Attainable
◆ Nominal Preload on Stage: 1.65 to 2.0 [N]	◆ Resolution: better than 100 nm
◆ 40.6 mN/VoH command with AB1 driver (+/-15% tolerance)	◆ Nominal Lifetime: 20,000 hours under nominal operating conditions
◆ Kf: 30.5 mN/VoH command with AB5 driver (+/-15% tolerance)	



COMPANY OVERVIEW

Panlink focuses on high end slip rings’ R&D and manufacturing for 16 years with nearly 100 employees and 3000 square meters production area. The company has powerful R&D and management team providing cutting edge design and process technology.

Product range is very diverse such as military, wind turbine, heavy machinery, large CT, hybrid slip rings etc. to worldwide clients.

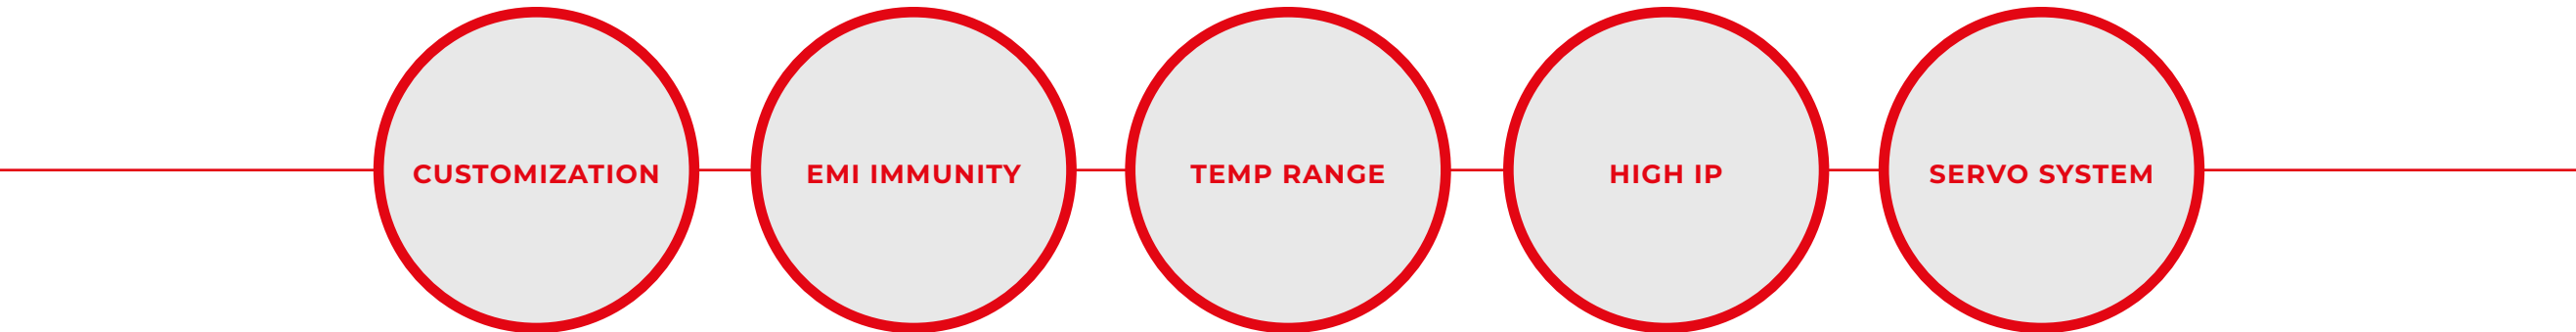

• Typical Applications

A slip ring can be used in any electromechanical system that requires unrestrained, intermittent or continuous rotation while transferring power and / or data.

- Defense
- Medical equipment
- Wind power
- Oil exploration
- Environment treatments
- Antenna systems
- Aviation & Navigation
- Robotics
- Port equipment
- Cable reel
- Offshore platform

• Slip Ring Solutions

- Support all kinds of signals and communication protocols.
- Electrical, FORJ, RF and media channels can be flexibly combinedEnvironment treatments.
- Experienced in slip ring solutions for used in SIEMENS and other brand servo-drive systems.
- Can provide suitable slip ring solutions for use in various harsh environments.

• Communication Protocol



• Practical Applications



Multi-channel air hybrid slip ring



Multi-channel FORJ



Servo system slip ring



Non-contacting slip ring



Pancake slip ring



• **Ultra Miniature Slip Rings for Airborne Fields**

**Recommended model: PSR-TM10S**

PSR-TM10S is the first ultra-miniature slip ring in China market. With 5.9mm dia x 7.62mm flange, it can provide 1~10 circuits power and signal transfer. Stainless steel housing, hard gold contact materials, V-shape groove design, low torque, low wear, ensure sensor and thermocouples etc. weak signals’ reliable transmission.

• **Typical Applications**

- Aircraft electro-optical pod
- Missile guidance system

• **Multi-circuits Military Slip Rings**

**Recommended model PSR-Ms**

PSR-Ms series SR are specially designed for space technology experiments. 60-200 circuits optional, can provide power, analog and high speed digital signals transfer. Compliant with EMC and 3D vibration proof, ensure power and signal’s stable transmission without interference

• **Typical Applications**

- Aerospace 3D simulation motion turntable

• **Hybrid Fiber-electrical Slip Rings**

SPEC
<div><div>▶ Contactless, no friction, long lifetime up to 50M revolutions</div><div>▶ Combine various signals - video, series data, network data</div><div>▶ No signal leakage, EMI immunity</div><div>▶ Support multi-channels high speed data transmission</div><div>▶ Small size, light weight, stainless steel, suitable for airborne or marine environments</div><div>▶ With pressure compensation, good sealing, can work in undersea</div><div>▶ 7000m or space environments</div></div>

PARAMETERS
<div><div><b>Fiber:</b> SM a or MM</div><div><b>Wavelength:</b> 650 - 1650 nm</div><div><b>Insertion loss:</b> &lt;2 dB (typical: &lt;0.5 dB)</div><div><b>Return loss:</b> &gt;40 dB (typical:45 dB, 2323 C), &gt;50 dB (MJXA)</div></div>











# DIAMOND SYSTEMS

www.diamondsystems.com

## COMPANY OVERVIEW

This guide presents a sample of our current standard product offerings. We welcome the opportunity to serve you with one of these products or a custom solution based on our vast library of technologies and our worldwide design and manufacturing resources.

### Nvidia Solutions

	FLOYD	ZIGGY	JETHRO	STEVIE	ELTON	
						
Jetson Module	Nano&Xavier NX	TX2/TX2i	TX2/TX2i	AGX Xavier	AGX Xavier	
Camera	3x CSI-2 4-lane ports	N/A	2x CSI 4-lane	8x CSI 2-lane	8x CSI 2-lane	
Display	2x HDMI	1x HDMI	1x HDMI	2x HDMI	1x HDMI, 1x LVDS	
Mass Storage	mPCIe	Micro SD	M.2 SATA 2242	M.2 PCIe x4 NVMe 2280	M.2 PCIe x4 NVMe 2242	
	M.2 NVME 2280		Micro SD			
	Micro SD					
Serial Ports	2x RS-232/422/485	2x RS-232	2x RS-232	2x RS-232	2x RS-232	
USB	1x USB 3.0	1x USB 3.0	N/A	1x USB 3.0	2x USB 3.0	
	2x USB 2.0	1x USB 2.0		2x USB 2.0	2x USB 2.0	
Ethernet	2x GbE with PoE	1x GbE	1x GbE	2x GbE	2x GbE	
CAN	1	N/A	N/A	2	2	
Integrated GPIO	8	13	13	13	13	
Integrated DAQ	N/A	6x 12-16-bit A/D	6x 12-16-bit A/D	6x 12-16-bit A/D	6x 12-16-bit A/D	
		2x 12-bit D/A	2x 12-bit D/A	2x 12-bit D/A	2x 12-bit D/A	
Expansion	1x PCIe/USB MiniCard	N/A	1x PCIe/USB MiniCard	1x PCIe/USB MiniCard	1x PCIe/USB MiniCard	
			SkyWire Modem Socket		SkyWire Modem Socket	
					1x PCIe x8	
					4x PCIe x1	
					PCI Bus Links	
Size	143x76 mm	63x67x96 mm	76x107 mm	100x87 mm	102x152 mm	



EPSM-10GX4

EPS-24G4X

EPS-12G2

EPS-12000-CM

EPS-8100

PRODUCT	DESCRIPTION	COPPER PORTS	FIBER PORTS	FORM FACTOR	DIMENSIONS	NOTES
EPS-8100	Layer 2+ managed 8-Port Gigabit Ethernet switch	8	x	PC/104	90mm x 96mm	Industry-leading rugged compact switch for vehicle applications
EPS-12G2	Layer 2+ managed 12-Port Gigabit Ethernet Switch	12	2x1G/2.5G	COM Express	95mm x 125mm	Economical 12 port rugged switch with dual fiber backbone capability
EPS-12G1	Layer 2+ managed 12-Port Gigabit Ethernet Switch	12	1x1G/2.5G	COM Express	95mm x 125mm	Economical 12 port rugged switch with fiber uplink
EPS-12G0	Layer 2+ managed 12-Port Gigabit Ethernet Switch	12	x	COM Express	95mm x 125mm	Economical 12-port rugged switch



<b>EPS-12G0</b>	Layer 2+ managed 12-Port Gigabit Ethernet Switch	12	x	COM Express	95mm x 125mm	Economical 12-port rugged switch
<b>EPS-12000-CM</b>	Layer 2+ / Layer 3 managed 12-Port Gigabit Ethernet Switch	12	x	COM Express Mini	84mm x 55mm	Ultra-compact, rugged, IEEE-1588 capable
<b>EPS-24016-104</b>	Layer 2+ managed 16-Port Gigabit Ethernet switch	16	x	PC/104	90mm x 96mm	High port density, rugged design
<b>EPS-24026-104</b>	Layer 2+ managed 26-Port Gigabit Ethernet switch	24	2x1G/2.5G	PC/104	90mm x 96mm	High port density, rugged design
<b>EPSM-10GX4</b>	Layer 2+ / Layer 3 managed 28-Port Gigabit Ethernet switch module	24	4 10G	COM Express Mini	84mm x 55mm	Switch module for custom solutions; Layer 3 and IEEE-1588 capability
<b>EPS-24G4X</b>	Layer 2+ / Layer 3 managed 28-Port Gigabit Ethernet Switch	24	4 10G	--	146mm x 102mm	Full featured switch, 10G Layer 3 and IEEE-1588 capability

### Rugged Systems

The SABRE family offers rugged mission computers and Ethernet switches for use in the most challenging vehicle environments. MIL-STD-461, 704, and 1275 compliance is available. Systems have been tested to MIL-STD-810G specifications up to 75G shock.

ETHERNET SWITCHES	SABRENET 12000	SABRENET 24000	SABRENET 24G2X
Copper ports	12x 1G	24x 1G	24x 1G
Fiber ports	N/A	N/A	2x 10G
Input voltage	6-34VDC	5-34VDC	5-34VDC
PTP option	Yes	Yes	Yes
Dimensions mm	162Wx137Dx66H	198Wx175Dx66H	198Wx175Dx66H



COMPUTERS	SABRECOM VNS	SABRECOM ARS	SABRECOM ZTA
Processor	Skylake 6th Gen Core i7 i7-6600U 2C 2.6GHz	Bay Trail E3845 2C 1.91GHz	Bay Trail E3845 Apollo Lake E3940/N4200
RAM	4-20GB	4GB	4-8GB
Mass storage	32-256GB SSD	32-256GB SSD	32-256GB SSD
Serial ports	4x RS-232/422/485	4x RS-232/422/485	4x RS-232/422/485
USB ports	4x USB 2.0, 2x USB 3.0	2x USB 2.0	4x USB 2.0, 1x USB 3.0
Ethernet	2x 10/100/1000	2x 10/100/1000	2x 10/100/1000
Integrated GPIO	16	16-24	16-24
Integrated data acquisition	N/A	16x 16-bit A/D 4x 16-bit D/A	16x 16-bit A/D 4x 16-bit D/A
Expansion	PCIe/104, PCI-104, and MiniCard sockets	PC/104-Plus: ISA & PCI 1x MiniCard	1x PCIe/USB MiniCard 1x M.2 SATA socket
Standard enclosure size	198W x 175D x 66H mm	198W x 175D x 66H mm	162W x 137D x 66H mm
Operating system support	Windows 10 IOT LTSC; Linux Ubuntu 16.04 LTS; 64-bit support	Windows 7/10; Linux Ubuntu 16.04 LTS; 32/64-bit support	Windows 7/10; Linux Ubuntu 16.04 LTS; 32/64-bit support

### I/O Expansion Modules









Diamond Systems offers a wide range of I/O modules in PC/104 and PCIe MiniCard form factors. Our analog and digital I/O modules are supported by our industry-leading Universal Driver software, consisting of a C language programming library along with example programs and GUI demos that provide instant verification of system operation. All products meet -40°C to +85°C operating temperature.







● I/O Expansion Modules

Diamond Systems offers a wide range of I/O modules in PC/104 and PCIe MiniCard form factors. Our analog and digital I/O modules are supported by our industry-leading Universal Driver software, consisting of a C language programming library along with example programs and GUI demos that provide instant verification of system operation. All products meet -40°C to +85°C operating temperature.

ANALOG I/O														
Product	Form Factor	#A/D	Res	Max	Min	Gain	Max	Autocal	FIFO	#D/A	Res	Max	Min	GPIO
DMM-32DX-AT	PC/104	32 SE, 16 DI	16	±10V	0-.625V	Program	250K	Auto	1024	4	16	±10V	0-5V	24 I/O
DMM-32X-AT	PC/104	32 SE, 16 DI	16	±10V	0-.625V	Program	250K	Yes	1024	4	12	±10V	0-5V	24 I/O
DMM-16R-AT	PC/104	16SE, 8 DI	16	±10V	0-1.25V	Program	100K	Yes	512	4	12	±10V	0-5V	8 In, 8 Out
DMM-16RP-AT	PC/104-Plus	16SE, 8 DI	16	±10V	0-1.25V	Program	100K	Yes	512	4	12	±10V	0-5V	8 In, 8 Out
DMM-AT	PC/104	16SE, 8 DI	12	±10V	0-1.25V	Program	100K	Yes	512	2	12	±10V	0-5V	8 In, 8 Out
DMM-XT	PC/104	16SE, 8 DI	12	±10V	0-1.25V	Jumper	100K			2	12	0-5V	0-5V	8 In, 8 Out
DS-MPE-DAQ0804	MiniCard	8SE, 4 DI	16	±10V	0-5V	Program	100K		2048	4	16	0-5V	0-2.5V	14 I/O
RMM-1616A-XT	PC/104									16	16	Voltage ranges: ±10V, ±5V, 0-10V, 0-5V		48 I/O
RMM-816A-XT	PC/104									8	16			48 I/O
RMM-416A-XT	PC/104									4	16			48 I/O
RMM-1616AP-XT	PC/104-Plus									16	16	Current ranges: 0-20mA, 0-24mA, 4-20mA		48 I/O
RMM-816AP-XT	PC/104-Plus									8	16			48 I/O
RMM-416AP-XT	PC/104-Plus									4	16			48 I/O

			
DMM-32DX-AT	DMM-16RP-AT	RMM-1616AP-XT	GPIO-MM-XT
			
DS-MPE-DAQ0804	DS-MPE-GE210 Ethernet Minicard	DS-MPE-GPIO	DS-MPE-CAN2L Ethernet Minicard

DIGITAL I/O											
Product	Form Factor	#GPIO	Voltage	Buffered	Direction	Opto	Relays	Load	Counters	Ctr Bits	Max Rate
OMM-XT	PC/104	48	5V		Programmable				3	16	10MHz
OMM-DIO-XT	PC/104	48	5V		Programmable						
GPIO-MM-XT	PC/104	100	5V	Yes	Programmable				10	16	10MHz
DS-MPE-GPIO	MiniCard	36	5V/3.3V	Yes	Programmable				8	32	50MHz
PMM-P	PC/104						16 SPDT	30VDC/2A			
OPMM-1616-XT	PC/104					16 In 3-30VDC	16 SPDT	30VDC/2A			
IR104-PBF	PC/104					20 In 3-24V	20 SPST	30VDC/5A			

			
EMM-8EL-XT	EMM-8P-XT	EMM-8PLUS-XT	EMM-4M-XT
			
EMM-OPT4-XT	DS-MPE-SER4M	DS-MPE-OPT4232	



COMPANY OVERVIEW

Electric Encoder™ Netzer’s world-wide patented, rugged high performance Electric Encoder™ technology, suits a wide variety of applications ranging from space and avionics, through military and defense, to instrumentation and automotive. The product portfolio includes Rotary & Linear absolute or incremental position encoders, with analog or digital outputs.

The Non-contact, absolute-position relies on interaction between the measured displacement and an internally shielded, space/time modulated, electric field and offers features unsurpassed by traditional optical and magnetic encoders.

- Advantages of Electrical Encoders

• Simple, robust structure with a virtually no-failure-mechanism,

• Very low weight, inertia, and profile ( $\leq 10\text{mm}$ ),

• Ring shaped, hollow shaft with a wide range of diameters,

• Precision to  $0.001^\circ$  in selected models,


• Default operation range from  $-55^\circ\text{C}$  to  $+125^\circ\text{C}$ ,

• Insensitivity to EMI/RFI and magnetic fields,


• Ultra-high-speed options,

• Wide variety of position feedback protocols.

• The company has structured its product range based

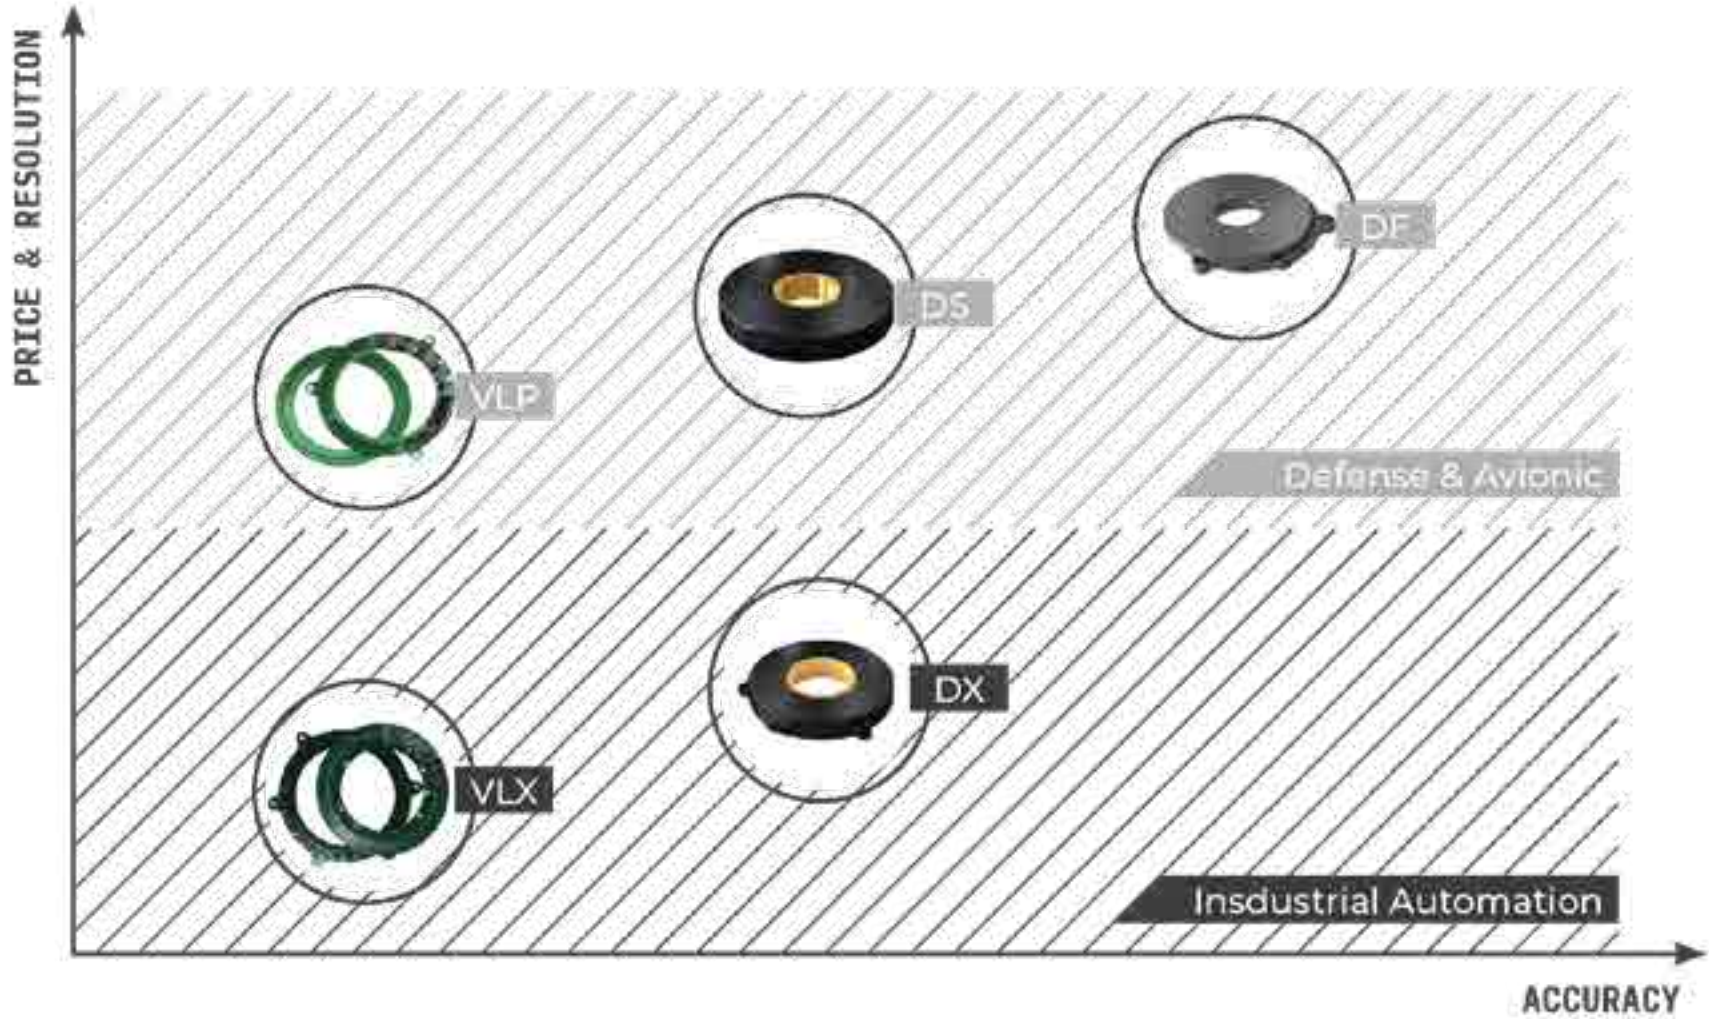


The company has structured its product range based on price performance criteria for different types of applications. For industrial applications DX and VLX products; for defense and avionic applications VLP, DS and DF products are available.

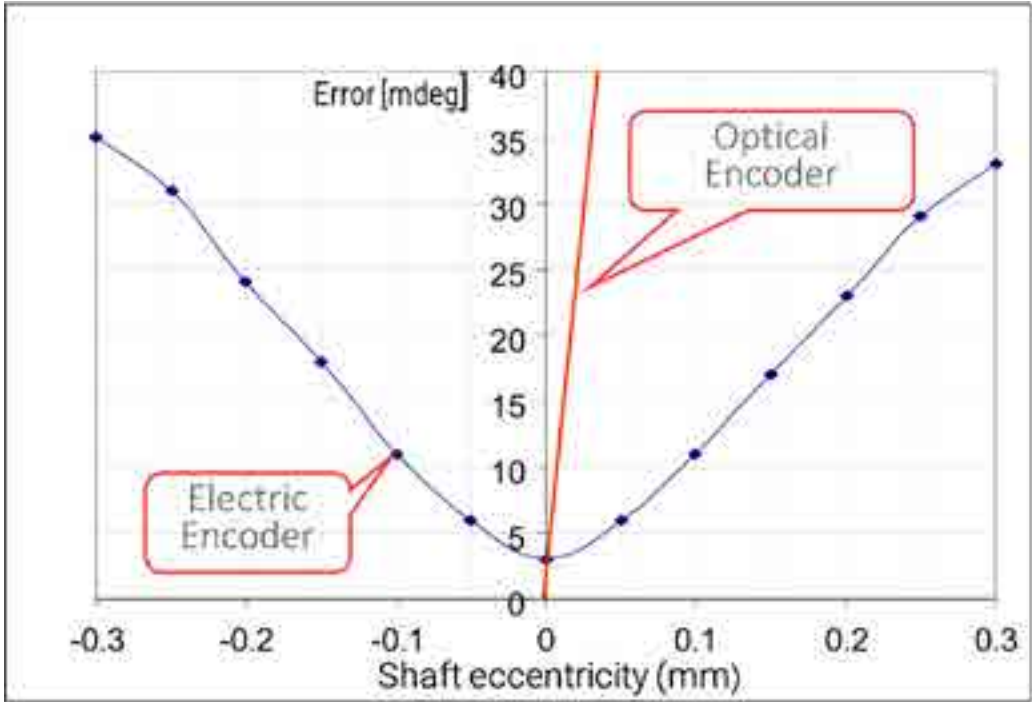

Netzer products are also verified with their high MTBF as shown in below diagram.

T (°C)	MTBF (HOURS)		
	GF (ground fixed)	GM (ground mobile)	SF (space flight)
25°	4,300,000	2,000,000	1,500,000
85°	450,000	300,000	750,000

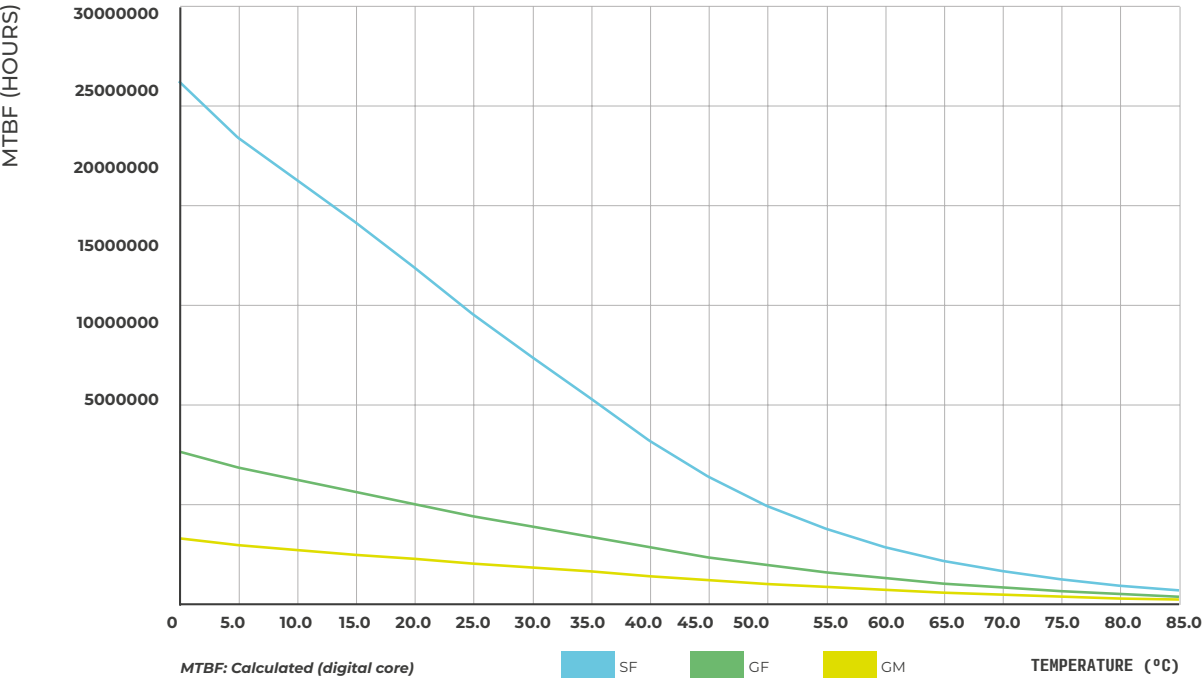



COMPANY OVERVIEW

SECO SpA is a technology company that building solutions and technologies to enable a new generation of digital devices. From Edge Computing, to IoT, to AI, their comprehensive and modular offering suits the needs of customers who are looking for a partner to maximize the potential of their products and fully leverage new technological opportunities.

HMI

Product catalog includes Human Machine Interface products.



Fanless Embedded Computers

With off-the-shelf solutions, cloud-agnostic and also ideal for Industrial IoT applications.



Computer On Modules

These products have advantages of long-term availability, highly configurable, scalable and are in consolidated standards. There are types of COM-HPC, COM Express, Qseven, Smarc, ETX, Myon Micromodule and Trizeps SODIMM SOMs.

COM-HPC



COM-EXPRESS



QSEVEN




SMARC



MYON MICROMODULE SOM



TRIZEPS SODIMM SOM



3.5" SBC



EMBEDDED NUCTM



OTHER FORM FACTOR SBC



PICO-ITX



DEVELOPMENT KITS FOR RAPID POC



Dev Kits, Carrier Boards and Accessories

DEVELOPMENT AND STARTER KITS

There are kits for almost all types of COM Modules.



CARRIER BOARDS

There are carrier boards for COM Express, Qseven, Myon and Trizeps Carrier Boards.



ACCESSORIES

There are types of accessories including CAB Kit, Display Kit, Heat Spreaders, power supply kit, Wi-Fi Kit and other accesories such as camera module, table support etc.





# SEALEVEL


www.sealevel.com

## COMPANY OVERVIEW

Sealevel is one of the lead designer and manufacturer of critical communication products, I/O, industrial computers and embedded products/modules since 1986.

### USB Hubs & Isolators

Sealevel industrial USB hubs are designed for rugged applications requiring a wide operating temperature range and long-term availability.

USB HUBS	SEALSO USB ISOLATORS
	

### MIL-STD 1553

These type of products, IP cores and custom computer designs are specifically engineered for military, avionics and aerospace applications. Sealevel can provide products having ARINC429 standards.









### Digital & Analog I/O

Monitor and control real-world signals with any computer using Sealevel digital and analog I/O products.

USB DIGITAL I/O	ETHERNET
	
Seal/I/O	PCIe
	
PCI	
	

### Serial I/O

Sealevel asynchronous and synchronous serial interfaces are designed for high-speed applications and support RS-232, RS-422, RS-485, and RS-530 electrical interface standards. Product groups can have options from 1 port, up to 16 ports.

USB SERIAL ADAPTERS	ETHERNET SERIAL SERVERS
	
PCIe ASYNCHRONOUS SERIAL ADAPTERS	PCIe SYNCHRONOUS SERIAL ADAPTERS
	
PCI ASYNCHRONOUS SERIAL ADAPTERS	PCI SYNCHRONOUS SERIAL ADAPTERS
	

### Embedded Computing

Sealevel can provide COM Express Modules and its carrier boards, industrial box PCs and Panel PCs.

TOUCH PANEL COMPUTER	INDUSTRIAL COMPUTERS
	
	COMPUTER ON MODULE
	



● **ACC-188**

Sealevel's family of ACC-188 synchronous serial radio adapters provide interoperability among all the various radio brands and models used by the defense community.



● **Industrial IoT**

Sealevel's Industrial IoT (Internet of Things) hardware and software products are changing and improving several industries through remote data monitoring, predictive analysis, and real-world automation



● **Accessories**

Sealevel has a wide range of accessory list which can provide the sustainability of serial and digital I/O application requirements.

ADAPTERS & CONVERTERS	CABLES	COMPUTER STORAGE	ETHERNET NETWORKING
			
MOUNTING HARDWARE	POWER SUPPLIES	RELAY RACKS & RELAYS	SeaRAQ I/O
			
SOFTWARE	TERMINAL BLOCKS		
			





**[www.sacaeurope.com](http://www.sacaeurope.com)**

**[info@sacaeurope.com](mailto:info@sacaeurope.com)**

**The Netherlands**

**Steenowenweg 5, 5708HN, Helmond**

**+31 492 218 972**

**Poland**

**Wspólna 70, Mazowieckie 00-687, Warsaw**

**+48 221 822 534**