



Over hundred years of commercial journey, Topçu Holding has contributed to industrialization and globalization processes of our country and has always maintained its pioneering position in machinery, construction, energy, hardware sectors with its stability and commitment to ethical values. Combining the trust gained from the past with innovative and dynamic approaches, Topçu Holding follows technological developments and offers products of carefully selected global brands to industry and production world.

Embracing the concept "Strength lies in unity", Topçu Holding represents products of more than hundred global brands through its dealers network within Turkey; besides, with the studies of R&D department develops, designs and manufactures products supplied to local and global markets. Topçu Holding is always proud of its contribution to national economy and employment.

Topçu Holding carries out its activities with focusing on customer satisfaction, sustainability and social responsibility and continuously creates value for its customers, solution partners, employees and society.

As Topçu Holding, we are aware of our historical, national and cultural responsibility. Therefore we are always committed to progress and contribute to our country with our distributorship of global brands, determination of economic development with local national production facilities and increasing employment opportunities.



With its well known brand, Topçular Endüstriyel Üretim ve Yatırım A.Ş. was established to provide quality solutions to the basic machinery needs of the manufacturing industry.

With its strong and wide industry experience, Topçular Endüstriyel Üretim ve Yatırım A.Ş. continues its activities as a domestic production-oriented company. Ozco branded products are supplied to the local market and exported to many countries. At our facility in Istanbul Sancaktepe; We carry out our Sales, Management, After-sales, and Logistics services, meanwhile, we manufacture our band saw machines in our plant located in Konya city. Within our domestic production activities, we supply machinery to different industries, and with the wide range of high-quality products developed as a result of joint engineering studies with global manufacturers we contribute to our country's economy.

Topçular Endüstriyel Üretim ve Yatırım A.Ş. with its continuous and growing investments supports employment and successfully represents our country in international markets. We are constantly updating ourselves by following the global technological trends and with our successful projects, we establish stronger sector connections, offer the most compliant solutions, and take firm steps towards becoming a global brand.

Our History

The Topçu family entered commercial life when Ali Reis Topçu left the captain's office in the late 1800s and started wholesale food - weighbridge sales in Rize.

In 1923, Dursun Topçu, who was the first driver of Rize, started the hardware-glass trade, and the development in commercial life continued. The third generation, Mehmet, Yaşar, İbrahim, and İsmail Topçu brothers; In addition to the sale of construction materials, hardware, glass, and electrical materials started the manufacturing of rubber shoes.

The family founded Mehmet-Yaşar Topçu and Brothers Collective Company in Istanbul in 1957, which later turned into Topçular Hardware Company, and shifted its business to Istanbul in 1966.

Reis Makina, which carries out its activities mostly based on the Turkish distributorship of well-known foreign products in international markets, started its operations in Karaköy-Istanbul in 1981 as the second company of the family.

Since 1992, Reis Makine had undertaken the Turkey distributorship of Makita Corporation, one of the world's largest manufacturers of power tools. Reis Makina, by taking out the distributorship of many other global brands besides Makita, expanded its current business volume further by moving its headquarters from Karaköy Persembe Market to Sancaktepe in 2005.

After the merger of all hardware tools and activities under the roof of Reis Makina in 2018, Topçular Hırdavat established Topçular Endüstriyel Üretim ve Yatırım A.Ş company. The Company started its activities with a vision of providing innovative solutions without compromising on quality and developing strategies specific to its sector and took over the Ozco brand from its sister company, Reis Makina, in 2021. In the same year, the production of tapping benches in the Istanbul/Sancaktepe center and band saws in the Konya facility were started. In addition to domestic production, the Ozco brand has reached the widest machine tool portfolio in Turkey with nearly 250 machines from more than 20 global manufacturers.

Our brand Ozco continues to grow with confidence by achieving extraordinary success in domestic and international markets.



MANUEL BANDSAW MACHINE

T200



• Angle cut up to 45° from vice



• 32-64 m/min 2 speed step



• Coolant system



• Hydraulic system allowing the easy adjustment of the downward travel of the head and the feeding speed.

- Switch system that stops the saw after cutting
- 45° angle setting
- Coolant system
- Wheel system that provides mobility to the machine
- Hydraulic feeding system
- CE standard

Standard Accessories

- Adjustable support arm
- Bi-metal saw blade mounted on the machine
- Wheel system



| MODEL | T200 |
|---------------------------------------|--------------------------------------|
| Main Motor Power | 850 W, 380 V |
| Cutting Angle | 0°-45° |
| Cutting Angle Adjustment | From Vice |
| Head descent speed regulation/feeding | Hydraulic |
| Blade Dimensions | 20x0,9x2360 mm |
| Cutting Capacity 0° | ● 200 mm; ■ 200x200 mm; ■ 120x300 mm |
| Cutting Capacity 45° | ● 120 mm; ■ 120x120 mm; ■ 120x150 mm |
| Speed | 32/64 m/min |
| Step | 2 |
| Machine Dimensions | 1065x655x1160 mm |
| Weight | 140 kg |
| | |

Optional Accessories:

Replacement saw band: 23605/8

Made in

20x0,9x2360mm-5/8 tpi

23606/10 20x0,9x2360mm-6/10 tpi

236010/14



20x0,9x2360mm-10/14 tpi

Topçular Endüstriyel Üretim ve Yatırım A.Ş. reserves the right to make changes in model, technical specifications, color, equipment & accessories without prior notice.



 \triangleleft \triangleright











MANUEL BANDSAW MACHINE

T225MV

- Unlimited steps between 21-84 mt/min with inverter speed regulation/Vario system
- · Digital speed display
- Hydro-mechanical band tensioning and saw pressure gauge
- Angle cut the hub up to 60°
- Ergonomic control panel providing ease of use
- Specially designed cast iron pulleys
- High quality hydraulic system that adjusts the feed rate
- High quality main motor, strong reducer structure
- Efficient coolant pump motor
- High quality electrical system
- Chip brush
- CE standard

Standard Accessories

- Adjustable support arm
- Bi-metal saw blade mounted on the machine










• Hydraulic system which allows easy adjustment of downward travel and



· Convenient hydro-mechanical band tensioning

and saw pressure gauge



| MODEL | T225MV | |
|-----------------------|-------------------------------|--|
| Motor Power | 1,1 kW, 380 V | |
| Swivel Head | 0°-60° | |
| Cutting Angle Setting | Miter Cutting | |
| Feed Rate Adjustment | Hydraulic | |
| Blade Dimensions | 27x0,9x2460 mm | |
| Cutting Capacity 0° | ● 225mm; ■ 195x195 mm; | |
| | 2 65x150mm | |
| Cutting Capacity 45° | ● 150mm; ■ 150x150mm; | |
| | ■ 200x135mm | |
| Cutting Capacity 60° | ● 90mm; ■ 85x85mm | |
| Speed | 21 - 84 m/min | |
| Step | Inverter / Variable | |
| Machine Dimensions | 1650x610x1092 mm | |
| Weight | 215 kg | |

Made in

Optional Accessories:

Replacement saw band:

24605/8

27x0,9x2460mm-5/8 tpi


24606/10 27x0,9x2460mm-6/10 tpi

24608/12 27x0,9x2460mm-8/12 tpi

246010/14 27x0,9x2460mm-10/14 tpi



Topçular Endüstriyel Üretim ve Yatırım A.Ş. reserves the right to make changes in model, technical specifications, color, equipment & accessories without prior notice.





ozcomakina





TS275D

DUAL MITRE CUTTING

Angle adjustment from the hub up to 45° rear, up to 60° front/2-way swivel

head angle cutting, up to 45° left and up to 60° right

Automatic clamping

Hydraulic/Automatic clamping

Hydraulic/Automatic head movement

Manual feeding

- Unlimited steps between 20-80 mt/min with inverter speed regulation/Vario system
- Digital speed display
- · Single cutting line in the vise
- LED-Light illuminating the cutting area
- Hydro-mechanical band tensioning and saw pressure gauge
- Ergonomic control panel providing ease of use
- Special design cast pulleys
- High quality hydraulic system adjusting the feeding speed
- High quality main motor, strong reducer structure
- High quality electrical system

Standard Accessories: • Adjustable support arm • Bi-metal saw blade mounted on

• 3 Roll 1mt material stand

the machine

- · Chip brush
- CE standard





| MODEL | TS275D | | | |
|-----------------------|----------------------------------|--|--|--|
| Motor Power | 1,5 kW, 380 V | | | |
| Swivel Head | -45°/+60° | | | |
| Cutting Angle Setting | Adjustment Miter Cutting | | | |
| Feed Rate Adjustment | Hydraulic | | | |
| Blade Dimensions | 27x0,9x3160 mm | | | |
| Cutting Capacity 0° | ● 275mm ■ 275x275 mm ■ 350x150mm | | | |
| Cutting Capacity 45° | ● 180mm ■ 160x160mm ■ 260x120mm | | | |
| Cutting Capacity 60° | ● 120mm ■ 120x120mm ■ 140x120mm | | | |
| Saw Blade Dimensions | 27x0,9x3160mm | | | |
| Speed | 20-80 m/min | | | |
| Step | Inverter / Variable | | | |
| Material Stand Height | 960 mm | | | |
| Clamp Opening Range | 350 mm | | | |
| Clamp Height | 145 mm | | | |
| Hydraulic Motor Power | 0.18 kW | | | |



Optional Accessories:

Replacement saw band: 36103/4

27x0,9x3160mm- 3/4 tpi

31604/6

27x0,9x3160mm- 4/6 tpi

31605/8 27x0,9x3160mm-5/8 tpi



Topçular Endüstriyel Üretim ve Yatırım A.Ş. reserves the right to make changes in model, technical specifications, color, equipment & accessories without prior notice.

0 12 kW

1500x1750x1050 mm

460 kg



4

Coolant Motor Power

Machine Dimensions







TS300


STRAIGHT CUTTING

• Unlimited steps between 20-100 mt/min with inverter speed regulation/Vario system

- Digital speedometer
- Ergonomic control panel providing ease of use.
- Special design cast pulleys
- Hydro-mechanical band tensioning
- · High quality main motor
- Special designed strong reducer structure

• Reinforced material sliding system and long-lasting roller balls with specially designed double bearing system.

- Adjustable vice pressure system
- Band saw system with double bearing structure that increases the cutting precision
- · Efficient coolant pump motor
- Chip brush
- High quality electrical system
- CE standard

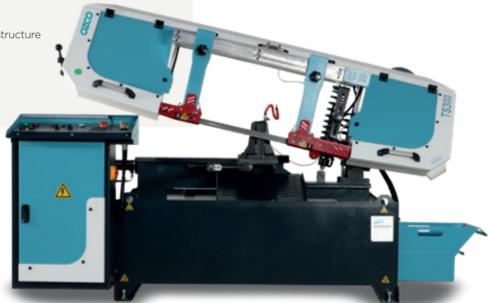



Standard Accessories

- 5 Roll material stand 1,5 mt
- Bi-metal saw blade mounted on the machine

| MODEL | TS300 |
|-------------------------|--|
| Motor Power | 1,5 kW, 380 V |
| Cutting Angle | - |
| Vice Clamping | Hydraulic |
| Cutting Capacity | ● 300mm; ■ 300x300 mm; ■ 300x350 mm |
| Saw Blade Dimensions | 27x0,9x3660mm |
| Speed | 20 - 100 m/min |
| Step | Inverter / Variable |
| Material feeding height | 760 mm |
| Clamp Opening Range | 0 - 375 mm |
| Clamp Height | 190 mm |
| Driving Motor Power | 0.37 kW |
| Hydraulic Motor Power | 0.18 kW |
| Cooling Engine Power | 0.12 kW |
| Machine Dimensions | 1275x2005x1260 mm |
| Weight | 665 Kg |



TS300 (Semi-Automatic

Hydraulic/Automatic material clamping

Hydraulic/Automatic head

Manuel material feeding

Optional Accessories:

Replacement saw band:

36603/4 27x0,9x3660mm- 3/4 tpi

36604/6 27x0,9x3660mm-4/6 tpi

36605/8 27x0,9x3660mm-5/8 tpi

Topçular Endüstriyel Üretim ve Yatırım A.Ş. reserves the right to make changes in model, technical specifications, color, equipment & accessories without prior notice.



ozcomakina





TS360

STRAIGHT CUTTING

- Unlimited steps in the range of 14-100 mt/min with inverter speed regulation/Vario system
- Digital speedometer
- Ergonomic control panel providing ease of use.
- Material support
- Special design cast pulleys
- Hydro-mechanical band tensioning
- · High quality main motor
- · Adjustable vice pressure system
- Band saw system with double bearing structure that increases the cutting precision.
- · Efficient coolant pump motor
- Chip brush
- High quality electrical system
- CE standard

TS360 (Semi Automatic-Straight Cut)

Hydraulic/Automatic material clamping Hydraulic/Automatic head travel Manuel material feeding





- 5 Roll material stand 1.5 mt
- Bi-metal saw blade mounted on the machine

| machine | | | |
|-------------------------|--|--|--|
| | | | |
| MODEL | TS360 | | |
| Motor Power | 2,2 kW, 380 V | | |
| Cutting Angle | - | | |
| Vice Clamping | Hydraulic | | |
| Saw Blade Dimensions | 34x1,1x4560mm | | |
| Cutting Capacity 0° | ● 360mm; ■ 360x360 mm; ■ 400x300 mm | | |
| Speed | 14 - 100 m/min | | |
| Step | Inverter / Variable | | |
| Material feeding height | 760 mm | | |
| Clamp Opening Range | 0 - 450 mm | | |
| Clamp Height | 230 mm | | |
| Hydraulic Motor Power | 0.18 kW | | |
| Cooling Engine Power | 0.12 kW | | |
| Machine Dimensions | 2470x1350x1300 mm | | |
| Weight | 775 Kg | | |



Made in

Optional Accessories:

Replacement saw band:

45603/4 34x1,1x4560mm- 3/4 tpi

45604/6 34x1,1x4560mm- 4/6 tpi

45605/8 34x1,1x4560mm- 5/8 tpi

Topçular Endüstriyel Üretim ve Yatırım A.Ş. reserves the right to make changes in model, technical specifications, color, equipment & accessories without prior notice.



 \triangleleft \triangleright











TS300M


MITRE CUTTING

- Unlimited steps between 20-100 mt/min with inverter speed regulation/Vario system
- · Digital speedometer
- · Ergonomic control panel providing ease of use.
- Special design cast pulleys
- Hydro-mechanical band tensioning
- · High quality main motor
- Special designed strong reducer structure
- Reinforced material sliding system and long-lasting roller balls with specially designed double bearing system.
- Adjustable vice pressure system
- Band saw system with double bearing structure that increases the cutting precision.
- Efficient coolant pump motor
- · Chip brush
- · High quality electrical system
- CE standard

Standard Accessories

- 5 Roll material stand 15 mt
- Bi-metal saw blade mounted on the machine



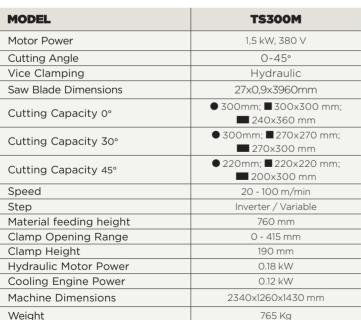

TS300M (Semi Automatic-Miter Cutting)

Hydraulic/Automatic material clamping Hydraulic/Automatic head travel Manual material feeding



Made in

Optional Accessories:

Replacement saw band: **39603/4**

27x0,9x3960mm- 3/4 tpi

39604/6 27x0,9x3960mm- 4/6 tpi

39605/8 27x0,9x3960mm- 5/8 tpi




Topçular Endüstriyel Üretim ve Yatırım A.Ş. reserves the right to make changes in model, technical specifications, color, equipment & accessories without prior notice.



TS360M

MITRE CUTTING

- Unlimited steps in the range of 14-100 mt/min with inverter speed regulation/Vario system
- Angle adjustment from vise up to 45°
- Digital speedometer
- Ergonomic control panel providing ease of use.
- Material support
- Special design cast pulleys
- Hydro-mechanical band tensioning
- · High quality main motor
- Adjustable vice pressure system
- Band saw system with double bearing structure that increases the cutting
- Efficient coolant pump motor
- Chip brush
- · High quality electrical system
- CE standard

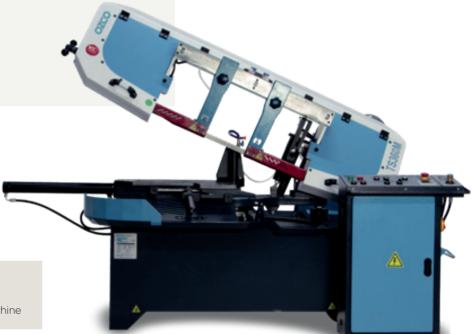



Standard Accessories

- Double Roll material stand 40 cm
- 5 Roll material stand 1.5 mt
- Bi-metal saw blade mounted on the machine

| MODEL | TS360M | | |
|-------------------------|--|--|--|
| Motor Power | 2,2 kW, 380 V | | |
| Cutting Angle | 0°-45° | | |
| Vice Clamping | Hydraulic | | |
| Saw Blade Dimensions | 34x1,1x4560mm | | |
| Cutting Capacity | ● 360mm; ■ 360x360 mm; ■ 400x300 mm | | |
| Speed | 14 - 100 m/min | | |
| Step | Inverter / Variable | | |
| Material feeding height | 760 mm | | |
| Clamp Opening Range | 0 - 520 mm | | |
| Clamp Height | 230 mm | | |
| Hydraulic Motor Power | 0.18 kW | | |
| Cooling Engine Power | 0.12 kW | | |
| Machine Dimensions | 2620x1460x1300 mm | | |
| Weight | 850 Kg | | |

 \triangleleft \triangleright

Made in

TS360M (Semi-Automatic)

Hydraulic/Automatic material clamping

Hydraulic/Automatic head

Manuel material feeding

Optional Accessories:

Replacement saw band:

45603/4 34x1,1x4560mm- 3/4 tpi

45604/6 34x1,1x4560mm-4/6 tpi

45605/8 34x1,1x4560mm-5/8 tpi



Topçular Endüstriyel Üretim ve Yatırım A.Ş. reserves the right to make changes in model, technical specifications, color, equipment & accessories without prior notice.









ozcomakina





FULL-AUTOMATIC BANDSAW MAC

TA300

STRAIGHT CUTTING

- Unlimited steps in the range of 20-100 mt/min with inverter speed regulation/

 TA300 Vario system
- Digital speedometer
- Ergonomic control panel providing ease of use.
- Special design cast pulleys
- · Hydro-mechanical band tensioning
- · High quality main motor
- Special designed strong reducer structure
- Reinforced material sliding system and long-lasting roller balls with specially designed double bearing system.
- Adjustable vice pressure system
- Band saw system with double bearing structure that increases the cutting precision
- · Efficient coolant pump motor
- · Chip brush

• High quality electrical system

• CE standard





| MODEL | TA300 | | |
|-------------------------|--|--|--|
| Motor Power | 1,5 kW, 380 V | | |
| Cutting Angle | - | | |
| Vice Clamping | Hydraulic | | |
| Saw Blade Dimensions | 27x0,9x3660mm | | |
| Cutting Capacity | ● 300mm; ■ 300x300 mm; ■ 250x375 mm | | |
| Speed | 20 - 100 m/min | | |
| Step | Inverter / Variable | | |
| Material feeding height | 760 mm | | |
| Clamp Opening Range | 0 - 375 mm | | |
| Clamp Height | 190 mm | | |
| Driving Motor Power | 0.37 kW | | |
| Hydraulic Motor Power | 0.18 kW | | |
| Cooling Engine Power | 0.12 kW | | |
| Machine Dimensions | 2005x1260x1275 mm | | |
| Weight | 695 Kg | | |

(Full Automatic-Straight Cut Hydraulic/Automatic material clamping

Made in

Hydraulic/Automatic head travel

Automatic material feeding

- **Standard Accessories** • 5 Roll material stand 1.5 mt
- Double Roll material stand 400 cm
- Bi-metal saw blade mounted on the machine

Optional Accessories:

Replacement saw band:

36603/4

27x0,9x3660mm- 3/4 tpi

36604/6 27x0,9x3660mm-4/6 tpi

36605/8

27x0,9x3660mm-5/8 tpi

OZCO H42-4

Topçular Endüstriyel Üretim ve Yatırım A.Ş. reserves the right to make changes in model, technical specifications, color, equipment & accessories without prior notice.



FULL-AUTOMATIC BANDSAW MACHINE

TA360

STRAIGHT CUTTING

- Unlimited steps in the range of 14-100 mt/min with inverter speed regulation/Vario system
- Digital speedometer
- Ergonomic control panel providing ease of use.
- Material support
- Special design cast pulleys
- · Hydro-mechanical band tensioning
- · High quality main motor
- Special designed strong reducer structure
- Reinforced material sliding system and long-lasting roller balls with specially designed double bearing system.
- Adjustable vice pressure system
- Band saw system with double bearing structure that increases the cutting precision.
- Efficient coolant pump motor
- Chip brush
- High quality electrical system
- CE standard





Standard Accessories

- Double Roll material stand 40 cm
- 5 Roll material stand 1.5 mt
- · Bi-metal saw blade mounted on the machine

| MODEL | TA360 | | |
|-------------------------|------------------------|--|--|
| Motor Power | 2,2 kW, 380 V | | |
| Cutting Angle | - | | |
| Vice Clamping | Hydraulic | | |
| Saw Blade Dimensions | 34x1,1x4560mm | | |
| Cutting Capacity | ● 360mm; ■ 360x360 mm; | | |
| | 400x300 mm | | |
| Speed | 14 - 100 m/min | | |
| Step | Inverter / Variable | | |
| Material feeding height | 760 mm | | |
| Clamp Opening Range | 0 - 450 mm | | |
| Clamp Height | 230 mm | | |
| Driving Motor Power | 0.37 kW | | |
| Hydraulic Motor Power | 0.18 kW | | |
| Cooling Engine Power | 0.12 kW | | |
| Machine Dimensions | 2470x1350x1300 mm | | |
| Weight | 815 Kg | | |



TA360 (Full Auto)

Hydraulic/Automatic head travel

Automatic material feeding

Hydraulic/Automatic material clamping

Optional Accessories:

Replacement saw band: 45603/4


34x1,1x4560mm- 3/4 tpi

45604/6 34x1,1x4560mm- 4/6 tpi

45605/8 34x1,1x4560mm-5/8 tpi



Topçular Endüstriyel Üretim ve Yatırım A.Ş. reserves the right to make changes in model, technical specifications, color, equipment & accessories without prior notice.



 \triangleleft \triangleright













FULL-AUTOMATIC BANDSAW MA

TA300M


MITRE CUTTING

- Unlimited steps in the range of 20-100 mt/min with inverter speed regulation/Vario system
- Digital speedometer
- Ergonomic control panel providing ease of use.
- Special design cast pulleys
- · Hydro-mechanical band tensioning
- · High quality main motor
- Special designed strong reducer structure
- Reinforced material sliding system and long-lasting roller balls with specially designed double bearing system.
- Adjustable vice pressure system
- Band saw system with double bearing structure that increases the cutting precision
- Efficient coolant pump motor
- Chip brush
- · High quality electrical system
- CE standard



Standard Accessories

- 5 Roll material stand
- 2 Roll material stand
- Bi-metal saw blade mounted on the machine

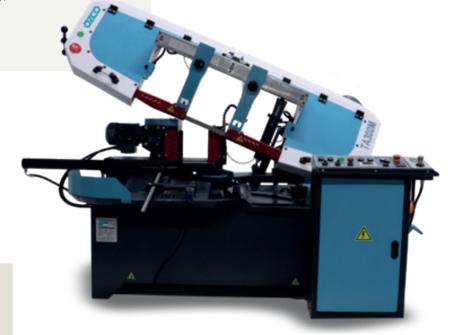

| MODEL | ТАЗООМ | | |
|-------------------------|--|--|--|
| Motor Power | 1,5 kW, 380 V | | |
| Cutting Angle | 0°-45° | | |
| Vice Clamping | Hydraulic | | |
| Saw Blade Dimensions | 27x0,9x3960mm | | |
| Cutting Capacity | ● 300mm; ■ 300x300 mm; ■ 240x330 mm | | |
| Speed | 20 - 100 m/min | | |
| Step | Inverter / Variable | | |
| Material feeding height | 760 mm | | |
| Clamp Opening Range | 0 - 335 mm | | |
| Clamp Height | 190 mm | | |
| Driving Motor Power | 0.37 kW | | |
| Hydraulic Motor Power | 0.18 kW | | |
| Cooling Engine Power | 0.12 kW | | |
| Machine Dimensions | 2260x1260x1430 mm | | |
| Weight | 800 Kg | | |

Made in

Hydraulic/Automatic material clamping

Hydraulic/Automatic head travel Automatic material feeding

Optional Accessories:

Replacement saw band: 39603/4

27x0,9x3960mm- 3/4 tpi

39604/6 27x0,9x3960mm-4/6 tpi

39605/8 27x0,9x3960mm-5/8 tpi

Topçular Endüstriyel Üretim ve Yatırım A.Ş. reserves the right to make changes in model, technical specifications, color, equipment & accessories without prior notice.



FULL-AUTOMATIC BANDSAW MACHINE

TA360M

MITER CUTTING

- Unlimited steps in the range of 14-100 mt/min with inverter speed regulation/Vario system
- Angle adjustment from vise up to 45°
- Digital speedometer
- Ergonomic control panel providing ease of use.
- Material support
- Special design cast pulleys
- Hydro-mechanical band tensioning
- · High quality main motor
- Special designed strong reducer structure
- Reinforced material sliding system and long-lasting roller balls with specially designed double bearing system.
- Adjustable vice pressure system
- Band saw system with double bearing structure that increases the cutting precision.
- Efficient coolant pump motor
- Chip brush
- High quality electrical system
- CE standard



Standard Accessories

- Double Roll material stand 40 cm
- 5 Roll material stand 1.5 mt
- · Bi-metal saw blade mounted on the machine

| MODEL | TA360M |
|-------------------------|--|
| Motor Power | 2,2 kW, 380 V |
| Cutting Angle | 0°-45° |
| Vice Clamping | Hydraulic |
| Saw Blade Dimensions | 34x1,1x4560mm |
| Cutting Areas 0° | ● 360mm; ■ 360x360 mm; ■ 400x300 mm |
| Cutting Areas 45° | ● 250mm; ■ 230x230 mm; ■ 200x360 mm |
| Speed | 14 - 100 m/min |
| Step | Inverter / Variable |
| Material feeding height | 760 mm |
| Clamp Opening Range | 0 - 450 mm |
| Clamp Height | 230 mm |
| Driving Motor Power | 0.37 kW |
| Hydraulic Motor Power | 0.18 kW |
| Cooling Engine Power | 0.12 kW |
| Machine Dimensions | 2620x1460x1300 mm |
| Weight | 905 Kg |

TA360M (Full Auto)

Hydraulic/Automatic material clamping Hydraulic/Automatic head travel Automatic material feeding



Made in

Optional Accessories:

Replacement saw band: 45603/4

34x1,1x4560mm- 3/4 tpi

45604/6

34x1,1x4560mm- 4/6 tpi

45605/8 34x1,1x4560mm-5/8 tpi



Topçular Endüstriyel Üretim ve Yatırım A.Ş. reserves the right to make changes in model, technical specifications, color, equipment & accessories without prior notice.

