
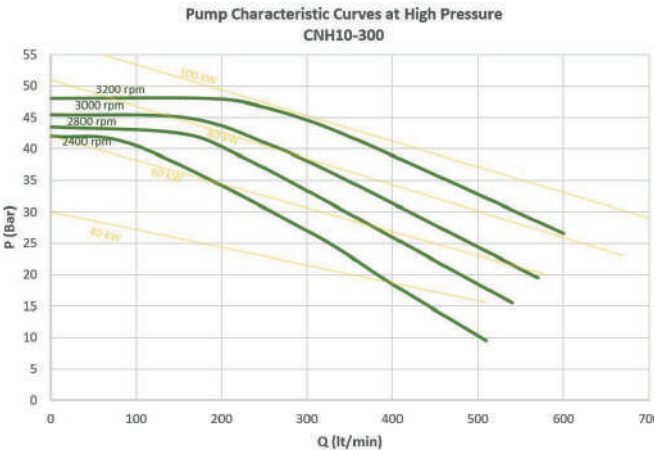


TECHNICAL SPECIFICATIONS

3000 SERIES	CN 10-300 (RPM Increaser)	CN 10-300(ML)
Low Pressure Flow Rate	3000 l/min (792 gpm)	3000 l/min (792 gpm)
High Pressure Flow Rate	-	-
Normal Pressure	10 bar (145 psi)	10 bar (145 psi)
Normal Pump Speed	3000 rev/min (rpm)	3000 rev/min (rpm)
Maximum Pump Speed	3200 rev/min (rpm)	3200 rev/min (rpm)
Minimum Idle Speed	700 rev/min (rpm)	700 rev/min (rpm)
Minimum Suction Speed	2500 rev/min (rpm)	2500 rev/min (rpm)
Maximum Suction Speed	3200 rev/min (rpm)	3200 rev/min (rpm)
Maximum Pressure	17 bar (246 psi)	17 bar (246 psi)
Weight	109 kg (240 lbs)	87 kg (192 lbs)
Suction Speed, 7.5 m depth	30 seconds	30 seconds
Operating Temperature	-15 °C (5 °F) / +55 °C (131 °F)	-15 °C (5 °F) / +55 °C (131 °F)
Dimensions (L x W x H) (mm/inch)	845 X 787 x 618 (33.3 x 31 x 24.4)	845 x 818 x 618 (33.3 x 32.2 x 24.4)
Thermal Drain Valve	72 °C (161 °F)	72 °C (161 °F)
Reducer Ratio Options	1/2,04 - 1/2,55 - 1/2,95	1/1

3000 SERIES	CNH 10-300 (RPM Increaser)	CNH 10-300(ML)
Low Pressure Flow Rate	3000 l/min (792 gpm)	3000 l/min (792 gpm)
High Pressure Flow Rate	40 bar 250-400 l/min (66-105 gpm)	40 bar 250-400 l/min (66-105 gpm)
Normal Pressure	10 bar (145 psi)	10 bar (145 psi)
Normal Pump Speed	3000 rev/min (rpm)	3000 rev/min (rpm)
Maximum Pump Speed	3200 rev/min (rpm)	3200 rev/min (rpm)
Minimum Idle Speed	700 rev/min (rpm)	700 rev/min (rpm)
Minimum Suction Speed	2500 rev/min (rpm)	2500 rev/min (rpm)
Maximum Suction Speed	3200 rev/min (rpm)	3200 rev/min (rpm)
Maximum Pressure	54,5 bar (790 psi)	54,5 bar (790 psi)
Weight	122 kg (269 lbs)	112 kg (247 lbs)
Suction Speed, 7.5 m depth	30 seconds	30 seconds
Operating Temperature	-15 °C (5 °F) / +55 °C (131 °F)	-15 °C (5 °F) / +55 °C (131 °F)
Dimensions (L x W x H) (mm/inch)	845 x 827 x 741 (33.3 x 32.6 x 29.2)	845 x 857 x 741 (33.3 x 33.7 x 29.2)
Thermal Drain Valve	72 °C (161 °F)	72 °C (161 °F)
Reducer Ratio Options	1/2,04 - 1/2,55 - 1/2,95	1/1

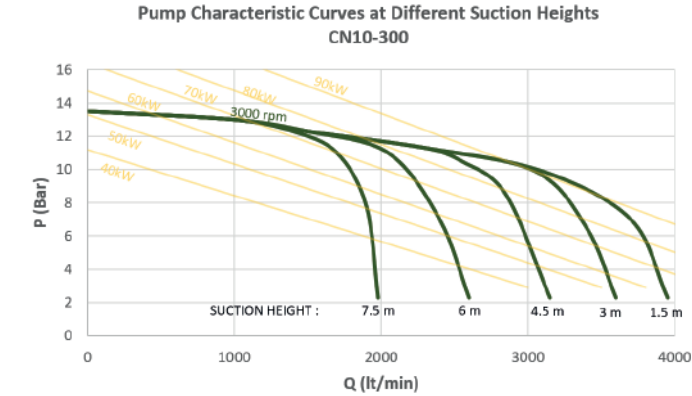

TS EN 1028, Iso 9001, Iso 14001, Iso 18001, CE ve Gost-R



celiksanaracustu celiksan.co celiksan


www.celiksan.com

Ekrem Demirtaş Caddesi No: 37
İtob Organize Sanayi Bölgesi, 35868 Menderes / İzmir / Turkey
+ 90 232 254 57 27 info@celiksan.com



BOSPHORUS SERIES

CN 10-300
CNH 10-300 / 40-250

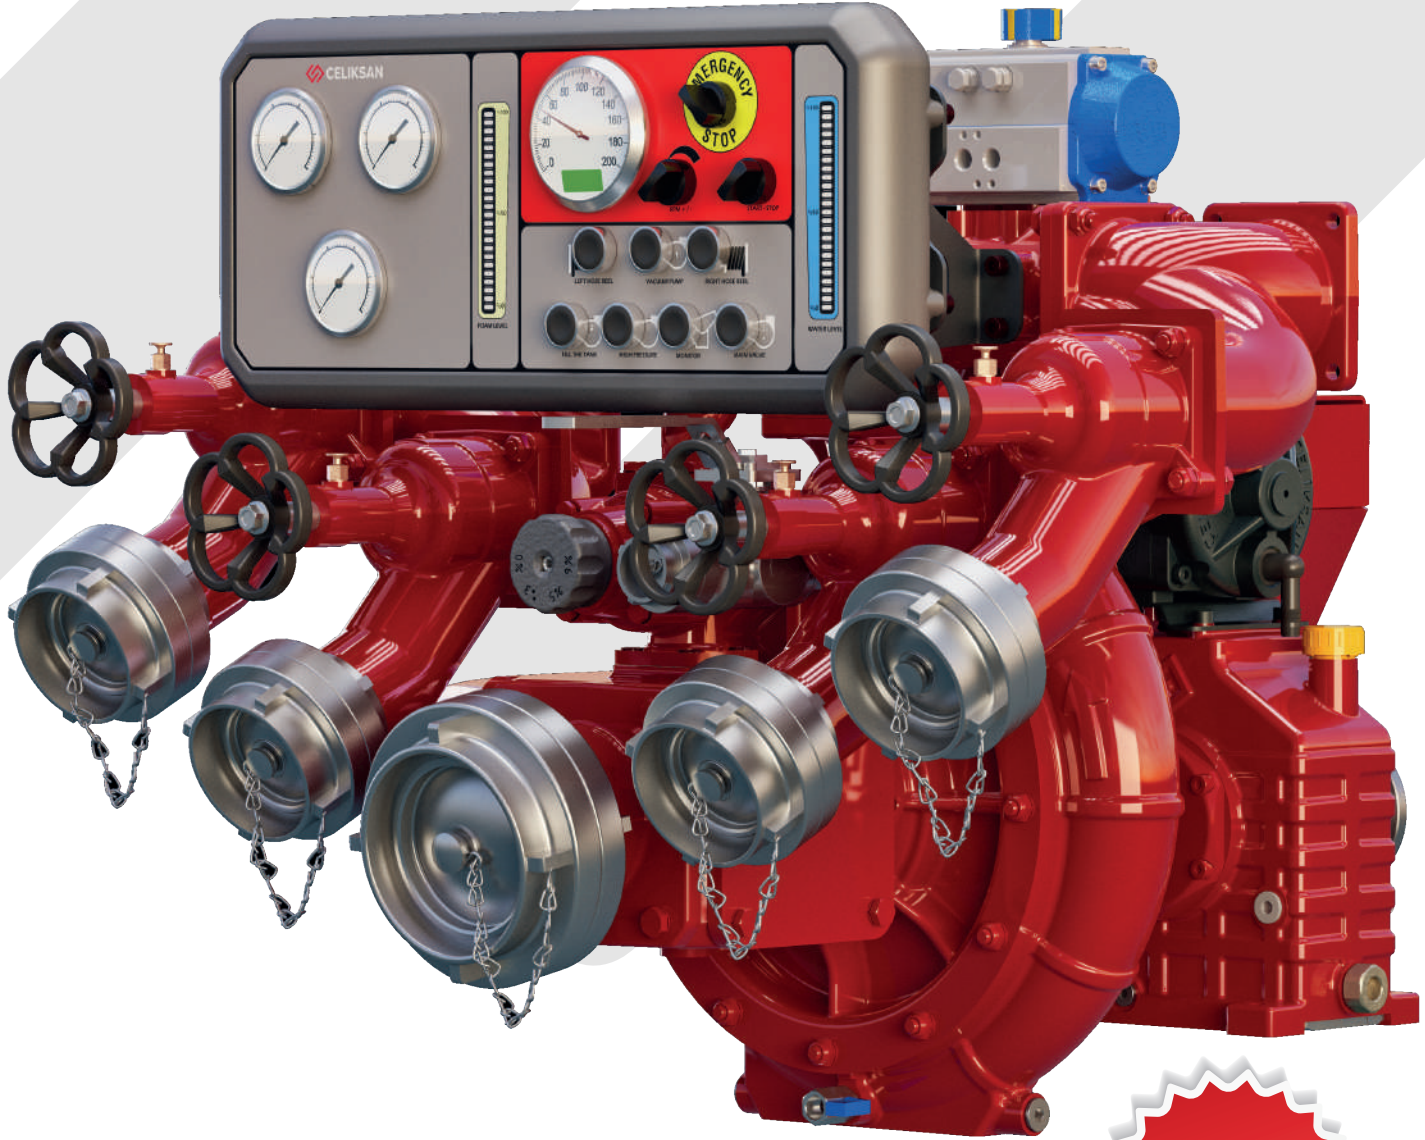

 **CELIKSAN**
one brand

SINCE 1976

BOSPHORUS SERIES

CN 10-300



General Features

Low pressure pump

Compatible with a wide range of modifications

Complies with EN 1028 standards
(Document No: 056632)

Maintenance-free mechanical seal
and vacuum pump

Lightweight alloy, high quality
anodized aluminum body

Suitable Mounting design for vehicles
all over the world

High performance automatic suction system

Low pressure with single stage aluminum fan

Low sound level

Hot water tank for use in cold climates

Thermal drain valve 72°C

CN 10-300 Fire Pumps;

It is the patented pioneer series of Celiksan company. This series, which is one of the world's market cornerstones, provides a service that never disappoints by providing unparalleled performance in the segment of fire pumps developed through research and development studies, where competition is at the highest level with its modern lines.

Options

Distribution valve options (straight, angled, flanged)

Various adapter options

Body that can rotate clockwise and counterclockwise

Control Panel

Foam proportioning system




Modular collector (distributor) system

Bronze body option


Reducer ratio options (1/2,04 - 1/2,55 - 1/2,95)

Oil cooling system for reducer pumps

Mechanical oil pressure control in reducer pumps

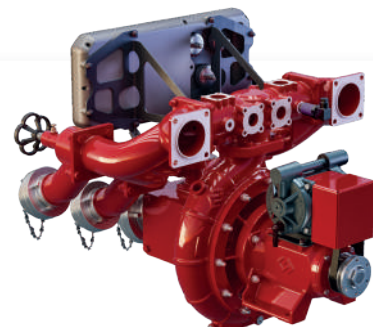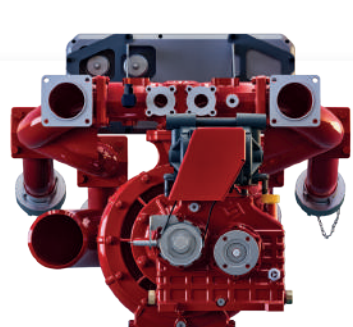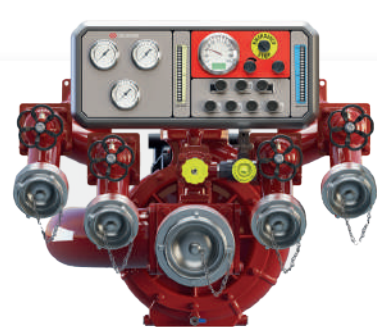

BOSPHORUS SERIES

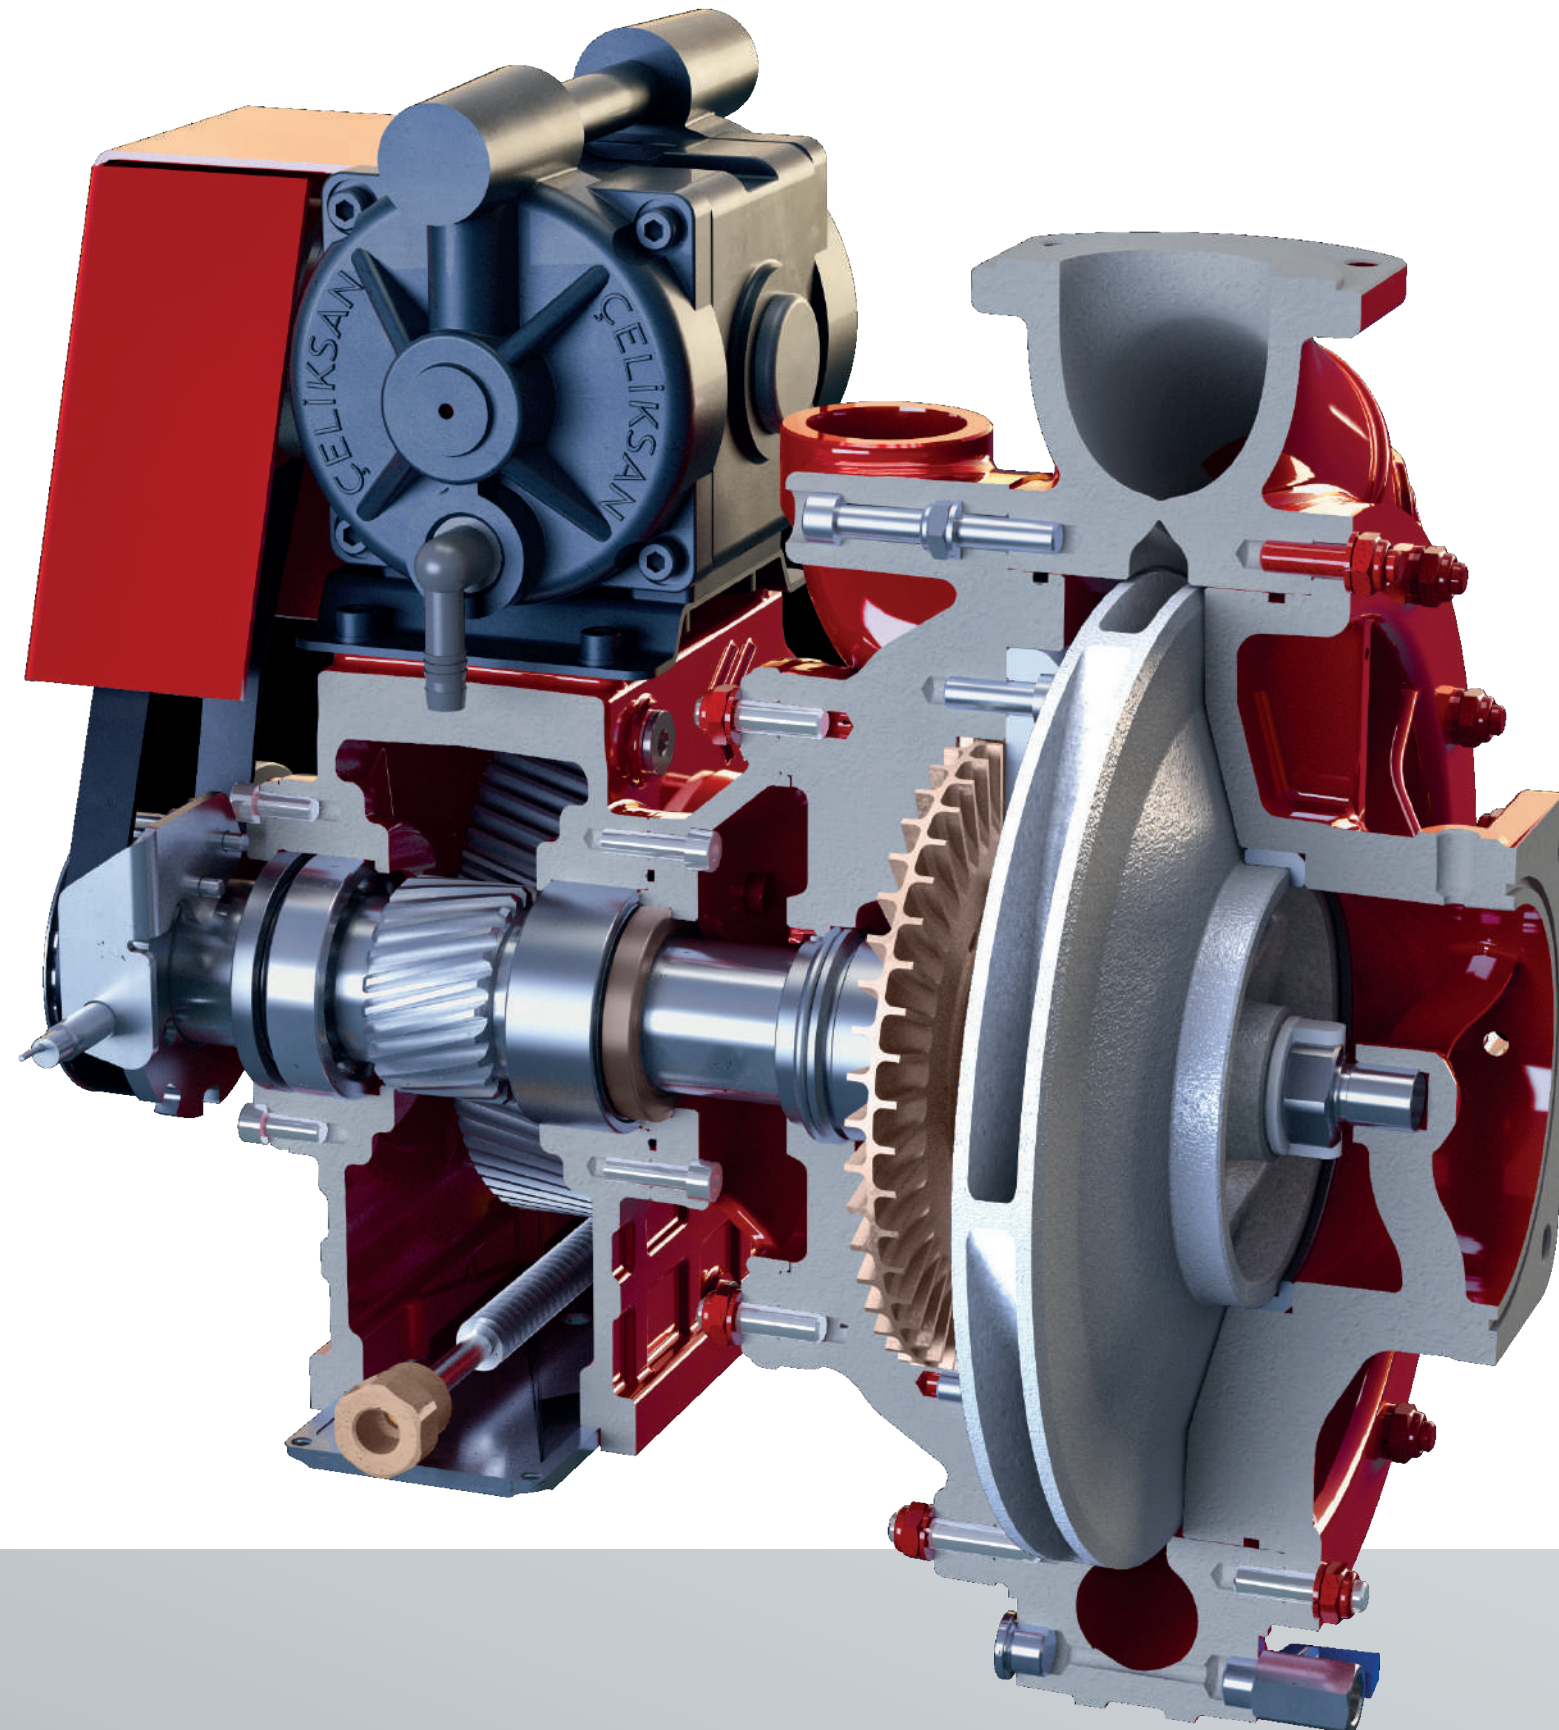

BOSPHORUS SERIES

CNH 10-300 / 40-250



General Features

Low and high pressure pump

Compatible with a wide variety of modifications

Complies with EN 1028 standards
(Document No: 056632)

Maintenance-free mechanical seal
and vacuum pump

Easy to clean high pressure filter

Light alloy high quality anodized aluminum body

Suitable mounting design for vehicles
all over the world

High performance automatic suction system

Low pressure single stage aluminum fan

High pressure single stage bronze fan

High pressure by-pass system

Low sound level

Hot water tank for use in cold climate

Thermal drain valve 72°C

CN 10-300 / 40-250

Fire Pumps;

It is the patented pioneer series of Celiksan company. This series, which is one of the world's market cornerstones, provides a service that never disappoints by providing unparalleled performance in the segment of fire pumps developed through research and development studies, where competition is at the highest level with its modern lines.

Options

Distribution valve options (straight, angled, flanged)

Various adapter options

Body that can rotate clockwise and counterclockwise

Control Panel

Foam proportioning system

Modular collector (distributor) system

Bronze body option

Reducer ratio options (1/2,04 - 1/2,55 - 1/2,95)

Oil cooling system for reducer pumps

Mechanical oil pressure control in reducer pumps

