

AGORA

S E R I E S

CN 10-400

General Features

- › Low pressure pump
- › Compatible with a wide range of modifications
- › Complies with EN 1028 standards (Document No: 056632)
- › Maintenance-free mechanical seal and vacuum pump
- › Lightweight alloy, high quality anodized aluminum body
- › Suitable mounting design for vehicles all over the world
- › High performance automatic suction system
- › Low pressure with single stage aluminum fan
- › Low sound level
- › Hot water tank for use in cold climates
- › Thermal drain valve 72°C



 **CELIKSAN**

FIRE TRUCK EQUIPMENT



one
brand

FIRE TRUCK EQUIPMENT

Technical Specifications


AGORA
S E R I E S
CN 10-400

4000 SERIES


CN 10-400(ML)

Low Pressure Flow Rate	4000 l/min (1056 gpm)
High Pressure Flow Rate	-
Normal Pressure	10 bar (145 psi)
Normal Pump Speed	3000 rev/min (rpm)
Maximum Pump Speed	3200 rev/min (rpm)
Minimum Idle Speed	700 rev/min (rpm)
Minimum Suction Speed	2400 rev/min (rpm)
Maximum Suction Speed	3600 rev/min (rpm)
Maximum Pressure	17 bar (246 psi)
Suction Speed, 7.5 m depth	30 seconds
Operating Temperature	-15 °C (5°F) / +55 °C (131 °F)
Thermal Drain Valve	72 °C (161 °F)
Power (KW)	130 KW
Weight	98 Kg
Dimensions (LxWxH) mm	542 x 484 x 553 mm

Pump Characteristic Curves PERFORMANCE EXPERIMENT
CN10-400

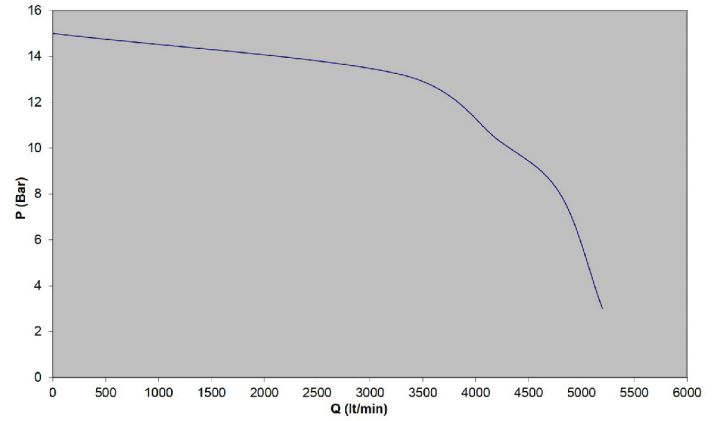

Strong &
Reliable

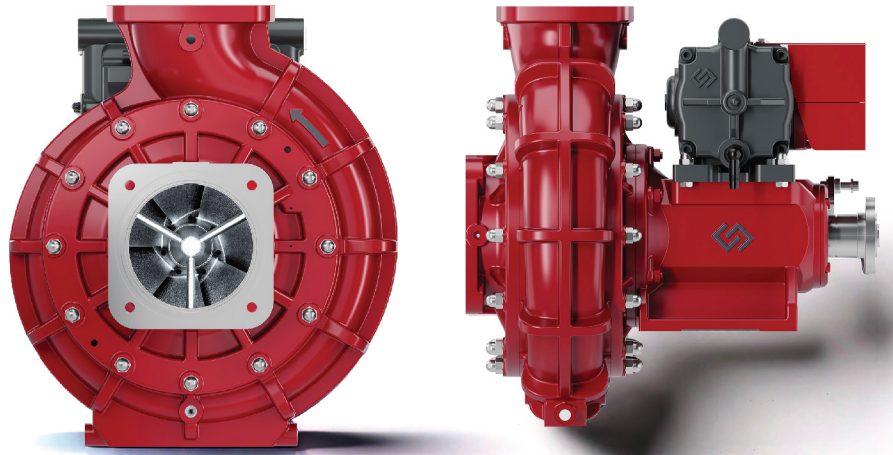

 **CELIKSAN**

Ekrem Demirtaş Caddesi No: 37

İtob Organize Sanayi Bölgesi, 35868 Menderes / İzmir / Turkey

+90 232 254 57 27 info@celiksan.com

Since 1978

TS EN 1028, Iso 9001, Iso 14001, Iso 18001, CE ve Gost-R



 celiksa narac ustü  celiksan.co  celiksan

celiksan.com