

COMPRESSED AIR FILTER

RDF
SERIES



MINIMUM
PRESSURE LOSS



EASY
INSTALLATION



OPTIONAL
AUTOMATIC DRAIN
PRODUCTION




OPTIONAL
CONTAMINATION
INDICATOR
PRODUCTION

Compressed Air, Oil and Dust Removal Filters



TECHNICAL DATA

Model	Connection Size	Flow Rate m ³ /h	Maximum Working Pressure (Bar)	Dimensions		Weight (Kg)
				A	B	
RDF - 20	1/2"	72	16	110	243	1
RDF - 35	3/4"	132	16	95	275	1,3
RDF - 50	1"	186	16	120	300	2,2
RDF - 60	1"	222	16	120	300	2,3
RDF - 110	1-1/2"	390	16	120	400	2,4
RDF - 140	1-1/2"	510	16	120	400	2,5
RDF - 180	1-1/2"	660	16	120	565	4,1
RDF - 215	2"	900	16	175	570	7
RDF - 335	2"	1200	16	175	695	8,2
RDF - 500	3"	1800	16	210	655	9,2
RDF - 750	3"	2700	16	210	815	11
RDF - 835	3"	3000	16	210	980	12,3

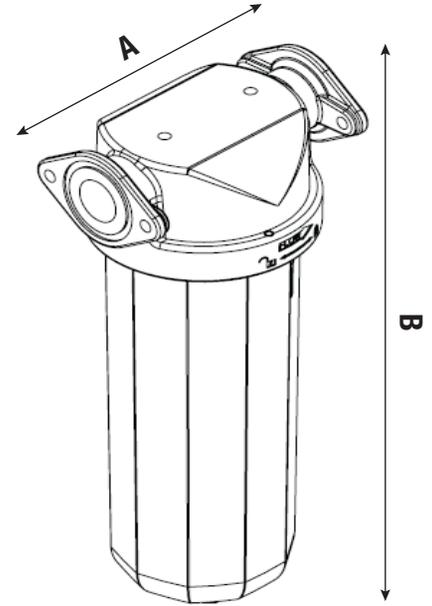

PRODUCT REFERENCE

- In the inlet filter, particle filtration down to 1 micron and oil vapor filtration down to 0.5 mg/m³ is achieved.
- In the outlet filter, particle filtration down to 0.1 micron and oil vapor filtration down to 0.01 mg/m³ is achieved.
- In the activated carbon filter, oil vapor filtration down to 0.003 mg/m³ is achieved.
- Technical specifications are given for an ambient temperature of 21°C.
- The stated flow rate values correspond to an operating pressure of 7 bar(g).

OUR COMPANY MAY CHANGE THE VALUES IN THE CATALOGUE ACCORDING TO THE RESEARCH AND DEVELOPMENT STUDIES.